

Godox

Godox

GODOX Photo Equipment Co.,Ltd.

Factory Add: 4th Floor of Building 1, 1st to 4 th Floor of Building 2, 4th Floor of Building 3,1st to 4th Floor of Building 4,  
Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China

TEL: +86-(0)755-25701197,25726373

FAX: +86-(0)755-25723423

Email: godox@godox.com

www.godox.com

f Knowled Global

Knowled Global

knowled\_global

Knowled Global

# KNOWLED CINEMATIC LIGHTING ECOSYSTEM

2025 | 4th  
EDITION





# *Knowled Take You Further*

At Godox, we have always been dedicated to providing a comprehensive range of lighting solutions for filmmakers and content creators. KNOWLED series, in particular, stands as a testament to our commitment to elevating the standards of professional production.

In the dynamic world of film and television production, lighting plays a pivotal role in shaping narratives, evoking emotions, and capturing moments in their full splendor. With KNOWLED cinematic lighting ecosystem, we empower filmmakers with the tools they need to bring their creative visions to life.





# CONTENTS

05	•	<b>COB Light</b> MG6K MG2400R MG2400Bi MG1200R MG1200Bi M1000R M600R M600Bi Pro/M600Bi M300R	
43	•	<b>MS Series</b> MS60R/Bi	
47	•	<b>Focusing Light</b> S60/S60Bi	
53	•	<b>Panel Light</b> P600Bi Hard P600R Hard/P1200R Hard P1200R Hard PRO/P600R Hard PRO P300R/P600R	
73	•	<b>Flexible LED Mat</b> F100R/F200R/F200SR/F400R/F800R F200Bi/F400Bi/F600Bi	
85	•	<b>Tube Light</b> TP2R/TP4R/TP8R	
91	•	<b>Air Tube Light</b> AT200Bi	
95	•	<b>Ambient Light</b> C5R/C7R/C10R	
101	•	<b>Cine Lighting Reflector</b> LiteFlow 7/15/25/50/100	
109	•	<b>Control System</b> KNOWLED APP	
111	•	<b>Accessory</b> BeamLight Max90 BeamLight B60/Max60 <i>G Mount Projection Attachment</i> GP19K/26K/36K <i>Flat Bowens Mount Projection Attachment</i> BP-19K/26K/36K <i>Bowens Mount Projection Attachment</i> VSA-19K/26K/36K DL5 Parallel Booster <i>Fresnel Lens</i> GF14/FLS8/FLS10 <i>Adjustable Diffusion</i> AD21/AD32/AD33 <i>Scrim Flag</i> SF6090/SF4560 Kit <i>Parabolic Softbox</i> QR-P70/P90/P120 <i>Softbox Series</i> SB Series <i>Lighting Stands</i>	



# KNOWLED COB LIGHTS





SPECS

Model	MG6K	MG2400R	MG2400Bi	MG1200R	MG1200Bi
Luminance(with reflector)	41,000 Lux with MGR30 @5m(5600K)	32,100 Lux with Gr45 @3m(5600K)	4,650lux with GR45 @10m(5600K)	118000Lux with GR15 @3m(5600K)	149,000Lux with GR15 @3m(5600K)
Color Version	Bi-color	Full-color	Bi-color	Full-color	Bi-color
CCT	2800K-10000K	1800K-10000K	2800K-6500K	1800-10000K	2800K-6500K
Max. Power	4300W	2650W	2600W	1600W	1400W
Color Rending	CRI≥97/TLCI≥97 DMX(RDM)/LumenRadio CRMX/	CRI≥94/TLCI≥92 DMX(RDM)/LumenRadio CRMX/	CQS≥95/CRI≥96/TLCI≥96	CRI≥96/TLCI≥95	CQS≥94/CRI≥96/TLCI≥96/ RI5≥92/TM-30 RF≥92
Controls	Ethernet (Art-Net & sACN)/ Bluetooth app/controller	Ethernet (Art-Net & sACN)/ Bluetooth app/controller	CRMX/Ethernet/DMX/ Removable panel/App/On-board	CRMX/Ethernet/DMX/ Removable panel/APP/On-board	CRMX/Ethernet/DMX/Removable panel/ App/On-board/Remoter
Power Supply	AC	AC	AC	AC	AC
Dimension					
Light Body	356*378*434mm	16.1*15.16*14.02"/409*385*356mm	409*385*356mm	400*589*339mm	378*579*354mm
Controller	270*210*421mm	11.02*16.54*8.27"/280*420*210mm	280*420*210mm	189*174*404mm	162*190*372mm
Weight					
Light Body	25kg	21kg	22kg	9.8kg	16kg
Controller	12kg	12kg	13kg	6.7kg	6.68kg



SPECS

Model	M1000R	M600R	M600Bi Pro	M300R
Luminance(with reflector)	20,400 Lux with Gr30 @3m(5600K)	136,000Lux with BR45 @1m(5600K)	18800Lux with BR60 @3m(5600K)	3880Lux with BR30 @5m(5600k)
Color Version	Full-color	Full-color	Bi-color	Full-color
CCT	1800K-10000K	1800K-10000K	2800K-6500K	1800K-10000K
Max. Power	1150W	720W	650W	460W
Color Rending	CRI≥95/TLCI≥94 DMX(RDM)/LumenRadio CRMX/	CQS≥95/CRI≥96/TLCI≥96	CRI≥97/TLCI≥98	CRI≥96, TLCI≥95
Controls	Ethernet (Art-Net & sACN)/ Bluetooth app/controller	CRMX/Ethernet/DMX/ App/On-board	DMX/LumenRadio CRMX/Etherne/Art-Net&sACN protocol/ Bluetooth app/remove controller control (controller is sold separately)	DMX 512 controller, support RDM protocol/ LumenRadio CRMX/Ethernet/Art-Net&sACN protocol/Bluetooth app/controller control
Power Supply	AC	AC	AC	AC & V-mount Battery
Dimension				
Light Body	7.8*7.4*14.53"/198*188*369mm	317*501*347mm	174*298*177mm	7.09*9.61*6.14"/180.09*244.09*155.96mm
Controller	7.44*6.34*12.64"/189*161*321mm	189*166*334mm	189*166*334mm	6.85*5.67*9.8"/174.09*144.02* 248.92mm
Weight				
Light Body	8.1kg	10kg	4.6kg	3.6kg
Controller	5.6kg	6kg	5.5kg	3.1kg





Brighter  
Than a 6kW HMI



Lightweight  
Design



Wide CCT range:  
2800K-10000K



Adjustable +/-  
Green Magenta



Comprehensive  
G-mount ecosystem

## MG6K

- Illuminance surpasses a 6kW HMI in brightness
- 24.5 kg/54 lb lighthead without yoke (28 kg/61 lb with yoke)
- CCT range: 2800K-10000K
- ±100% Green/Magenta adjustment
- 0.1% precision dimming increments
- 4 dimming curves
- CRI≈97, TLCI≈97
- 11 built-in FX modes
- Compatible with G-mount accessory ecosystem
- IP54-rated weather resistance
- High-efficiency heat dissipation
- Control options: DMX (RDM), LumenRadio CRMX, Ethernet (Art-Net & sACN), Bluetooth App, Controller



Bi Color LED Light | MG6K



**41,000** Lux  
@5600K, 5m (with MGR30 reflector)

**132,000** Lux  
@5600K, 5m (with MGR15 reflector)



+/- Green/Magenta Adjustment



Lightweight Design



Multiple-Light Arrays



Bi Color LED Light | MG6K



MG6K			
Light Body	x1	Safety Rope	x1
U-type Bracket	x1	DC Power Cord	x1
Controller	x1	AC Power Cord	x1
Protection Cover	x1	Reflector MGR30	x1
Tying Rope	x1		



MG6K K1			
Light Body	x1	DC Power Cord	x1
U-type Bracket	x1	AC Power Cord	x1
Controller	x1	Reflector MGR30	x1
Protection Cover	x1	Controller Mounting Device	x1
Tying Rope	x1	Flight Case	x1
Safety Rope	x1		





POWER  
2650<sub>w</sub>  
Power 2650W

  
Full Color Adjustable

  
G-Mount

  
Built-in CRMX

IP54  
Weatherproof

## MG2400R

- 2650W high brightness full-color LED
- Instant switch between white and RGB colors
- CCT: 1800K-10000K
- ±100% Green/Magenta adjustment
- Complete G-mount accessory ecosystem
- Optimized optical system for maximum output efficiency
- Supports Projection, Fresnel, BeamLight, Softbox, and more
- Rugged build for heavy-duty on-set use
- Full IP54 weather-resistance
- Flicker-free at high frame rates
- KNOWLED color management for fixture consistency
- Control options: CRMX, DMX, Ethernet, Bluetooth, controller



Full-color LED Light | MG2400R



Native Optics, Maximum Performance



High Output, Infinite Colors



Complete G-mount Accessory Ecosystem

Full-color LED Light | MG2400R



MG2400R

Light Body	×1	Controller Mounting Device	×1
U-type Bracket	×1	Tying Rope	×1
Controller	×1	Safety Rope	×1
Protection Cover	×1	DC Power Cord	×1
Reflector GR45	×1	AC Power Cord	×1
Industrial Plug (varies by country)	×1		



MG2400R K1

Light Body	×1	Tying Rope	×1
U-type Bracket	×1	Safety Rope	×1
Controller	×1	DC Power Cord	×1
Protection Cover	×1	AC Power Cord	×1
Reflector GR45	×1	Storage Bag SC18	×1
Controller Mounting Device	×1	Storage Bag SC19	×1
Industrial Plug (varies by country)	×1		



MG2400R K2

Light Body	×1	Controller Mounting Device	×1
U-type Bracket	×1	Tying Rope	×1
Controller	×1	Safety Rope	×1
Protection Cover	×1	DC Power Cord	×1
Reflector Gr45	×1	AC Power Cord	×1
Industrial Plug (varies by country)	×1		



Bi-color LED Light | MG2400Bi

Bi-color LED Light | MG2400Bi



POWER  
**2600<sub>w</sub>**  
Power 2600W

**IP54**  
Weather Resistance

  
2800K-6500K

  
G-Mount

  
4,410lux@10m  
with 45° Reflector

## MG2400Bi

- CCT: 2800-6500K
- 2600W power across all color temperatures
- CQS≥95, CRI≥96, TLCI≥96
- Controls: DMX & RDM, LumenRadio CRMX, Ethernet (sACN and ArtNet protocol), App control, on-board and removable panel
- Compatible with Godox G-Mount with a complete light shaping system
- IP54 weather resistance
- 0.1% stepless adjustment
- High efficient heat dissipation system
- 4 dimming curves
- 11 built-in FX effects
- 360° rotatable U-Type yoke
- 8-meters power cord and connecting cord



Bi-color LED Light | MG2400Bi



MG2400Bi

Light Body	×1	Protection Cover	×1
Yoke	×1	Safety Wire	×1
Controller	×1	Main Cable	×1
Antenna	×1	DC Cable	×1
Reflector	×1	Tying Rope	×1
Clamp	×1		

MG2400Bi K1 Kit

Light Body	×1	Safety Wire	×1
Yoke	×1	Main Cable	×1
Controller	×1	DC Cable	×1
Antenna	×1	Tying Rope	×1
Reflector	×1	Soft Case for Light Body SC18	×1
Clamp	×1	Soft Case for Accessory SC19	×1
Protection Cover	×1		

MG2400Bi K2 Kit

Light Body	×1	Protection Cover	×1
Yoke	×1	Safety Wire	×1
Controller	×1	Main Cable	×1
Antenna	×1	DC Cable	×1
Reflector	×1	Tying Rope	×1
Clamp	×1	Flight Case FC05	×1


Bi-color LED Light | MG2400Bi







POWER  
**1500<sub>w</sub>**  
High Output

  
Full Color

  
Lightweight Design

  
G-Mount Accessories

## MG1200R

- Full-Color Lighting 1800K-10000K range for versatile effects.
- 1500W power with vivid color saturation.
- HSI, RGBW, GEL, X-Y, CCT, FX for creative use.
- Seamless Integration with Entire Setup.
- Only 9.8kg for easy handling.
- 0.1% precision for low-light adjustments.
- Flicker-Free at High Speeds.
- DMX, CRMX, Ethernet, Bluetooth with app integration.
- Leading Accessory Ecosystem.





Full-Color LED Light | MG1200R



Exceptional Lighting Performance



Full-color Stage shooting



Built for Easy Handling



### MG1200R

Light Head	×1	Super Clamp	×1
Controller	×1	Tying Rope	×1
Protective Cover	×1	Safety Rope	×1
U-Bracket	×1	DC Power Cord	×1
Gr45 Reflector	×1	AC Power Cord	×1



### MG1200R K2

Light Head	×1	Tying Rope	×1
Controller	×1	Safety Rope	×1
Protective Cover	×1	DC Power Cord	×1
U-Bracket	×1	AC PowerCord	×1
GR45 Reflector	×1	Protective Wheeled Case	×1
Super Clamp	×1		

Full-Color LED Light | MG1200R



### MG1200R K1

Light Head	×1	Tying Rope	×1
Controller	×1	Safety Rope	×1
Protective Cover	×1	DC Power Cord	×1
U-Bracket	×1	AC Power Cord	×1
GR45 Reflector	×1	Carrying Case	×1
Super Clamp	×1		



### MG1200R K3

Light Head	×1	Tying Rope	×1
Controller	×1	Safety Rope	×1
Protective Cover	×1	DC Power Cord	×1
U-Bracket	×1	AC Power Cord	×1
GR45 Reflector	×1	Flight Case	×1
Super Clamp	×1		



Bi-color LED Light | MG1200Bi



Bi-color LED Light | MG1200Bi



POWER  
**1200w**  
Power 1200W

**IP54**  
Weather Resistance

  
2800K-6500K

  
G-Mount

  
86,100lux@3m  
with Fresnel

## MG1200Bi

- CCT: 2800-6500K
- 1200W power across all color temperatures
- CQS≥94, CRI≥96, TLCI≥96, R15≥92, TM-30 Rf≥92
- Controls: DMX & RDM, LumenRadio CRMX, Ethernet (sACN and ArtNet protocol), App control, 2.4GHz remote, on-board and removable panel
- Compatible with Godox G-Mount with a complete light shaping system
- IP54 weather resistance
- 0.1% stepless adjustment
- High efficient heat dissipation system
- 4 dimming curves
- 11 built-in FX effects
- 360° rotatable U-Type yoke
- 8-meters power cord and connecting cord





Bi-color LED Light | MG1200Bi



Night-for-day lighting



Studio set lighting



Sunlight-through-windows simulation

Bi-color LED Light | MG1200Bi



MG1200Bi

Light Body	×1	Power Cable	×1
U-type Bracket	×1	Carry Bag	×1
Controller	×1	Controller Mounting Device PC01	×1
Antenna	×1	Light Protection Cover	×1
Steel Rope	×1	DC Connect Cable	×1
Reflector GR45	×1		



MG1200Bi K2 (4 reflectors included)

Light Body	×1	DC Connect Cable	×1
U-type Bracket	×1	15° Reflector GR15	×1
Controller	×1	30° Reflector GR30	×1
Antenna	×1	45° Reflector GR45	×1
Steel Rope	×1	60° Reflector GR60	×1
Power Cable	×1	Soft Case SC01	×1
Controller Mounting Device PC01	×1	Reflector Case 2	×1
Light Protection Cover	×1		



MG1200Bi K1 (3 reflectors included)

U-type Bracket	×1	DC Connect Cable	×1
Controller	×1	30° Reflector GR30	×1
Antenna	×1	45° Reflector GR45	×1
Steel Rope	×1	60° Reflector GR60	×1
Power Cable	×1	Soft Case SC01	×1
Controller Mounting Device PC01	×1	Reflector Case 1	×1
Light Protection Cover	×1		



MG1200Bi K3 (4 reflectors & hard case included)

Light Body	×1	DC Connect Cable	×1
U-type Bracket	×1	15° Reflector GR15	×1
Controller	×1	30° Reflector GR30	×1
Antenna	×1	45° Reflector GR45	×1
Steel Rope	×1	60° Reflector GR60	×1
Power Cable	×1	Hard Case HC01	×1
Controller Mounting Device PC01	×1	Reflector Case 2	×1
Light Protection Cover	×1		



Reflector For MG6K



MGR15  
15° Reflector (for MG6K)



MGR30  
30° Reflector (for MG6K)

Fresnel Lens



GF14  
Fresnel Lens



GF18M  
Motorized Fresnel Lens



GF14B  
Barndoor for Fresnel Lens

Reflector For MG1200R/Bi MG2400R/Bi



GR15  
15° Reflector




GR30  
30° Reflector



GR45  
45° Reflector



GR60  
60° Reflector



GR45B  
Barndoors



GR30B  
Barndoors

Softbox



GL3/GL4/GL7  
Lantern Softboxes



GP3/GP4/GP5  
Parabolic Softboxes



GS33/GS34/GS44  
Rectangular Softboxes



GO3/GO4/GO5  
Octa Softboxes

Liteflow



LiteFlow  
Reflector

Projection Attachment GP19/26/36K For MG6K



GP26K  
Projection Attachment  
With 26° Lens



Lens 19°   Lens 26°   Lens 36°   Iris Diaphragm  
GP-ID



Gobo Set GP-GS2



Gobo Set GP-GS1



Gobo Set GP-GS3



Gobo Set GP-GS4



Gobo Set GP-GS5

Soft Case & Flight Case



SC18  
Soft Case for Light Body (for MG2400Bi/R)




SC19  
Soft Case for Accessory (for MG2400Bi/R)



FC05  
Flight Case (for MG2400Bi/R)



FC07  
Flight Case (for MG6K)



GP-SKID  
Skid for GP(for MG2400R/Bi MG6K)



GP-QB  
Quick-Lock Bracket(for MG2400R/Bi MG6K)





Full-color Adjustable



High Power



Compact Design



Bowens Mount



IP54



Godox Optical System

## M1000R

- 1000W full-color point source with Bowens Mount
- Bright and saturated RGB output
- Compact and lightweight for fast, mobile setups
- Enhanced Bowens Mount for advanced optical modifiers
- Compatible with Godox Optical System for precise light control
- Wide CCT range (1800K–10,000K) with  $\pm 100\%$  G/M adjustment
- 14 built-in lighting effects
- IP54-rated weather resistance
- Built-in CRMX, supports DMX512, RDM, Art-Net, sACN, Bluetooth App



Full-color LED Light | M1000R



Lightweight Design, Built to Move



Bright, Bold, Full-Color Output



Godox Optical System, Native Integration

Full-color LED Light | M1000R



M1000R

Light Body	×1	Tying Rope	×1
U-type Bracket	×1	Safety Rope	×1
Controller	×1	DC Power Cord	×1
Protection Cover	×1	AC Power Cord	×1
Reflector BR30	×1	Controller Mounting Device	×1



M1000R K1

Light Body	×1	Safety Rope	×1
U-type Bracket	×1	DC Power Cord	×1
Controller	×1	AC Power Cord	×1
Protection Cover	×1	Controller Mounting Device	×1
Reflector BR30	×1	Carrying Case	×1
Tying Rope	×1		



Full-color LED Light

Full-color LED Light | M600R



Ultra-BrightColors

IP54

Weather-Resistance



DMX/CRMX



Godox KNOWLED App

## M600R

- Full-color capability
- CCT: 1800K-10000K
- Color light brightness greatly surpassing similar lights at equal power
- 136,000 lux with Reflector BR45 at 1 meter
- Innovative optical design for high-quality output, reduced heat, and longer lifespan
- IP54 weather-resistance
- CQS≥95, CRI≥96, TLCI≥96
- Flicker-free performance
- Extreme temperature performance even under -20°C
- Controls: DMX, CRMX, Ethernet (sACN and ArtNet protocol), Bluetooth app control, on-board
- Bowens Mount



Full-color LED Light

5600K:136000Lux  
R: 25100Lux G: 33700Lux B: 10600Lux  
@1m(with Reflector BR45)

Full-color LED Light | M600R

What’s in the Box




Light Body	×1	Yoke	×1
Reflector BR45	×1	Light Protection Cover	×1
AC Power Cord	×1	DC Cable	×1
Safety Wire	×1	Pipe Clamp	×1
Controller	×1	Soft Case SC20	×1
Tying Rope	×1		






POWER  
**650<sub>w</sub>**  
650W output

**IP54**  
Weatherproof

  
2800K-6500K

  
CRMX/DMX/  
Ethernet/Bluetooth

**M600Bi Pro**

- CCT: 2800K - 6500K
- IP54 weather resistance
- Smoother, more linear dimming
- Pairs seamlessly with the B60 for parallel beams
- Controls: DMX, CRMX, Ethernet, Bluetooth, and on-board control
- exceptional durability and reliability
- Precise 0.1% dimming control
- 11 Build-in FX effects
- CRI of 97 and TLCI of 98
- Bowens mount for wide compatibility



**M600Bi Pro**

- |                            |    |
|----------------------------|----|
| Light Body                 | ×1 |
| Controller                 | ×1 |
| Protection Cover           | ×1 |
| U-type Bracket             | ×1 |
| Reflector BR30             | ×1 |
| Tying Rope                 | ×1 |
| Safety Rope                | ×1 |
| DC Power Cord              | ×1 |
| AC PowerCord               | ×1 |
| Controller Mounting Device | ×1 |



**M600Bi Pro K1**

- |                            |    |
|----------------------------|----|
| Light Body                 | ×1 |
| Controller                 | ×1 |
| Protection Cover           | ×1 |
| U-type Bracket             | ×1 |
| Reflector Br30             | ×1 |
| Tying Rope                 | ×1 |
| Storage Bag                | ×1 |
| Safety Rope                | ×1 |
| DC Power Cord              | ×1 |
| AC PowerCord               | ×1 |
| Controller Mounting Device | ×1 |



Full Color LED Light | M300R



POWER  
**460W**  
460W output

1800K-10000K

Lightweight Design

Bowens Mount

**M300R**


- Bowens Mount for easy accessory installation with quick-lock
- Lightweight body (3.6kg)
- CRI≈96/TLCI≈95
- Multiple Color Modes: CCT/HSI/RGBW/GEL/X-Y/FX (14 FX effects)
- 1800K-10000K wide CCT range with GM adjustment (-100%~+100%)
- 0.0%-100.0% dimming with 4 dimming curves
- 20 Preset Scenes to save and recall customized light effects
- Power Options: AC 100-240V & 14.8V V-mount battery
- Full IP54 Protection
- Multi-control Methods: DMX512/CRMX/Ethernet/Bluetooth app/controller
- Quick-install U-bracket for flexible positioning and stable mounting

Bowens Mount Accessory Ecosystem for M1000R/M600R/M600Bi Pro/M300R

Optional Purchase



BF10  
Fresnel

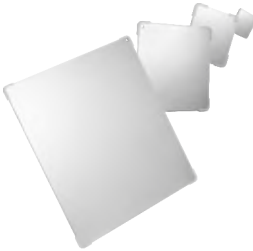

LiteFlow  
Reflector



B60  
BeamLight Reflector



CS-D  
Lantern Softbox




SB-BW-35160  
Strip Softbox



SB-FW-120  
Octa Softbox



SB-FW-70-100  
Rectangular Softbox

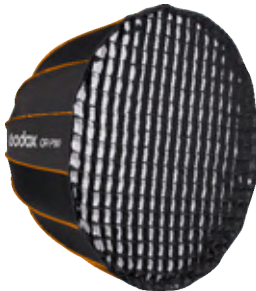


QR-P  
Parabolic Softbox



QR-PT  
Quick Release Parabolic Softbox




BP36K  
Projection Attachment  
With 36° Lens



Lens 19°



Lens 26°



Gobo Set VSA-GS1



Gobo Set VSA-GS2



Gobo Set VSA-GS3



Gobo Set VSA-GS4



CB38  
Lens Portabe Bag



VSA-ID  
Iris Diaphragm



VSA-11C  
Color Effects Set



VSA-11T  
CCT Adjustment Set





- Compact Design
- Versatile Power Supply
- Godox Optical Ecosystem
- CRMX Control
- Godox Magnetic Mount

## MS60R/Bi

- All-new Godox magnetic mount
- Lightweight Body (311g)
- High-saturation & Full color
- Multiple Modes: CCT, HSI, RGBW, X-Y, FX
- CCT range from 1800K to 10000K(MS60R)
- 60W Power Supply
- Paired with the SZL2 zoom lens, compatible with S60Bi optical accessories
- Seamless Integration with Godox Optical Ecosystem
- Removable fast-charging battery and GaN power adapter
- Power Options: AC,DC 48V, USB-C ,NPF battery, V-mount batteries
- Powered via E27 socket, seamlessly blending into scenes as downlights, spotlights, or stage lights
- DMX512 Control/LumenRadio CRMX/Ethernet/Bluetooth app Control

## Full/Bi Color LED Light | MS60R/Bi



### SPECS

Model	MS60Bi	MS60R
Lithium Battery Parameters	DC14.4V, 3400mAh, 48.96Wh USB-C Input: 5V=3A, 9V=3A, 12V=2.5A, 20V=1.5A	DC14.4V, 3400mAh, 48.96Wh USB-C Input: 5V=3A, 9V=3A, 12V=2.5A, 20V=1.5A
Light Body USB-C Port Input	20V=3A Max 60W	20V=3A Max 60W
CCT	2800K-6500K	1800K-10000K
Brightness Range	0%-100%	0%-100%
Dimming Curves	linear, S-curve, exponential, logarithmic	linear, S-curve, exponential, logarithmic
FX Mode	11	14
CRI	Average≥97	Average≥95
TLCI	Average≥98	Average≥95
Controlling Methods	DMX 512 controller, support RDM protocol/ LumenRadio CRMX Bluetooth app control	DMX 512 controller, support RDM protocol/ LumenRadio CRMX Bluetooth app control
Bluetooth Controlling Distance	60m	60m
Working Environment Temperature	-20°C~40°C	-20°C~40°C
Dimension (without lens reflector and battery)	≈3.03"*3.03"*3.58"	≈3.03"*3.03"*3.58"
Netweight (without lens reflector and battery)	≈303g	≈311g






MS60R/Bi



Optional Purchase

MS60R/Bi 2K(2 Light Kit)

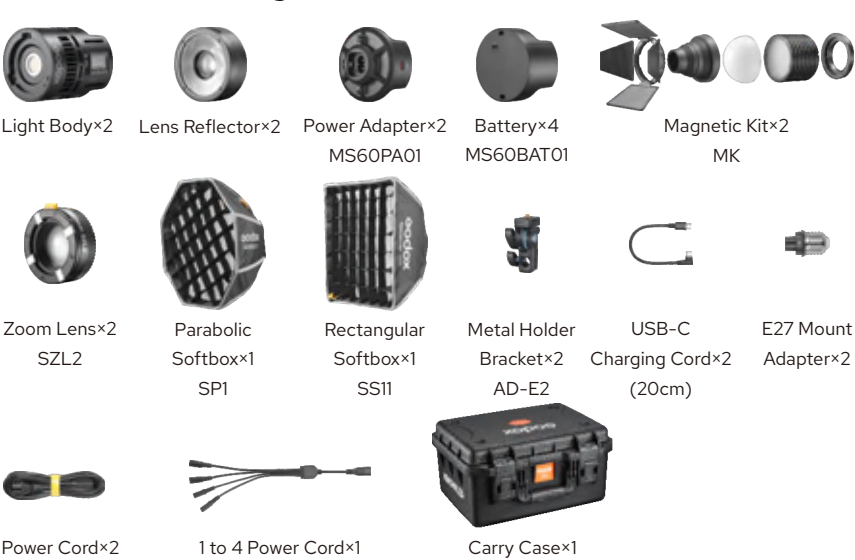


Optional Accessories



MS60R/Bi 4K(4 Light Kit)

Main Kit

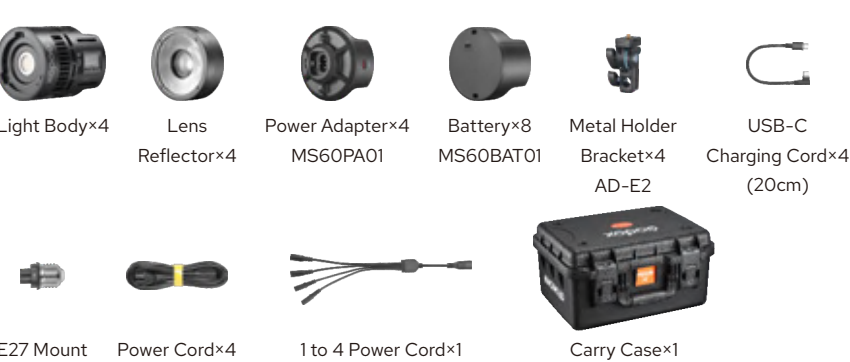

Accessories Kit







# FOCUSING LIGHTS



## SPECS

Model	S60	S60Bi
Power Supply	AC Power Supply: 100~240V 50/60HZ 0.9A MAX V-port battery: Standard voltage: 14.8V (optional)	AC Power Supply: 100~240V 50/60HZ 0.9A MAX V-port battery: Standard voltage: 14.8V (optional)
Output Power	60W	77W
CCT	5600K±300K	2800K±6500K
100% Illuminance(LUX)(1m,darkroom)(≈)	Spot (Central Area): 3200 Flood (Central Area): 40000	Spot (Central Area): 3200 Flood (Central Area): 40000
CRI/TLCI	≥96/≥97	≥96/≥97
Brightness Range	0~100%	0~100%
Channel(CH)	32 (1 to 32)	32 (1 to 32)
Group (GR)	16 (A to F/O to 9)	16 (A to F/O to 9)
Beam Angle	6°-55°	6°-55°
Working Environment Temperature	-10~40°C	-10~40°C
Control Method	Smartphone APP/2.4G wireless remote control/DMX control	Smartphone APP/2.4G wireless remote control/DMX control
2.4G Wireless Transmission Distance(≈)	50m	50m
Dimension	Light Body: 264*107*100mm/Controller: 268*113*64mm	Light Body: 264*107*100mm/Controller: 233*112*61mm
Weight	Light Body: 1.36kg/Controller: 0.94kg	Light Body: 1.36kg/Controller: 1kg





Beam Angle 6°-55°



2800-6500K(Bi)

CRI

96<sup>+</sup>

CRI≥96

TLCI

97<sup>+</sup>

TLCI≥97



Silent mode

## S60/S60Bi

- Beam angle from 6 to 55 degrees, light where you want
- Variable Color Temperature
- CRI≥96, TLCI≥97
- Lighting FX
- Silent mode
- Controls: Godox Light app, remoter, and DMX





Focusing Lights | S60/S60Bi



S60/S60Bi


Light Head	×1	Wrench	×1
Controller Box	×1	Connect Cable	×1
SA-08 Barndoor Set	×1	Power Cable	×1

Abundant Accessories



SA-08 Barndoor Set

Barndoor set: to precisely control the light beam as required. There are small clips on the plate for clipping diffusion fabric or gels on.

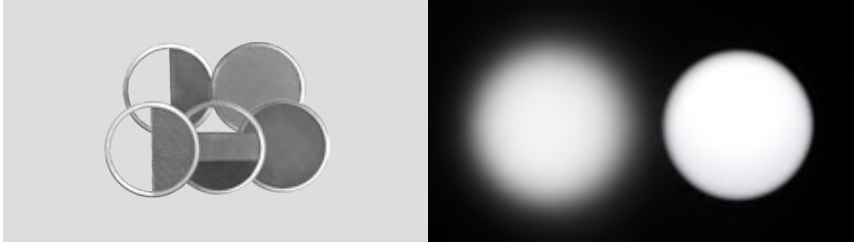

SA-05 Scrim set

To reduce the light intensity and control the light graduation.

Focusing Lights | S60/S60Bi

Projection attachment: project a highly focused and controlled beam of light. This attachment is what enables you to get the utmost out of creativity of Focusing light series for it is specially designed for fitting a vast range of light shaping accessories.



SA-30/SA-20 Softbox

Offers soft and even light effects.



SA-07 Scrim set

To reduce the light intensity and control the light graduation.



Simulating natural backgrounds



Adding atmosphere for scene



Product shooting





# PANEL LIGHTS



## SPECS

Model	P600Bi Hard	P600R Hard/P1200R Hard	P600R Hard PRO/P1200R Hard PRO	P300R/P600R
Luminance	11,400Lux @3m (5600K)	8,980Lux /17,100Lux @3m (5600K)	22,600Lux/16,245Lux @3m (5600K)	1,620Lux/3,230Lux @3m (5600K)
Color Version	Bi-color	Full-color	Full-color	Full-color
CCT	2800K-6500K	1800K-10000K	1800K-10000K	1800K-10000K
Max. Power	650W	700W/1500W	670W/1300W	350W/700W
Color Rendering	CQS≥93/CRI≥96/TLCI≥96	CQS≥95/CRI≥96/TLCI≥96	CRI≥96/TLCI≥98	CQS≥95/CRI≥96/TLCI≥96
Controls	CRMX/DMX/App/On-board/Remoter	CRMX/DMX/App/On-board	CRMX/DMX/App/On-board	CRMX/DMX/Ethernet/App/On-board
Power Supply	AC	AC	AC	AC/DC 48V
Dimension(Yoke included)	571*499*121mm	496*570*119mm/834*606*170mm	433*386*166mm/743*386*166mm	563*498*155mm/776*567*153mm
Weight	10kg	11.22kg/18.5kg	13kg/22kg	11.6kg/17.8kg



LED Light Panel | P600Bi Hard




LED Light Panel | P600Bi Hard



POWER  
**650<sub>w</sub>**  
Power 650W

  
2800K-6500K

  
93,800Lux at 1 meter

  
LumenRadio CRMX

**10<sub>KG</sub>**  
Lightweight 10KG

**P600Bi Hard**

- CCT: 2800K-6500K
- 650W full output across all color temperatures
- A 10kg 1x1 panel
- 93,800Lux at 1 meter
- Precisely designed optical lens
- CRI≥96, TLCI≥96
- 0.1% stepless adjustment from 0.1% to full power
- Controls: DMX & CRMX, App control, 2.4GHz remote, on-board
- Aerospace-grade heat dissipation



LED Light Panel | P600Bi Hard



Combined use as key light



Interior lighting



Green screen lighting solution


LED Light Panel | P600Bi Hard



P600Bi Hard

- Light Body ×1
- Tying Rope ×1
- Safety Rope ×1
- Hex Wrench ×1
- U-type Bracket ×1
- Antenna ×1
- AC Power Cable ×1

Optional Purchase

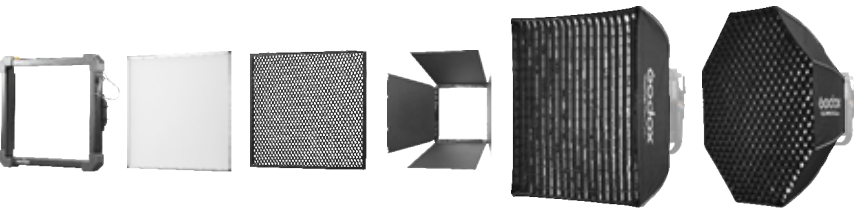

- P600RH AD Adapter
- P300RD Diffusion
- P300RH30 Honeycomb
- P300RB4 Barndoor
- P300RS33 Rectangular Softbox
- P300R04 Octa Softbox

Compatible with certain accessories of P300R when using Adapter P600RH AD

Optional Purchase




Space Light Softbox P600BHSS



Rectangular Softbox (24"x24") P600BHS22



2-light Bracket AB02

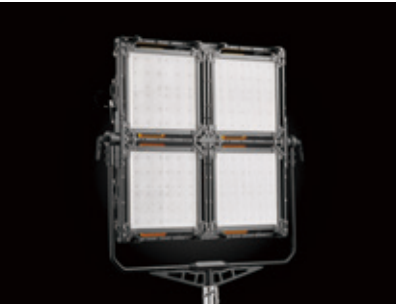

4-light Bracket AB04



Junior Offset Arm HJ02



Junior Multi-header HJ04



Softbox (2'x3') for AB02 AB02S23



Softbox (3'x3') for AB02 AB04S33





Full-Color  
Capability



Super Brightness



High Color  
Consistency



Compact and  
Lightweight



Hard/Soft  
Switching



Stable CRMX  
Control

## P600R Hard/P1200R Hard

- CCT: 1800K-10000K
- Full-color capability
- Super power in compact size:
  - P600R Hard: 650W 1×1 panel
  - P1200R Hard: 1200W 2×1 panel
- CQS≥95, CRI≥96, TLCI≥96
- Controls: DMX, CRMX, App, and on-board control
- Hard/soft switching with diffusion panels
- Precisely designed optical lens
- High efficient heat dissipation



LED Light Panel | P600R Hard/P1200R Hard



P600R Hard

Light Body	×1	Main Cable	×1
Metal Spacer	×2	Safety Wire	×1
Direction Adjusting Handle	×1	Screw	×1
Yoke	×1	HexWrench	×1
Plastic Spacer	×2		



P1200R Hard

Light Body	×1	Main Cable	×1
Metal Spacer	×2	Safety Wire	×1
Direction Adjusting Handle	×1		
Yoke	×1		
Plastic Spacer	×2		

Optional Purchase for P600R Hard



P600BHSS  
Space Light Softbox



P600BHS22  
Rectangular Softbox  
(24"×24")



SCH01  
Sling Chain



AB02  
2-Light Bracket



AB04  
4-Light Bracket



HJ02  
Junior Offset Arm



HJ04  
Junior Multi-Header

LED Light Panel | P600R Hard/P1200R Hard




AB02S23  
Softbox (2'x3') for AB02

AB04S33  
Softbox (3'x3') for AB04

Optional Purchase for P1200R




P1200RHSS  
Space Light Softbox



P1200RHS23  
Rectangular Softbox



SCH02  
Sling Chain

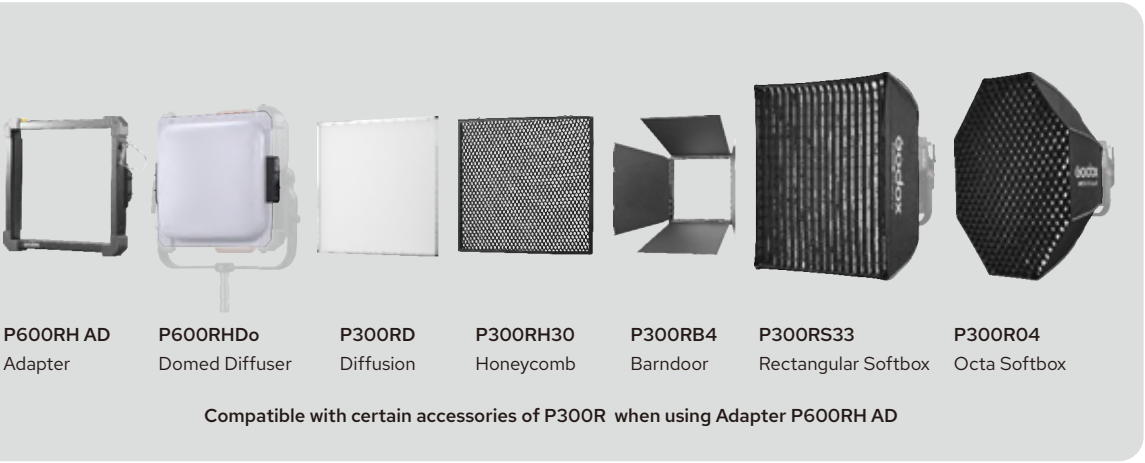

P600RH AD  
Adapter

P600RHDo  
Domed Diffuser

P300RD  
Diffusion


P300RH30  
Honeycomb

P300RB4  
Barn door

P300RS33  
Rectangular Softbox

P300R04  
Octa Softbox

Compatible with certain accessories of P300R when using Adapter P600RH AD

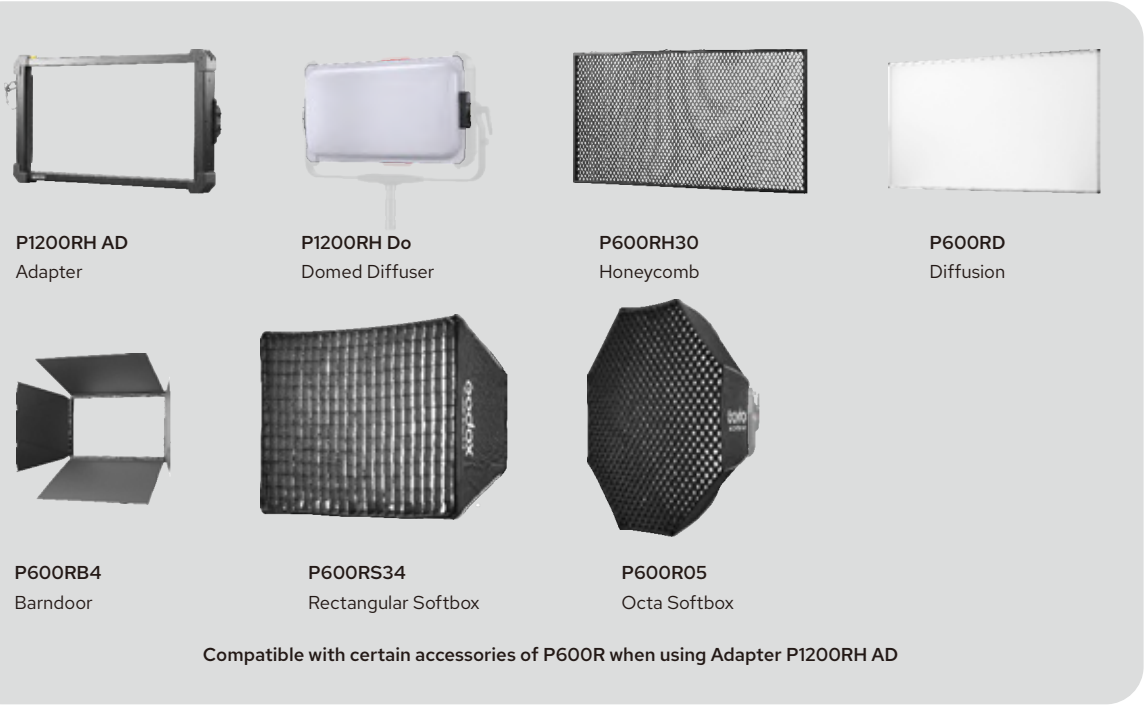

P1200RH AD  
Adapter

P1200RH Do  
Domed Diffuser

P600RH30  
Honeycomb

P600RD  
Diffusion

P600RB4  
Barn door

P600RS34  
Rectangular Softbox

P600R05  
Octa Softbox

Compatible with certain accessories of P600R when using Adapter P1200RH AD





POWER  
1300W

High Brightness  
(2x1 panel)

Full Color

IP65

Weatherproof

CRMX Built-In

Hard or Diffused


Support High Frame  
Rate Filming

## P600R Hard PRO/1200R Hard PRO

- 1300W in a compact 2x1 panel—unmatched punch in this form factor
- Full-color control
- Wide native beam angle of 50°~55° for large-area coverage
- IP65-rated for all-weather reliability
- High color accuracy: CRI 96+, TLCI 98+
- 1,800K–10,000K CCT range with G/M adjustment
- Flicker-free at high frame rates
- Built-in CRMX, DMX, Bluetooth and on-board control
- Compatible with a full range of accessories
- Quick-fit design for faster mounting and setup
- Custom dual/triple brackets for multi-light rigs
- Integrated PSU for cleaner setups and easier rigging



LED Light Panel | P600R Hard PRO/P1200R Hard PRO

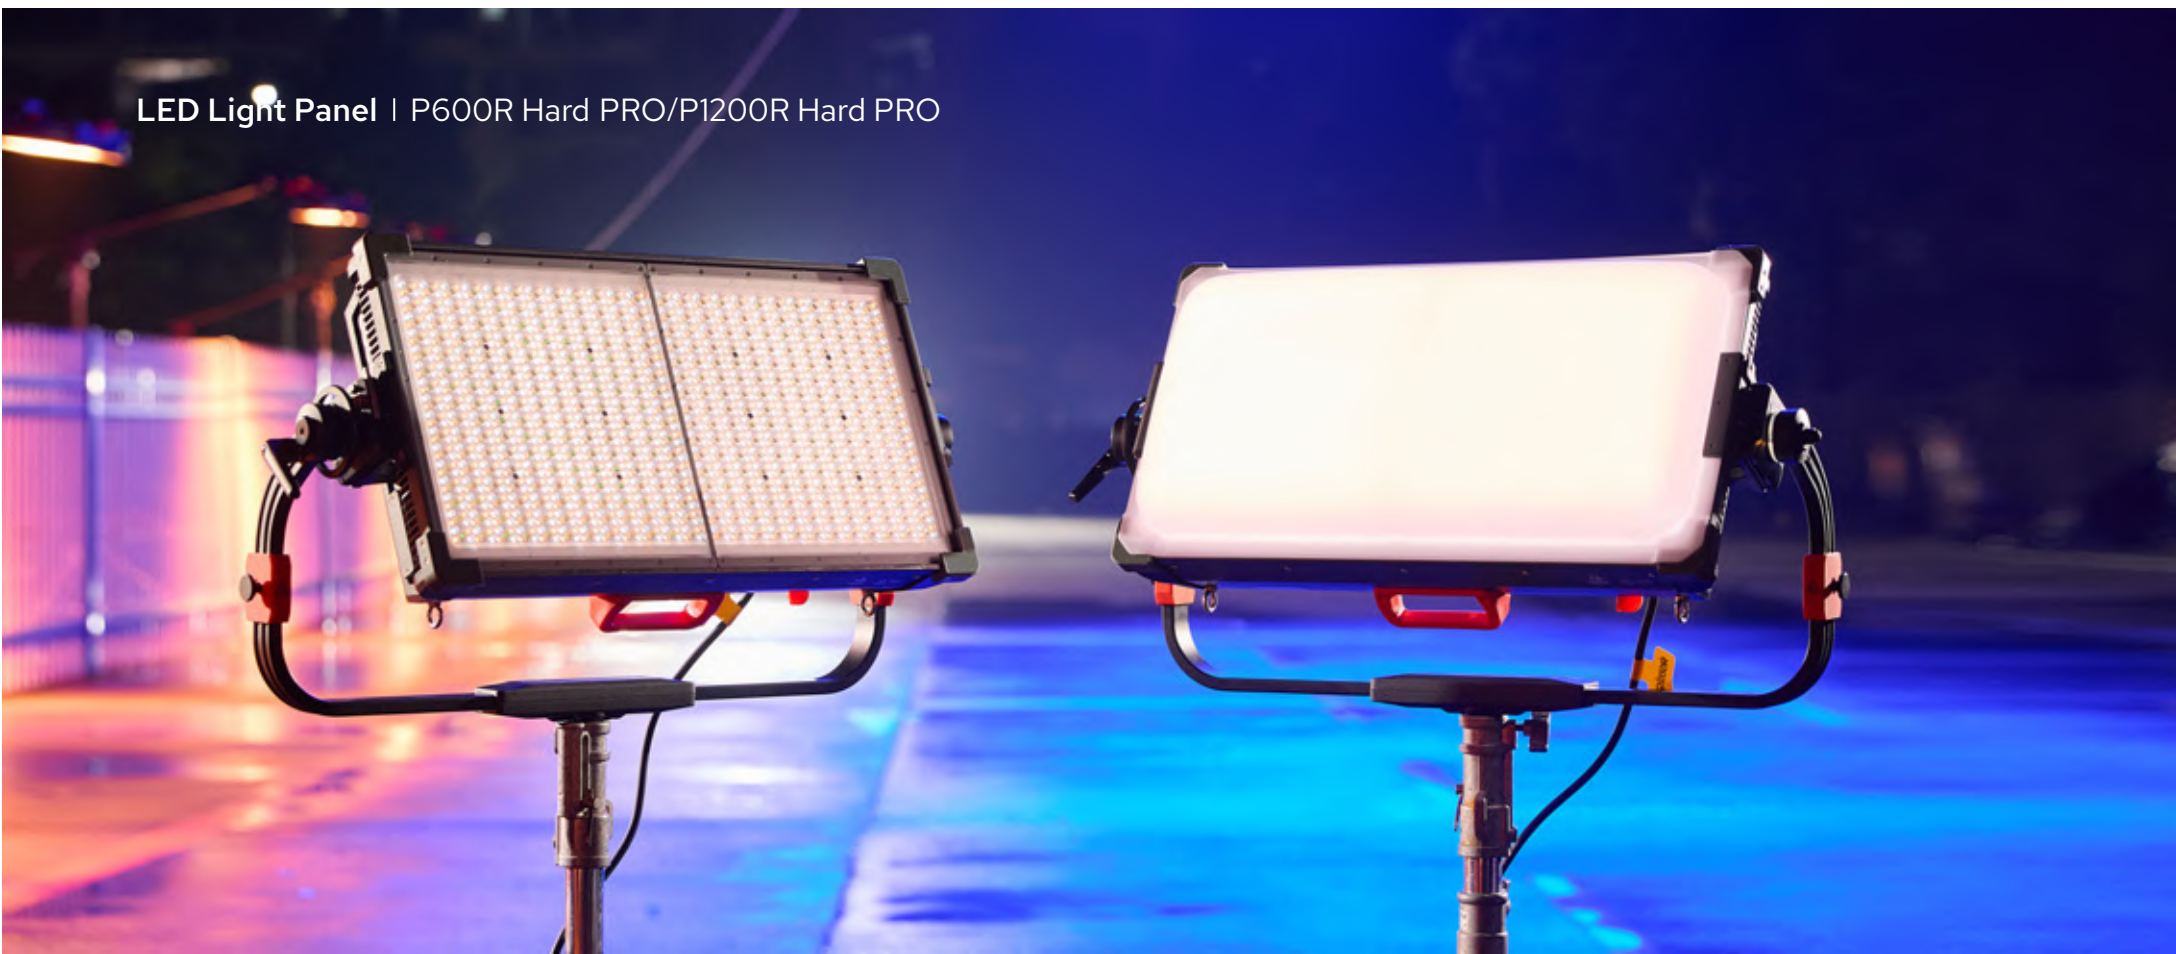

LED Light Panel | P600R Hard PRO/P1200R Hard PRO



Light Up Big Scenes with Ease



Full-Color Brilliance, Ideal for Creative Washes



Ready for Any Condition



LED Light Panel | P600R Hard PRO/P1200R Hard PRO



P1200R Hard PRO

Light Body	×1	AC Power Cord	×1
U-bracket	×1	Safety Rope	×1



P1200R Hard PRO K1

Light Body	×1	Safety Rope	×1
U-bracket	×1	Carry Case	×1
AC Power Cord	×1		

Optional Accessories for P1200R Hard PRO




P1200RHDø  
Domed Diffuser




P1200RHSS  
Space Light Softbox




SCH03  
Sling Chain



AB03-3  
3-light Bracket



AB02-3  
2-light Bracket



P1200RHS23  
Rectangular Softbox



P600R Hard PRO

Light Body	×1	AC Power Cord	×1
U-bracket	×1	Safety Rope	×1

LED Light Panel | P600R Hard PRO/P1200R Hard PRO



P600R Hard PRO K1

Light Body	×1	Safety Rope	×1
U-bracket	×1	Carry Case	×1
AC Power Cord	×1		

Optional Accessories for P600R Hard PRO



P600RHDø  
Domed Diffuser



P600BHSS  
Space Light Softbox



P600BHS22  
Rectangular Softbox(24"x24")



SCH01  
Sling Chain




HJ02  
Junior Offset Arm



HJ04  
Junior Multi-Header



Compatible with certain accessories of P600R when using Adapter P1200RH AD

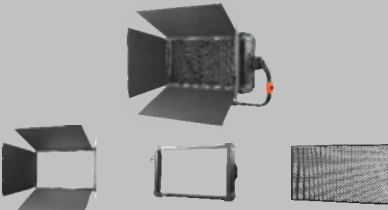


Combo examples  
P1200R Hard PRO+P1200RH AD  
+P600RH30+P600RB4



Compatible with certain accessories of P300R when using Adapter P600RH AD



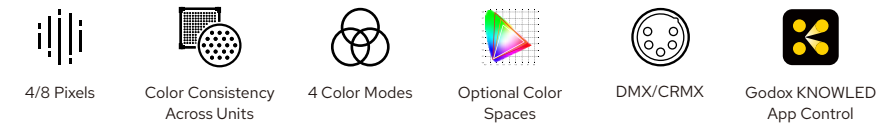

P300R/P600R

- Full-color capability
- CCT: 1800K-10000K
- Ideal for virtual production applications
- Compact size with higher pixel density in 1x1 ft (4 pixels) and 1x2 ft (8 pixels) options
- Godox's color calibration ensures consistent hues across all units from KNOWLED series
- Color spaces including Rec.2020, DCI-P3, and Rec.709
- High brightness with soft light quality
- Flicker-free performance
- CQS≥95, CRI≥96, TLCI≥96
- High-efficiency cooling fan for sustained performance
- Controls: DMX, CRMX, Ethernet, Bluetooth app control, on-board control
- Diverse accessory options available



LED Light Panel | P300R/P600R



P300R			
Light Body	×1	Safety Wire	×1
Typing Rope	×1	Main Cable	×1



P300R K1 Kit					
Light Body	×1	Main Cable	×1	Quick Setup Softbox	×1
Typing Rope	×1			Soft Case SC02	×1
Safety Wire	×1				



P600R			
Light Body	×1	Safety Wire	×1
Typing Rope	×1	Main Cable	×1



P600R K1 Kit					
Light Body	×1	Main Cable	×1	Quick Setup Softbox	×1
Typing Rope	×1			Soft Case SC04	×1
Safety Wire	×1				

Optional Purchase for P300R



P300RH30	Safety Wire	P300RB4	P300R11G	P300RS33+P300RS33G	P300R04+P300R04G	AB02	AB04
Honeycomb 30°	SW01	Barndoor	Grid(for Bare Light)	Softbox 3'x3'+Grid	Softbox Octa 4'+Grid	2-Light Bracket	4-Light Bracket



AB02S23	AB04S33	MC8B	P300RY02	P300RY03	P600BHSS	P600BHS22	SC02
Softbox (2'x3') for AB02	Softbox (3'x3') for AB04	Main Cable	P.O.Yoke	Double Vertical Yoke	Space Light Softbox	Rectangular Softbox (24"×24")	Soft Case

LED Light Panel | P300R/P600R

Optional Purchase for P600R




P600RH30	P600RB4	P600RS23+P600RS23G	P600RS34+P600RS34G	P600R05+P600R05G
Honeycomb 30°	Barndoor	Softbox 2'x3'+Grid	Softbox 3'x4'+Grid	Softbox Octa 5'+Grid




P600RY02	P600RY03	SC04	Safety Wire	Grid(for Bare Light)
P.O.Yoke	Double Vertical Yoke	Soft Case	SW01	P600R12G
			MC8B	
			Main Cable	



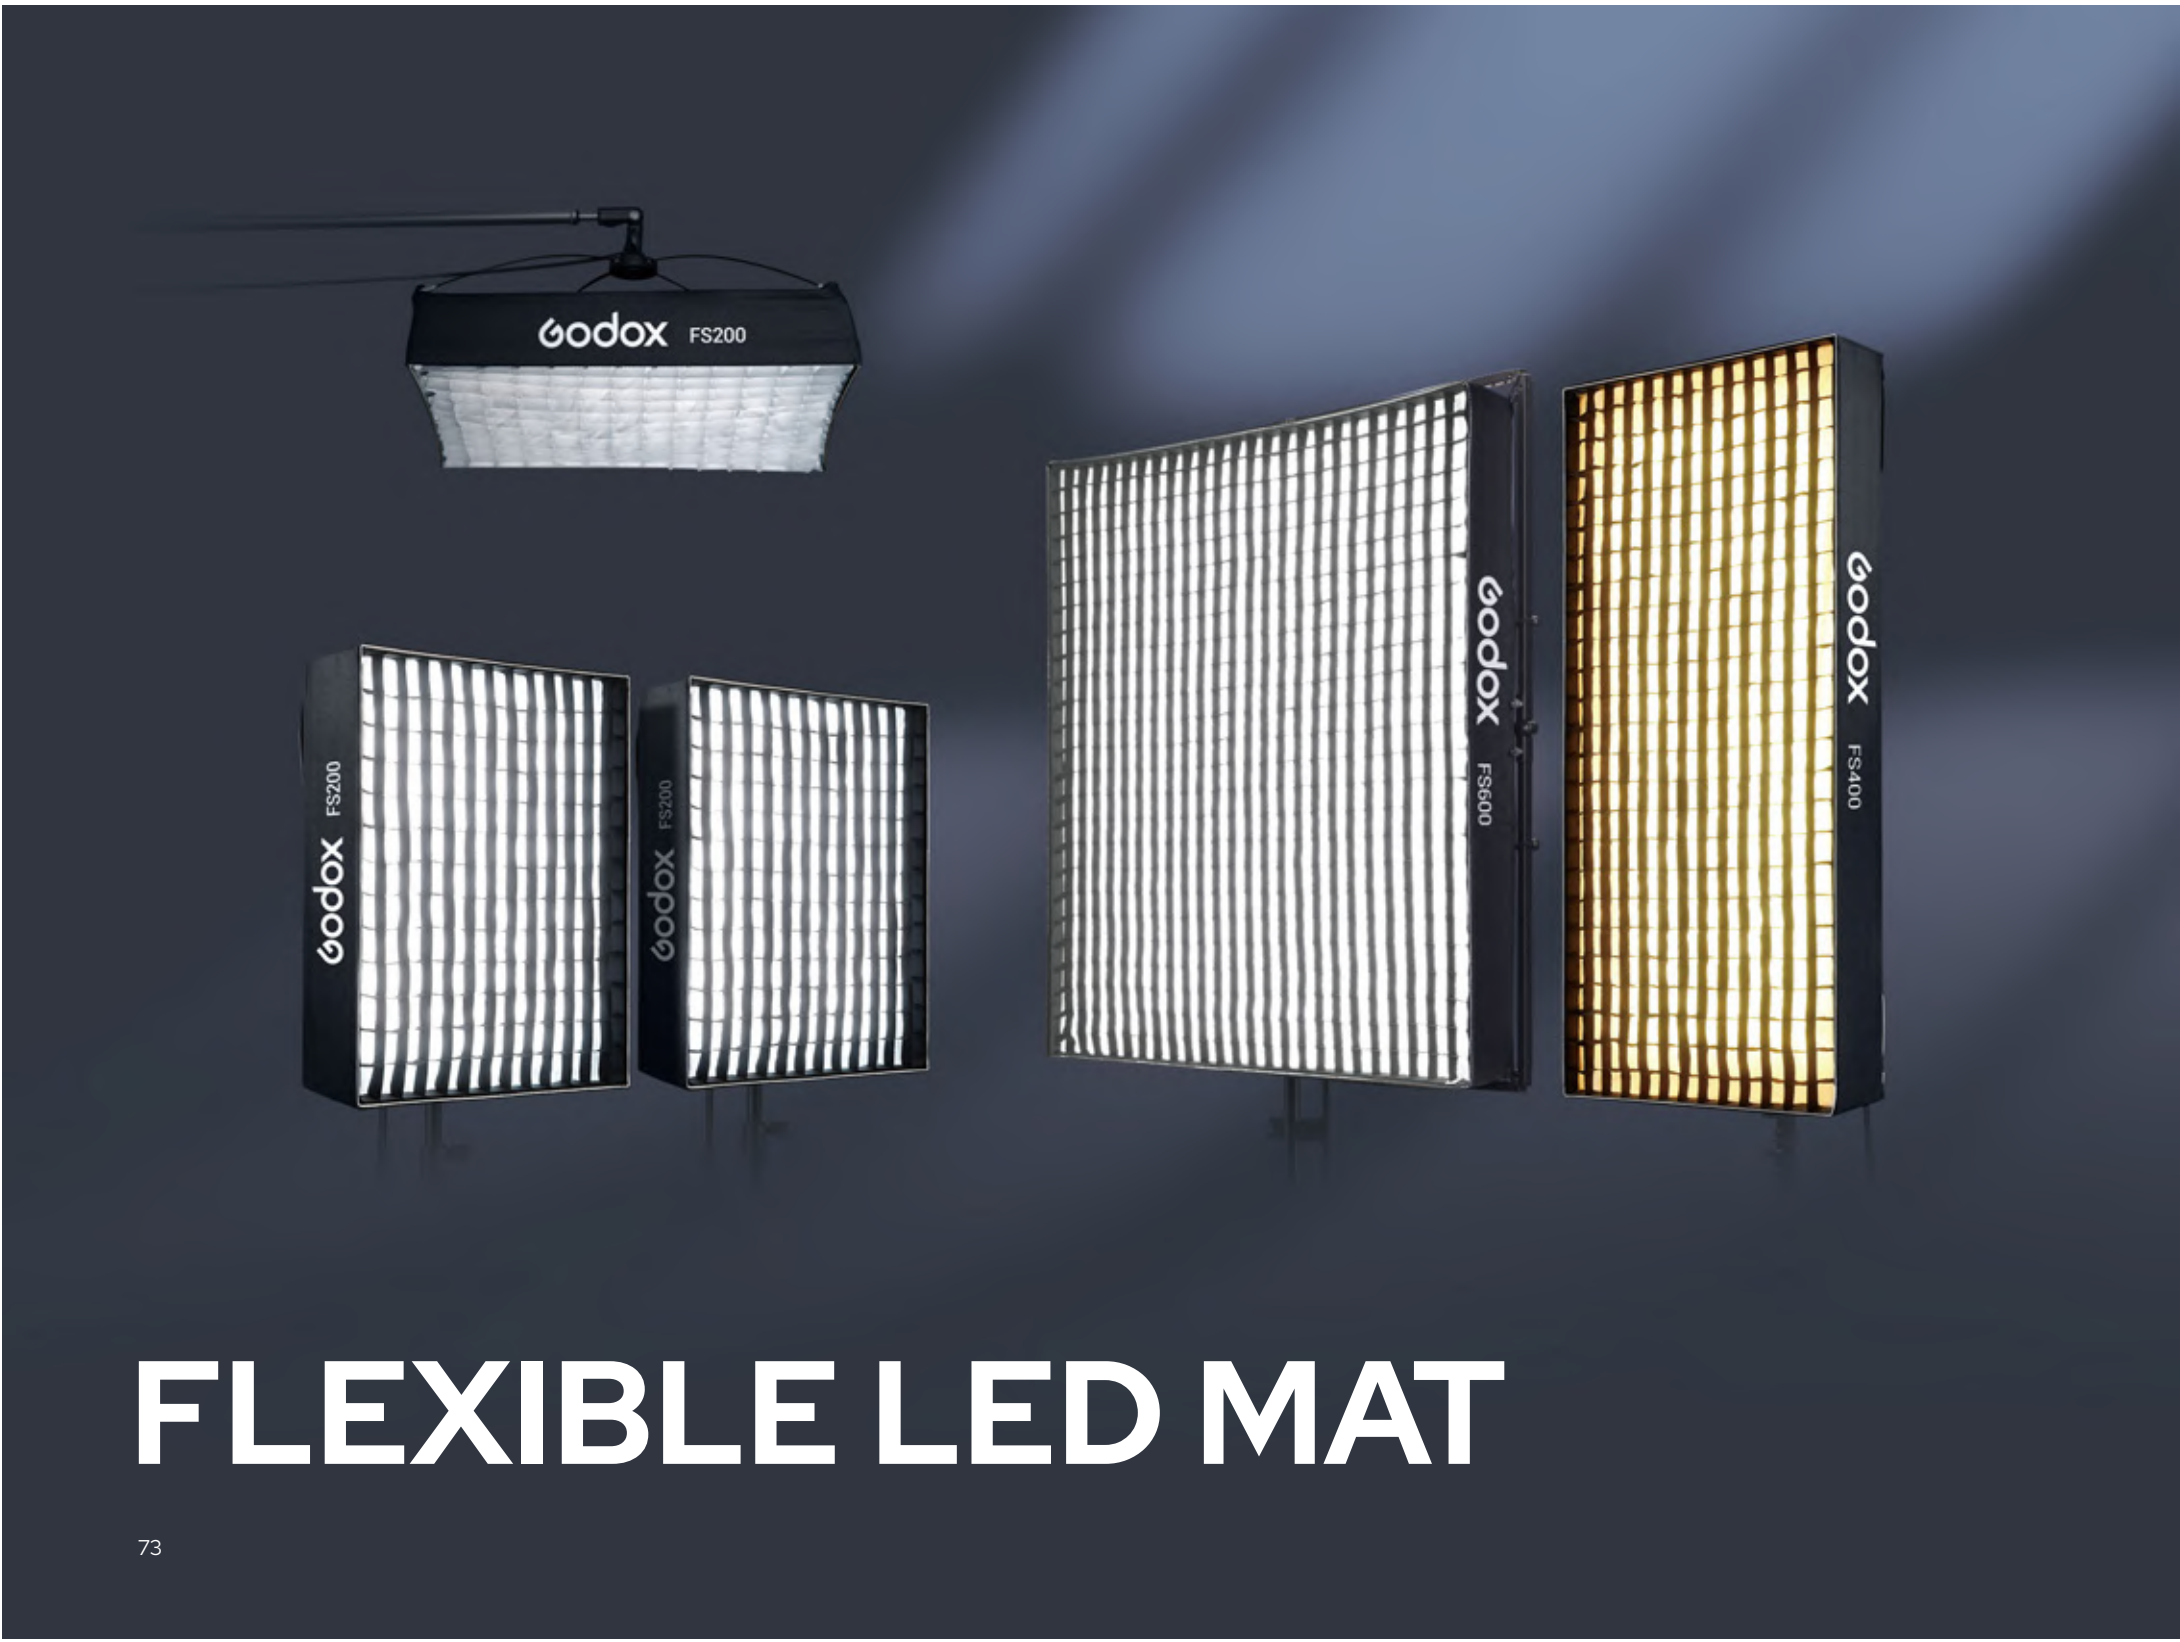


# FLEXIBLE LED MAT

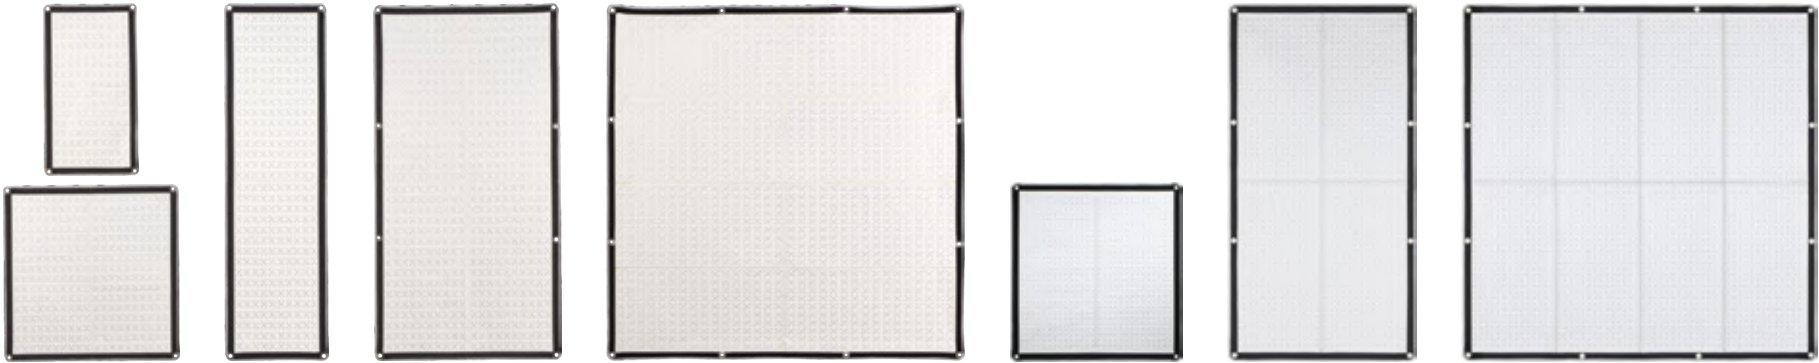

## SPECS

Model	F100R	F200R	F200SR	F400R	F800R	F200Bi	F400Bi	F600Bi
Luminance	4740Lux @1m(5600K)	8900Lux @1m(5600K)	7900Lux @1m(5600K)	14400Lux @1m(5600K)	24200Lux @1m(5600K)	1,130Lux @3m (5600K)	2,280Lux @3m (5600K)	3,240Lux @3m (5600K)
Color Version	Full-color	Full-color	Full-color	Full-color	Full-color	Bi-color	Bi-color	Bi-color
CCT	1800K-10000K	1800K-10000K	1800K-10000K	1800K-10000K	1800K-10000K	2700K-8500K	2700K-8500K	2700K-8500K
Max. Power	130W	250W	250W	460W	900W(Max.)	210W	410W	670W
Color Rendering	CRI≥96/TLCI≥98	CRI≥96/TLCI≥98	CRI≥96/TLCI≥98	CRI≥96/TLCI≥97	CRI≥96/TLCI≥97	CRI≥96/TLCI≥96	CRI≥96/TLCI≥96	CRI≥96/TLCI≥96
Controlling Methods	DMX/LumenRadio CRMX/ Bluetooth app Control	DMX/LumenRadio CRMX/ Bluetooth app Control	DMX/LumenRadio CRMX/ Bluetooth app Control	DMX/LumenRadio CRMX/ Bluetooth app Control	DMX/LumenRadio CRMX/ Bluetooth app Control	DMX/App/On-board/Remoter/ Bluetooth app Control	DMX/App/On-board/Remoter/ Bluetooth app Control	DMX/App/On-board/Remoter/ Bluetooth app Control
Power Supply	100V-240V~50/60Hz	100V-240V~50/60Hz	100V-240V~50/60Hz	100V-240V~50/60Hz	100V-240V~50/60Hz	AC/DC 48V/V-mount battery	AC/DC 48V/V-mount battery	AC/DC 48V/V-mount battery
G/M Adjust	-100%~100%	-100%~100%	-100%~100%	-100%~100%	-100%~100%			
Protection Grade of Light Body/Controller	IP54	IP54	IP54	IP54	IP54	IP65	IP65	IP65
Dimension≈	Bare Light Body: 344*636mm	Bare Light Body: 637*637mm	Bare Light Body: 344*1220mm	Bare Light Body: 637*1221mm	Bare Light Body: 1221*1221mm	650*631*29mm	1209*627*23mm	1210*1210*24mm
	Controller: 154*128*232mm	Controller: 154*128*232mm	Controller: 154*128*232mm	Controller: 208*161*322mm	Controller: 190*166*366mm	124*132*270mm	124*132*270mm	179*123*332mm
Netweight≈	Bare Light Body: 0.6kg	Bare Light Body: 1kg	Bare Light Body: 1. 05kg	Bare Light Body: 1. 8kg	Bare Light Body: 3kg	1.83kg	3.1kg	3.8kg
	Controller: 2.8kg	Controller: 2.8kg	Controller: 2.8kg	Controller: 5.8kg	Controller: 6.5kg	2.77kg	3.07kg	3.9kg



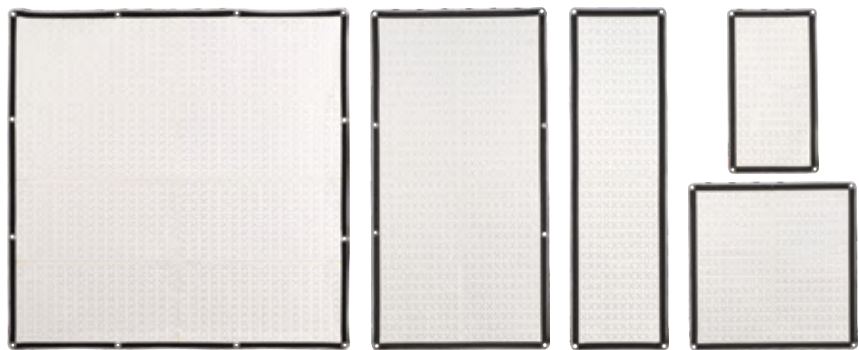

Bright full color



Lightweight & foldable



Five sizes



Detachable air softbox



CRMX control

## F100R/200R/200SR/400R/800R

- Full-Color Brightness for Every Scene
- Five Sizes: 1'x2'/2'x2'/1'x4'/2'x4'/4'x4'
- Light mats in 100W, 200W, 400W, 800W Options
- Compact and flexible for tight spaces
- High power in a slim design
- Light head IP54, control box IP54
- CCT range from 1800K to 10000K, adjustable G/M
- New air softbox available for each size
- Enhanced frame stability, high-quality softbox, QUICK installation
- CRI96+, TLCI 97+
- DMX512 Control/LumenRadio CRMX/Ethernet/Bluetooth app Control
- Power Options: AC,DC 48V, V-mount batteries



Full-Color Flexible LED Mat | F100R/200R/200SR/400R/800R



Full-Color Flexible LED Mat | F100R/200R/200SR/400R/800R



Space-Constrained Solution



Soft Light Film Set



Rainy Day Shooting



Full-Color Flexible LED Mat | F100R/200R/200SR/400R/800R




F100R K1

Light Body	×1	X Bracket	×1
DC Connection Cable	×1	Light Stand Mounting Adapter	×1
Softbox FS100	×1	Controller	×1
AC Power Cable	×1	Carrying Bag	×1



F200R K1

Light Body	×1	X Bracket	×1
DC Connection Cable	×1	Light Stand Mounting Adapter	×1
Softbox FS200	×1	Controller	×1
AC Power Cable	×1	Carrying Bag	×1

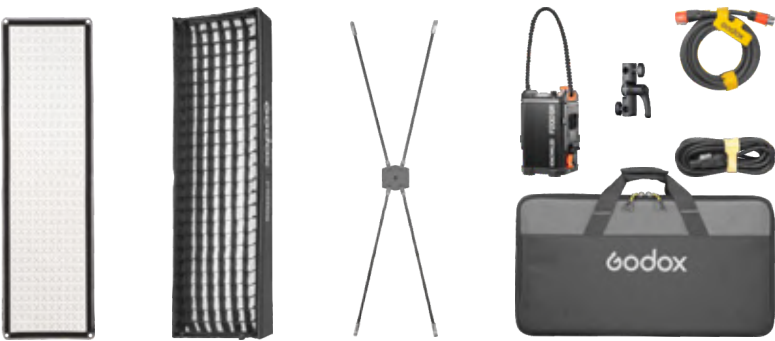

F200SR K1


Light Body	×1	X Bracket	×1
DC Connection Cable	×1	Light Stand Mounting Adapter	×1
Softbox FS200S	×1	Controller	×1
AC Power Cable	×1	Carrying Bag	×1



F400R K1

Light Body	×1	Light Stand Mounting Adapter	×1
DC Connection Cable	×1	Controller	×1
Softbox FS400	×1	Carrying Bag	×1
AC Power Cable	×1	Protective Cloth	×1
X Bracket	×1		


Full-Color Flexible LED Mat | F100R/200R/200SR/400R/800R

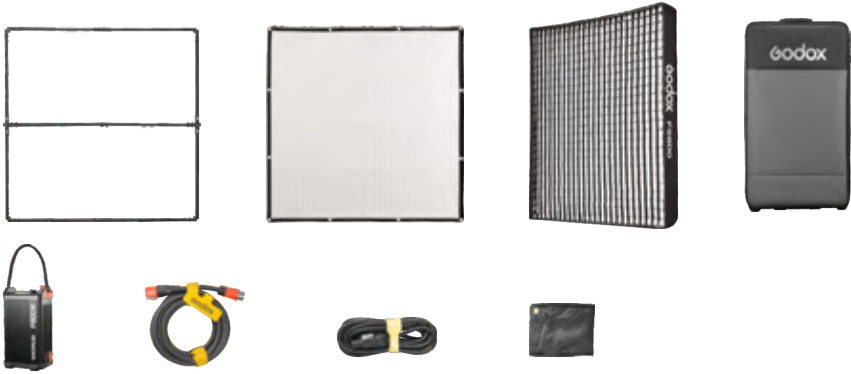

F800R K1

Light Body	×1	Metal Frame	×1
DC Connection Cable	×1	Protective Cloth	×1
Softbox FS800	×1	Controller	×1
AC Power Cable	×1	Carrying Case	×1

Optional Purchase

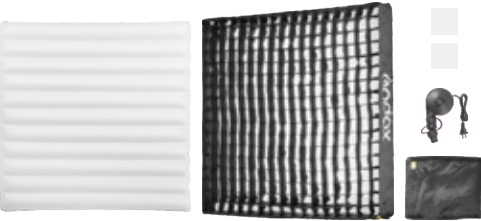

**Air Softbox Kit**  
Air Softbox body×1 Grid×1 Skirt×1 Air Pump×1 Repair Patch×2  
FA800 for F800R/FA400 for F400R  
FA200S for F200SR/FA200 for F200R  
FA100 for F100R



**AT200**  
Air Tube×1 Skirt×1 Grid×1 Air Pump×1  
Repair Patch×2 Fabric Handle×2  
Connecting Holder×1 Velcro Hook Fastener×1



**Pancake Lantern**  
FP600 for F800R  
FP400 for F400R  
FP200 for F200R



**Skirt for K1 Softbox Kit**  
SS-FS800 for FS800/SS-FS400 for FS400  
SS-FS200S for FS200S/SS-FS200 for FS200  
SS-FS100 for FS100



**5m DC Cable**  
F-DC5D for F200R/F200SR/F100R  
F-DC5E for F400R/F800R



**10m DC Cable**  
F-DC10E for F400R/F800R




**Controller Clamp PC01**



**Adjustable Support Bracket BP01**  
For F800R



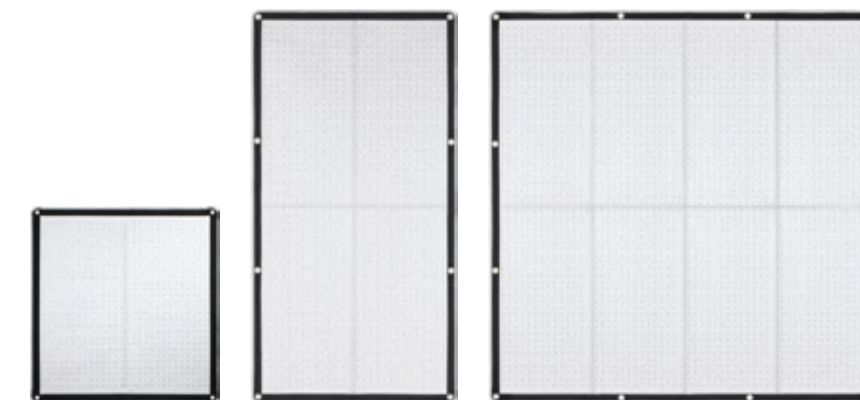

Foldable



Lightweight

IP65

Water-resistance



2700K-8500K

## F200Bi/F400Bi/F600Bi

- CCT: 2700K-8500K
- Slim and flexible design suitable for use in narrow or curved spaces
- LED mats in 200W, 400W, 600W options
- Consistent full power output across all color temperatures
- CRI 96+, TLCI 96+
- Linear/S-Curve/Logarithmic/Exponential dimming curve
- Light body with a foldable design and IP65 water resistance
- High-quality aluminum alloy frame construction
- Easy to fold and transport
- Controls: DMX, App control, 2.4GHz remote, on-board
- CRMX support with optional TimoLink receiver (Sold Separately)
- Power options: AC, DC 48V, and V-mount batteries





Flexible LED Mat | F200Bi/F400Bi/F600Bi



F200Bi

Light Body	×1	5m Power Cable	×1
Control Box	×1	Adapter Holder	×1
X Bracket	×1	Softbox with Grid FS200	×1
3m Connect Cable	×1	Carry Bag CB87	×1



F400Bi

Light Body	×1	5m Power Cable	×1
Control Box	×1	Adapter Holder	×1
X Bracket	×1	Softbox with Grid FS400	×1
3m Connect Cable	×1	Carry Bag CB87	×1




F600Bi

Light Body	×1	Softbox with Grid FS600	×1
Control Box	×1	Carry Bag CB88	×1
3m Connect Cable	×1	Detachable metal frame MB-F600x1	
5m Power Cable	×1		

## Optional Purchase



Pancake Lantern  
FP200 for F200Bi  
FP400 for F400Bi  
FP600 for F600Bi



Flag Frame  
FF200 for F200Bi



Remote Control  
RC-R9II or RC-A6II



5m DC Cable  
F-DC5A for F200Bi  
F-DC5B for F400Bi  
F-DC5C for F600Bi



Nano Clamp  
L SA-03&LSA-19



Wireless DMX Transmitters  
and Receivers  
TimoL ink TX/TimoL ink RX



Hanging use for close-up shot



Indoor on-location lighting




Narrow-space lighting





# TUBE LIGHTS

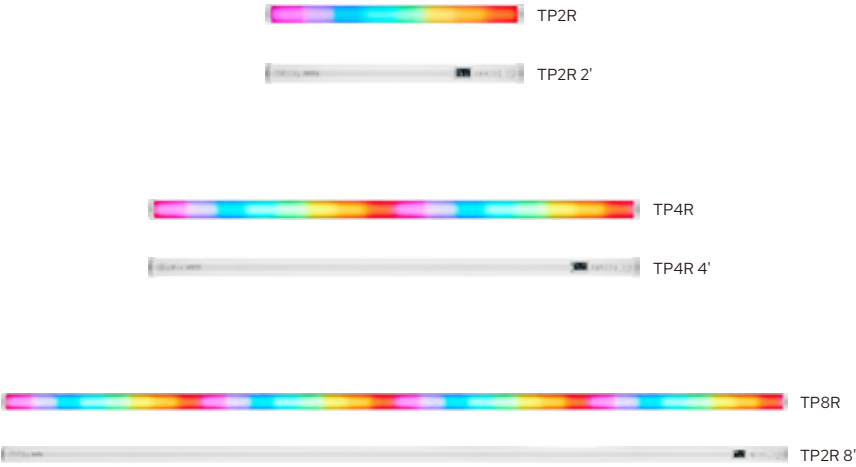

## SPECS

Model	TP2R	TP4R	TP8R
Luminance	565Lux @1m (5600K)	765Lux @1m (5600K)	994Lux @1m (5600K)
Color Version	RGBWW	RGBWW	RGBWW
CCT	2000K-10000K	2000K-10000K	2000K-10000K
Pixels	16	32	64
Max. Power	26W	47W	83W
Color Rendering	CRI≥96/TLCI≥97	CRI≥96/TLCI≥97	CRI≥96/TLCI≥97
Controls	CRMX/DMX/App/On-board/Remoter	CRMX/DMX/App/On-board/Remoter	CRMX/DMX/App/On-board/Remoter
Built-in Battery	Included	Included	Included
Power Supply	AC/built-in battery	AC/built-in battery	AC/built-in battery
Dimension	47*47*600mm	47*47*1200mm	47*47*2400mm
Weight	0.84kg	1.5kg	2.94kg





TP2R

TP2R 2'

TP4R

TP4R 4'

TP8R

TP2R 8'



High pixel density



For Mapping Use



Lumen Radio CRMX



180° Rotatable Screen



2000K-10000K

## TP2R/TP4R/TP8R

- High pixel density: 16(TP2R)/32(TP4R)/64(TP8R)
- Sizes: 2'(TP2R)/4'(TP4R)/8'(TP8R)
- CCT: 2000-10000K
- RGBWW capable
- CRI≥96, TLCI≥96
- Controls: DMX & CRMX, App control, 2.4GHz remote, on-board
- Selectable 8-bit & 16-bit modes
- 14 built-in FX effects
- 180° rotatable on-board screen for easy reading
- Excellent diffusion panel





RGBWW Pixel Tube Light | TP2R/TP4R/TP8R



Car scene lighting




Music video lighting



Pixel mapping

RGBWW Pixel Tube Light | TP2R/TP4R/TP8R

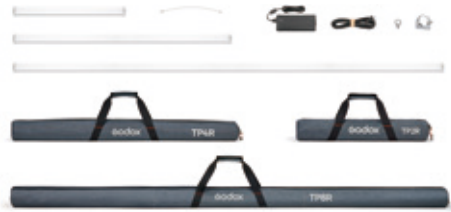


- TP2R**  
Four-light Kit for TP2R
- 2' Pixel Tube light ×1
  - One for Two Adapter ×1
  - Power Cord ×1
  - Clip ×1
  - Bolt ×1
  - Steel Rope ×1
  - Carry Case CB76 ×1



- TP2R-K4**  
Four-light Kit for TP2R
- 2' Pixel Tube light ×4
  - One for Two Adapter ×2
  - Power Cord ×2
  - Clip ×4
  - Bolt ×8
  - Steel Rope ×8
  - Carry Case CB76 ×1



- TP4R-K4**  
Four-Light Kit for TP4R
- 4' Pixel Tube light ×4
  - One for Two Adapter ×2
  - Power Cord ×2
  - Clip ×8
  - Bolt ×8
  - Steel Rope ×8
  - Carry Case CB77 ×1

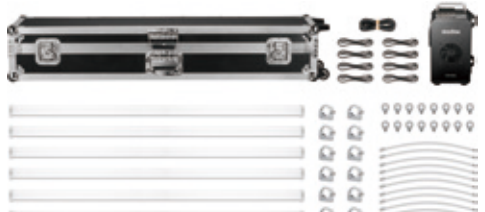

- TP8R-K8**  
Eight-light Kit for TP4R
- 4' Pixel Tube Light ×8
  - Power Box ×1
  - Power Cord ×1
  - Clip ×16
  - Double Male Straight DC Cord ×8
  - Bolt ×16
  - Steel Rope ×16
  - Carry Case CB79 ×1

### Optional Purchase



Two-light Bracket Kit  
TP-B2 (for TP2R/TP4R)



Four-light Bracket Kit  
TP-B4 (for TP2R/TP4R)



Eight-light Bracket Kit  
TP-B8 (for TP2R/TP4R)



Softbox TP-S2/TP-S4



Air Soft Tube  
TP-S2A/TP-S4A



Power Box  
TP-P600



Grid  
TP-G2



Grid  
TP-G4



Grid  
TP-G8



Floor Stand  
TP-FS60



Multi-tube Light  
Connector TP-M2



DMX Adapter  
Cable DMX-C1



TimoLink TX  
Wireless DMX Transmitter



One for Two Adapter  
TP-A2R/TP-A4R/TP-A8R



10m Power Cable  
AC10A



5m DC Cable  
TP-DC5




D-TAP to DC Male  
Connector Cable DT-C1





# AIR TUBE LIGHT

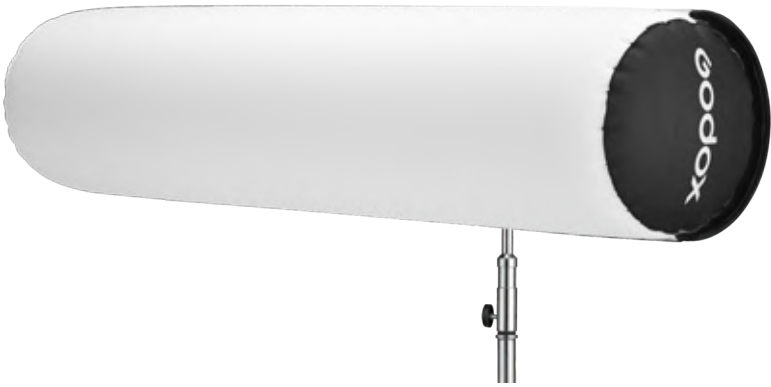

## SPECS

Model	AT200Bi
Power Supply	100V-240V~50/60Hz 2.1A
Max. Power	≈210W
CCT	2700-8500K
Brightness Range	0%-100%
Dimming Curves	linear, s-curve, exponential, logarithmic
FX Modes	11
CRI	Average≥96
TLCI	Average≥96
Waterproof Grade of Light Body	IP65
Controlling Methods	DMX 512 Control (support RDM protocol), 2.4GHz Wireless Control, Bluetooth APP Control
Bluetooth Controlling Distance	Max. 30m
2.4G Remote Control Distance	Max. 60m
Type-A USB Port	Firmware Upgrade/5V=1A Power Supply
Dimension	Light Body: 280mm*267mm*1226mm/11*11*48" (With air bag and in the inflated state, does not include the connection cable.) Controller: 124mm*132mm*270mm
Netweight≈	Light Body: 2.15kg (Including airbag)/Controller: 2.8kg





180° Light Emission



200W Output



Multiple Controls



2700K-8500K



Detachable Design

## AT200Bi

- CCT: 2700K-8500K
- LED mat with an inflatable softbox for soft, even lighting
- Handheld, suspended, or stand-mounted options
- Modular design for easy maintenance
- Multiple control options including DMX512, app control, and wireless remote
- Controls: DMX, App control, and wireless remote
- Maximum power of 210W
- High CRI and TLCI ratings above 96
- IP65 weather-resistant light body
- Sweeping 180° generous beam spread
- AC power and V-mount battery support
- Foldable, lightweight design
- 11 built-in FX lighting effects





SPECS

Model	C5R	C7R	C10R
Luminance	200Lux @1m (6500K)	101Lux @1m (5500K)	130Lux @1m (5500K)
Color Version	RGBWW	RGBWW	RGBWW
CCT	2500K-8500K	2000K-10000K	2000K-10000K
Max. Power	5W	7W	10W
Color Rendering	CRI≥96/TLCI≥96	CRI≥96/TLCI≥97	CRI≥96/TLCI≥97
Controls	On-board/App	On-board/App	On-board/App
Built-in Battery	Included	Included	Not included
Power Supply	5V/2A Type-C DC charging/ wireless charging/built-in battery	AC (lamp socket)/5V/ 2.5A Type-C DC charging/built-in battery	AC (lamp socket)/5V/ 3A Type-C DC charging
Dimension	106*68*18mm	73*73*136mm	73*73*136mm
Weight	169g	256g	236g





Lightweight



RGBWW



Magnetic stripe  
design



Built-in battery



Type-C  
wireless charging

## C5R

- Lightweight and portable
- CCT: 2500-8500K
- RGBWW capable
- CRI≥96, TLCI≥97
- Two independent dials for easy adjustment
- Magnetic back for easy attachment
- 39 FX effects for creative lighting
- Built-in 3000mAh lithium battery for 2-hours runtime at full output
- Wireless/Type-C charging
- Controls: Godox Light App, on-board
- Includes a collapsible diffuser
- Available in an 8-light charging kit



Constant power



RGBWW



2000-10000K



Built-in battery  
(C7R)

## C7R/C10R

- Constant power design ensures stable lighting
- CCT: 2000-10000K
- Magenta-green adjustment.
- RGBWW capable
- Built-in battery for C7R
- CRI≥96, TLCI≥97
- Quick reset of bluetooth connection via on-board buttons
- Precise control via Godox Light App
- Power supply: AC/DC
- Available in E26 and E27 base options for versatile compatibility
- C7R available in an 8-light charging kit





RGBWW Creative Light/Bulb | C5R/C7R/C10R



Practical lighting



Ambient lighting



Colorful atmosphere

RGBWW Creative Light/Bulb | C5R/C7R/C10R

## C5R



Light Body x1



Collapsible Diffuser x1



Carry Bag CB50 x1



Coldshoe Base x1



USB Type-c Cable x1

## C5R-C8 Eight-light Charging Case for C5R



Charging Case  
Charging Case Power Cord  
USB-C Cable  
D-TAP to DC Adapter Cable

x1  
x1  
x2  
x1

## C5R-K8 Eight-light Charging Case Kit for C5R



C5R  
Collapsible Diffuser  
Charging Case Power Cord  
Charging Case  
USB-C Cable  
D-TAP to DC Adapter Cable  
Cold Shoe Mount

x8  
x8  
x1  
x1  
x2  
x1  
x2

## C7R/C10R



Light Body x1



Storage Bag x1



Type-C Cable x1

## Optional Purchase (for C7R/C10R)



CR-B01  
Round Cup Bouncer



CR-LS  
Magnetic Lamp Socket



C7R Eight-light Charging Case  
E26 Socket: C7R-C8A/E27 Socket: C7R-C8B

## Eight-light Charging Case Kit for C7R

E26 Socket: C7R-K8A/E27 Socket: C7R-K8B



Light Body x8



CR-B01 Round Cup Bouncer x8



C7R Eight-light Charging Case x1  
E26 Socket: C7R-C8A/E27 Socket: C7R-C8B



Storage Bag for  
Round Cup Bouncer x2



1.5m Charging Case  
Power Cord x1



Type-C Cable x2

## Eight-light Kit for C10R

E26 Socket: C10R-K8A/E27 Socket: C10R-K8B



Light Body x8



CR-B01 Round Cup Bouncer x8



CB97 Carry Bag x1



Storage Bag for  
Round Cup Bouncer x2



1.5m Charging Case  
Power Cord x1




Type-C Cable x2





# CINE LIGHTING REFLECTOR



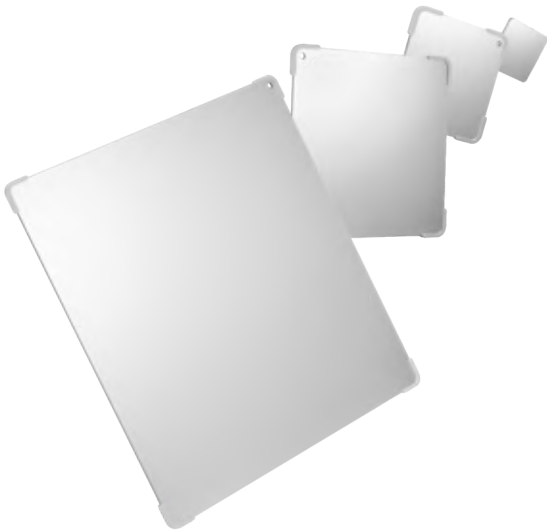

High Reflectance



Four Diffusion  
Types



Varied Sizes



Versatile  
Applications



Comprehensive  
Accessories

## LiteFlow 7/15/25/50/100

- Exceptional reflectance with a mere 3% power loss
- A variety of diffused lighting effects: D1/D2/D3/D4
- Five size options: 7×7/15×15/25×25/50×50/100×100 cm
- Sleek rail structure with a guide slot design, ensuring seamless installation
- Leveraging the square inverse law to extend the light path
- Effortless adjustments for convenient control
- Directly utilizing natural sunlight to balance lighting contrast, even without artificial sources
- Redirecting a single light source multiple times, reducing the need for additional fixtures and light- shaping tools
- Mimicking natural light decay, guaranteeing even lighting across the illuminated area
- Varying sizes grant you precise control over the illuminated area
- Coming with a comprehensive range of accessories





Narrow space lighting



Utilizing sunlight outdoors



With high-output fixtures in low positions

## Cine Lighting Reflector | LiteFlow 7/15/25/50/100

### LiteFlow 7



LiteFlow 7D1×1



LiteFlow 7D2×1



LiteFlow 7D3×1



LiteFlow 7D4×1



Soft Case SC13×1

### LiteFlow 15



LiteFlow 15D1×1



LiteFlow 15D2×1



LiteFlow 15D3×1



LiteFlow 15D4×1



Soft Case SC14×1

### LiteFlow 25



LiteFlow 25D1×1



LiteFlow 25D2×1



LiteFlow 25D3×1



LiteFlow 25D4×1



Soft Case SC15×1

### LiteFlow 50



LiteFlow 50D1×1



LiteFlow 50D2×1



LiteFlow 50D3×1



LiteFlow 50D4×1



Soft Case SC16×1

### LiteFlow 100



LiteFlow 100D1&D3×1 Yoke×1



LiteFlow 100D2&D4×1 Yoke×1

### LiteFlow 100 K1



LiteFlow 100D1&D3×1 Yoke×1




LiteFlow 100D2&D4×1 Yoke×1



Flight Case FC04×1




LiteFlow K1/K2

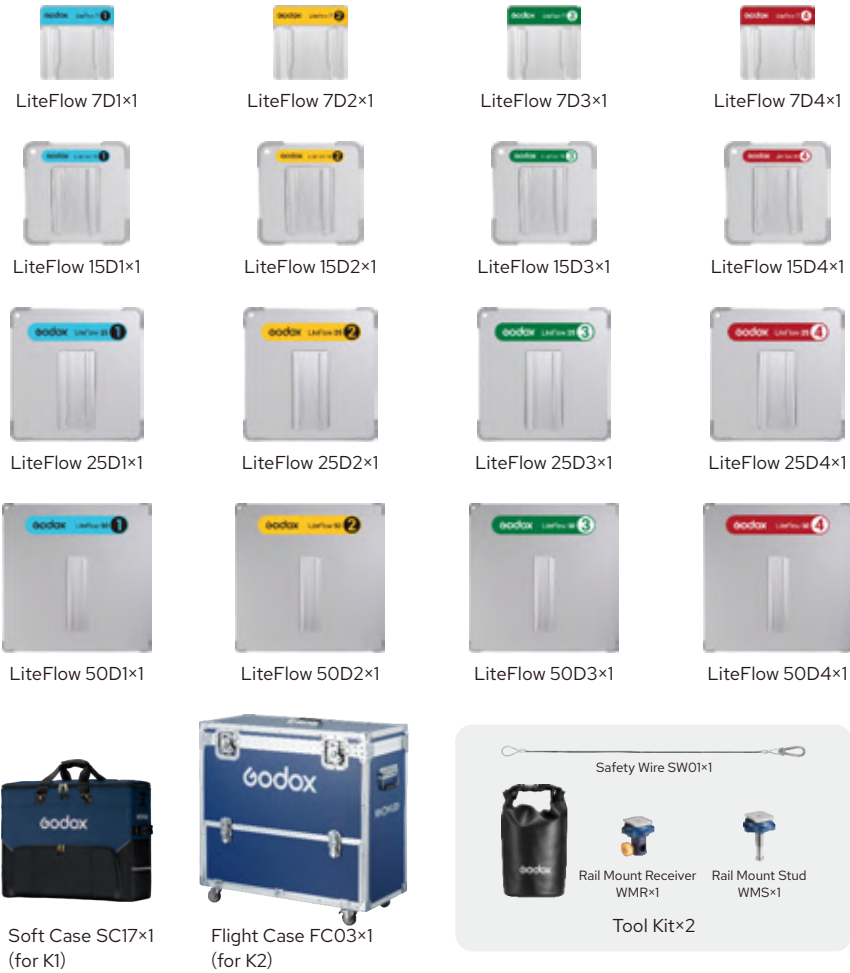

Optional Purchase




Rail Mount



Gag



Rod Set

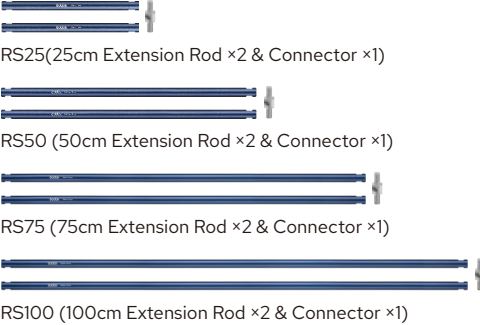

Multi-Adapter



Ball-Joint Arm



Flexible Arm (Important Note: Maximum load 1kg, restricted to use with LiteFlow 7/15/25.)




Multi-Reflector Array Grip Kit GK7



Multi-Reflector Array Grip Kit GK25



Multi-Reflector Array Grip Kit GK50

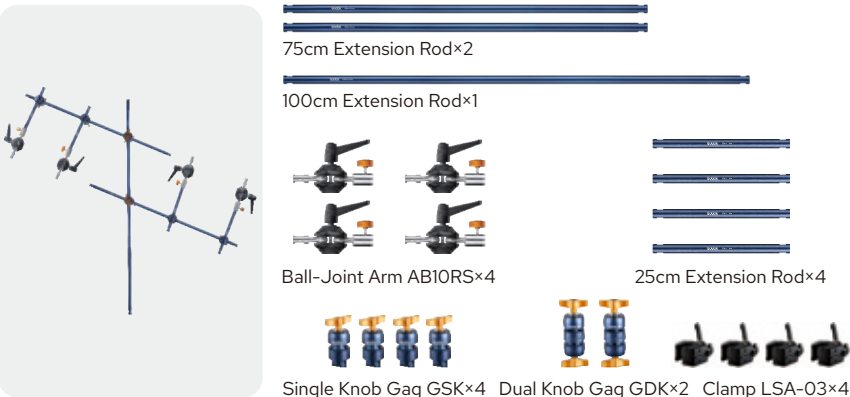

Cleaning Kit CK01



Safety Wire





# CONTROL SYSTEM

## KNOWLED APP


- **Professional Lighting Control App:** Transform your tablet into a powerful DMX lighting console.
- **Universal Compatibility:** Manage lights of any brand with a universal DMX protocol.
- **Practical Lighting Layout Interface:** Seamlessly sync your on-set lights with a virtual grid for exact control.
- **Stability Across Connections:** Reliable wireless and wired connection options for uninterrupted control.
- **Customize Your Library:** Create a local DMX light fixture library tailored to your needs.
- **Intuitive and Clean Interface:** Navigate and control with ease, streamlining your lighting setup process.
- **Fader Mode:** Simulate a physical console's familiar experience with virtual sliders.
- **Control at Your Fingertips:** Make changes to lighting parameters through a graphic interface.
- **Lightweight Mobility:** Control all your lighting from your Android tablet or iPad – no heavy hardware needed.
- **Connectivity Your Way:** Choose between Bluetooth-CRMX and Ethernet Art-Net for versatile setup options.



Godox KNOWLED APP



Stable connection with lights of any brand

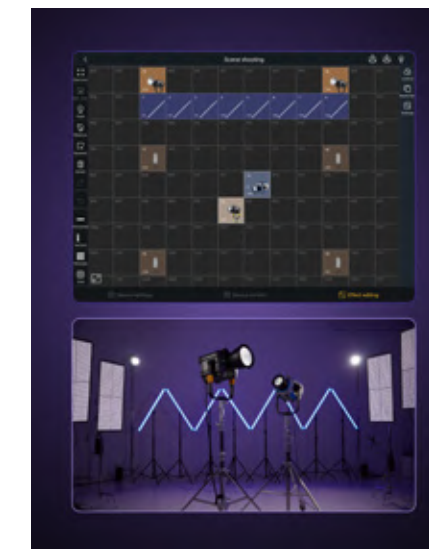

Position fixtures on the grid to match the setup



Wireless Connection - Bluetooth to CRMX



Wired Connection - Ethernet Art-Net





# ACCESSORY





5° Beam Angle



Parallel Beam with  
Slow Decay



Punchy Lighting



G-Mount  
Compatibility




Incredible Throw  
and Illuminance

## BeamLight Max90

- 5° Beam Angle
- Cinematic-grade parallel beam lighting with slow decay
- Incredible throw and illuminance comparable to 12K HMIs
- Punchy lighting
- An innovation parallel lighting solution with LiteFlow
- G-Mount Compatibility



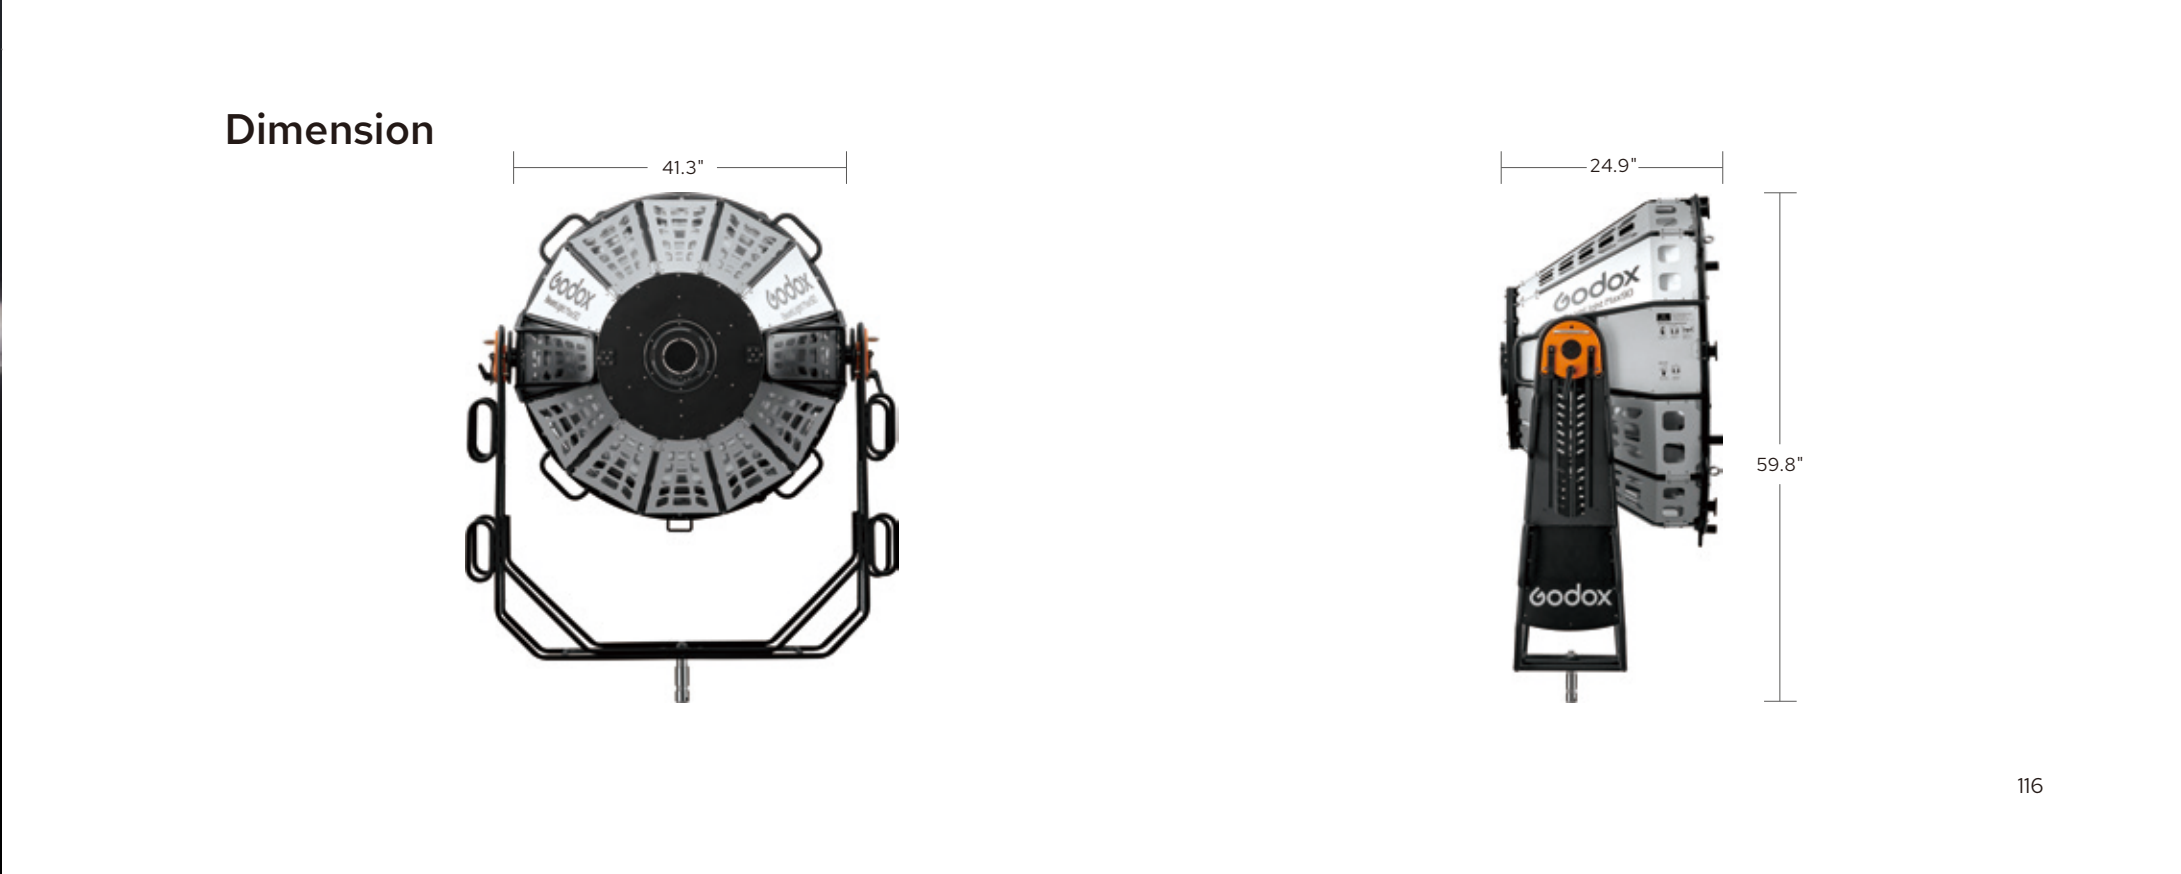



BeamLight B60/Max60



BeamLight B60/Max60



9.8 kg



## BeamLight B60/Max60

- 5° Narrow Beam
- Parallel Beam System
- Compatible with KNOWLED and G-mount lights
- Easy setup, only 10kg
- Protective housing for long-term use





B60

B60	×1	Support rods	×1
Spill Control Fabric	×1	Flight case	×4

Max60

Max60	×1	Flight case	×1
Spill Control Fabric	×1	Reinforced Brackets	×2
Supportrods	×4	(for MG1200Bi, MG1200R)	

Dimension



Godox Cinematic Grade Parallel Beam Lighting System



G-Mount Projection Attachment | GP19K/26K/36K



GP19K/26K/36K


- Evenly intensifying the illumination by times
- Project a crisp and clear beam without aberration
- Easily realizing versatile lighting effects with various accessories
- The rotatable handle allows more smooth and precise control
- Interchangeable lenses in 19°, 26°, 36°
- Efficient cooling system powered through G-Mount

Tech Specs

Model	Dimension	Weight
Projection attachment	418*647*727mm/16.5*25.5*28.6"(including lens)	≈11.6kg(excluding lens)
Lens 19°	281*235*289mm/11.1*9.3*11.4"	≈9.94kg
Lens 26°	281*235*289mm/11.1*9.3*11.4"	≈8.41kg
Lens 36°	281*234*287mm/11.1*9.2*11.3"	≈8.23kg



GP19K/26K/36K Projector	×1
Gobo Holder	×1
Gobo Set	×1
Portable Case	×1
Lens	×1

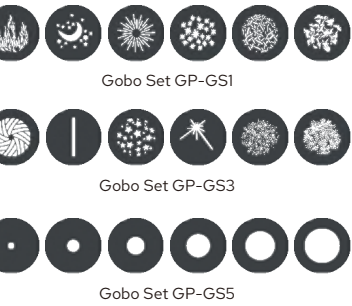

Flat Bowens Mount Projection Attachment | BP-19K/26K/36K



BP-19K/26K/36K

- Works with high-power flat Bowens-mount lights (such as M1000R, M600R, and M600Bi Pro)
- Built-in fan powered directly by the light for active cooling
- Compact and lightweight for easy one-person setup
- 360° rotatable barrel
- Precision optics for sharp, even beams and accurate color
- Three interchangeable lenses: 19°, 26°, 36°

Tech Specs

Model	Dimension	Weight
Projection attachment(excluding lens)	11.93"8.94"8.15"/303*227*207mm	5.4kg
Lens 19°	5.31"8.62"5.39"/135*219*137mm	1.9kg
Lens 26°	5.31"8.62"5.39"/135*219*137mm	1.7kg
Lens 36°	5.31"8.62"5.39"/135*219*137mm	2kg



Projection	×1
Gobo Holder(VSA-CF)	×1
U-type Bracket Set	×1
Storage Bag	×1
Gobo Set	×1
Signal Wire	×1
Projection Lens19°(BP-Lens19)	×1







VSA-19K /26K /36K

- Evenly intensify the illumination
- Project a crisp and clear beam without aberration
- Internal shutter blades for precise beam cutting
- With Gobos to create various backgrounds
- Three interchangeable lenses 19°, 26°, and 36°

Tech Specs

Model	Dimension	Weight
Projection attachment(excluding lens)	516*241*196mm/20.3*9.5*7.7"	3.42kg
Lens 19°	135*219*137mm/5.3*8.6*5.4"	1.94kg
Lens 26°	135*219*137mm/5.3*8.6*5.4"	1.75kg
Lens 36°	135*219*137mm/5.3*8.6*5.4"	1.92kg



- |                         |    |
|-------------------------|----|
| Spot Light Mount        | ×1 |
| 19°Lens/26°Lens/36°Lens | ×1 |
| Gobo Holder             | ×1 |
| Gobo                    | ×1 |
| Gel Frame               | ×1 |
| Portable Bag            | ×1 |





DL5 Parallel Booster



DL5 Parallel Booster



## DL5 Parallel Booster

- Specifically Designed to Enhance the Performance of the S60Bi/D
- 5° narrow beam
- Seamless compatibility with daylight, bi-color, and full-color lights
- Premium Glass Lens Design
- Minimized Stray Light
- Ideal for Precise Light Shaping
- Enhanced Efficiency with LiteFlow System



DL5 Parallel Booster



DL5 Parallel Booster



Honeycomb and Light Shield Ring for Precision Lighting



Enhanced Efficiency with LiteFlow System






GF14/FLS8/FLS10

FLS8+LB-01

FLS8 is compatible with the majority of Godox Bowens Mount LED lights.

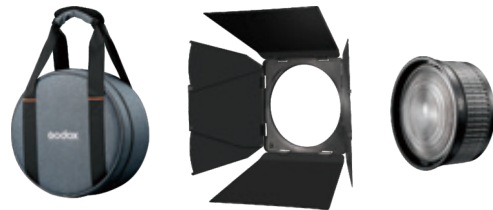


FLS10+LB-02

FLS10 is compatible with all Godox Bowens Mount LED lights.



GF14+GF14B

GF14 is compatible with Godox G-Mount LED lights, such as MG1200Bi.

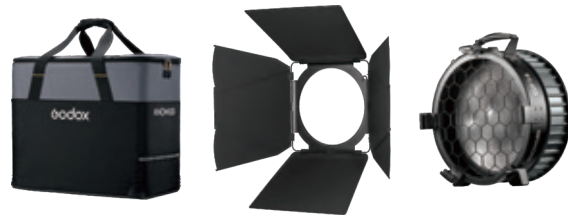

Tech Specs


Mode	FLS8	FLS10	GF14
Adjustable Beam Angle	10°~40°	10°~35°	15°~45°
Working Temperature	-10°C~40°C	-10°C~40°C	-10°C~40°C
Dimension	246*246*121mm	295*295*135mm	471*426*235mm
Weight	2kg	3kg	9.68kg

CS-50D/65D/85D


- Extremely fast setup
- Stunning, soft, omni-directional light
- Bowens Mount for compatibility
- Optional skirts for beam spread control





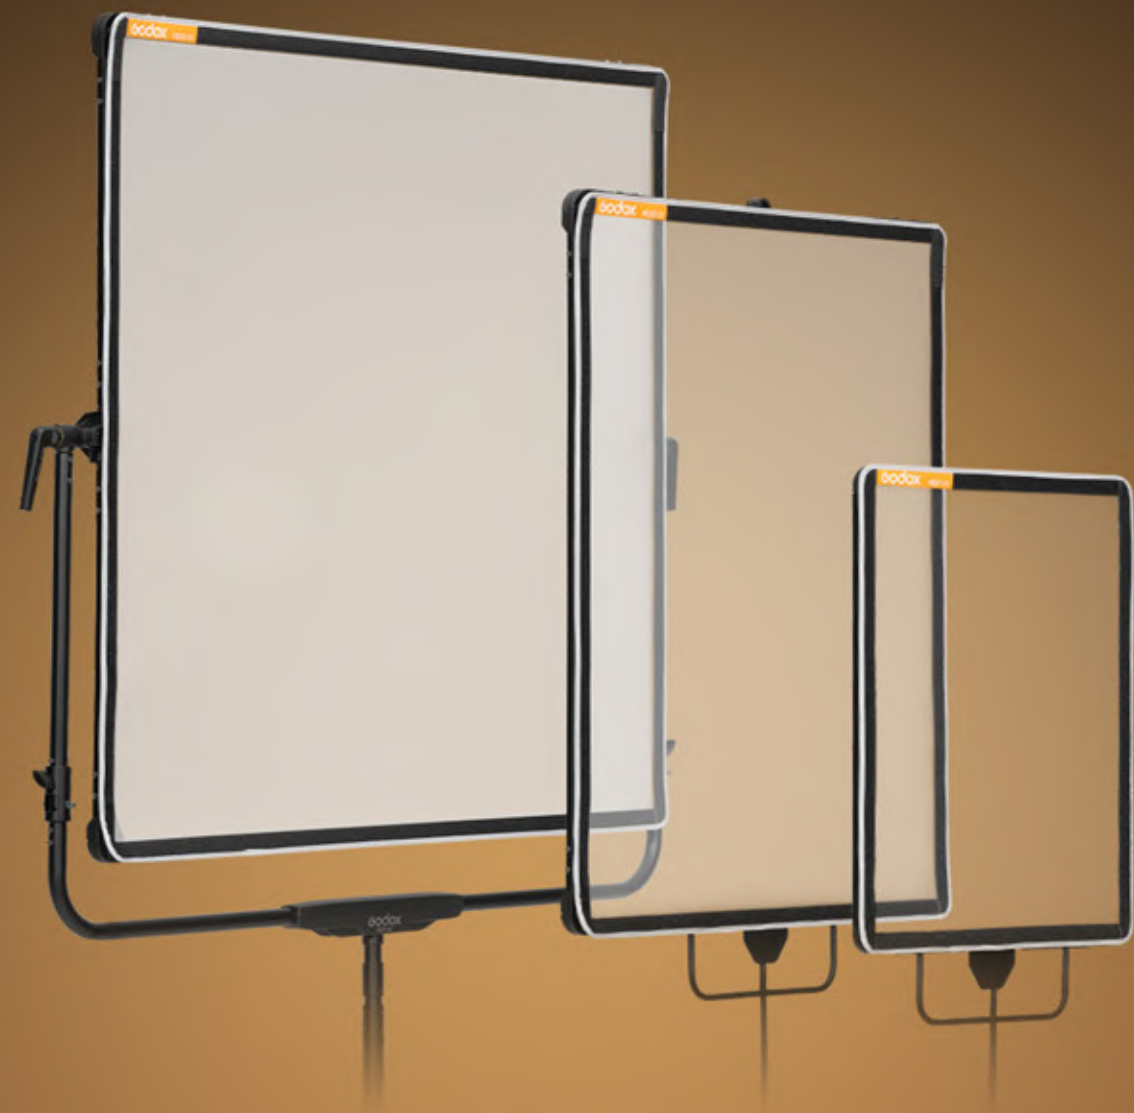

\*This product is available for sale only in Asia, Europe, Africa, Oceania, and South America.

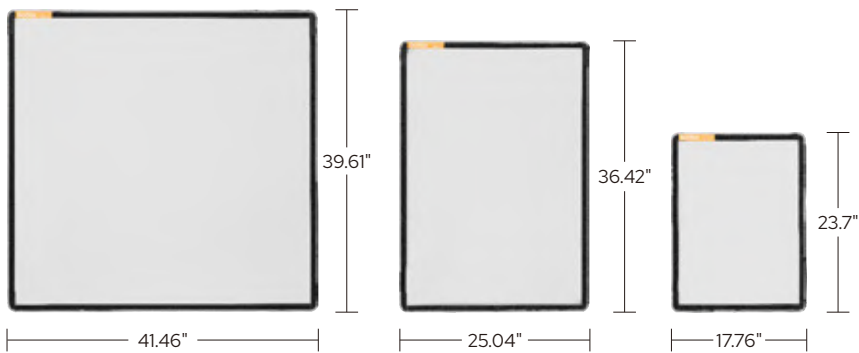

## AD21/AD32/AD33

- Motorized diffusion adjustment, hard-to-soft light in seconds
- Two control mode: 0-100% or -0.1 to -2.0 EV
- Power via USB-C, V-mount, or NPF
- Up to 20h runtime (100Wh battery)
- Flicker-free up to 300fps
- Foldable frame for easy setup
- Removable, IP54-rated diffusion panel
- Control via DMX, CRMX, App, or controller
- Lead/Follow mode for multi-panel sync
- Three sizes available



Adjustable Diffusion | AD21/AD32/AD33



Adjustable Diffusion | AD21/AD32/AD33



Level Mode: 0-100%    Light Reduction Mode: -0.1 to -2.0 EV



Easy Storage: Collapsible Frame



Removable, Velcro-Attached Diffusion Panel

Two Controller Options



AD00-01



AD00-02

Function/Model	AD00-01	AD00-02
V-Mount Battery Power	✓	
NPF Battery Power		✓
USB-C Power	✓	✓
CRMX	✓	
DMX	✓	✓
Bluetooth	✓	✓
Level Mode(0-100%)	✓	✓
Light Reduction Mode(-0.1 to -2.0 EV)	✓	✓
Speed Adjustment(1-4)	✓	✓
Model Selection	✓	✓
Frequency Adjustment	✓	✓
Lead/Follow Mode	✓	✓



Adjustable Diffusion | AD21/AD32/AD33




AD21 K2

Adjustable Diffusion AD21-01	×1	USB-C Data Cable	×1
Bracket AD21-02	×1	Storage Bag	×1
Controller AD00-01	×1	D-TAP to USB-C Adapter Cable	×1
AC Signal Control Cable	×1		



AD32 K2

Adjustable Diffusion AD32-01	×1	Tube	×1
Bracket AD32-02	×1	D-TAP to USB-C Adapter Cable	×1
Reel	×1	USB-C Data Cable	×1
AC Signal Control Cable	×1	Storage Bag	×1
Controller AD00-01	×1		

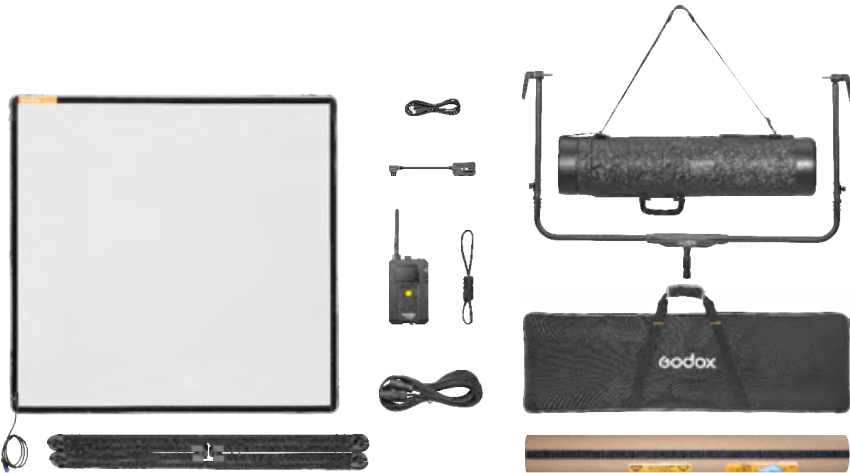

AD33 K2

Adjustable Diffusion AD33-01	×1	Tube	×1
Bracket AD33-02	×1	D-TAP to USB-C Adapter Cable	×1
Reel	×1	USB-C Data Cable	×1
AC Signal Control Cable	×1	Storage Bag	×1
Controller AD00-01	×1		

Adjustable Diffusion | AD21/AD32/AD33



AD21 K3

Adjustable Diffusion AD21-01	×1	AC Signal Control Cable	×1
Bracket AD21-02	×1	Storage Bag	×1
Controller AD00-02	×1		



AD32 K3

Adjustable Diffusion AD32-01	×1	Controller AD00-02	×1
Bracket AD32-02	×1	Tube	×1
Reel	×1	Storage Bag	×1
AC Signal Control Cable	×1		



AD33 K3

Adjustable Diffusion AD33-01	×1	Controller AD00-02	×1
Bracket AD33-02	×1	Tube	×1
Reel	×1	Storage Bag	×1
AC Signal Control Cable	×1		






## SF6090/SF4560 Kit

- Two versions to meet various size needs.
- Easy to store and transport with the carry case.
- Compact and foldable, making setup and usage easy.
- The black nets and one-stop silk can be used to adjust the contrast.
- The black solid fabric can be used to block unwanted illumination or create shadows.
- The two-stop silk can be used to diffuse and soften the light.
- The dots and fingers in black net and solid fabrics allow for shaping light on smaller objects or areas. Ideal for tabletop shooting or situations where larger fabrics are inconvenient.
- The open-edge design provides a softer cut of light and prevents hard transitions due to the edge.
- By finely adjusting the angle of the screen in front of the light, it allows for very changeable light and dark contrast, creating the desired transition.



Bowens Mount Quick Release Parabolic Softbox | QR-P70/P90/P120

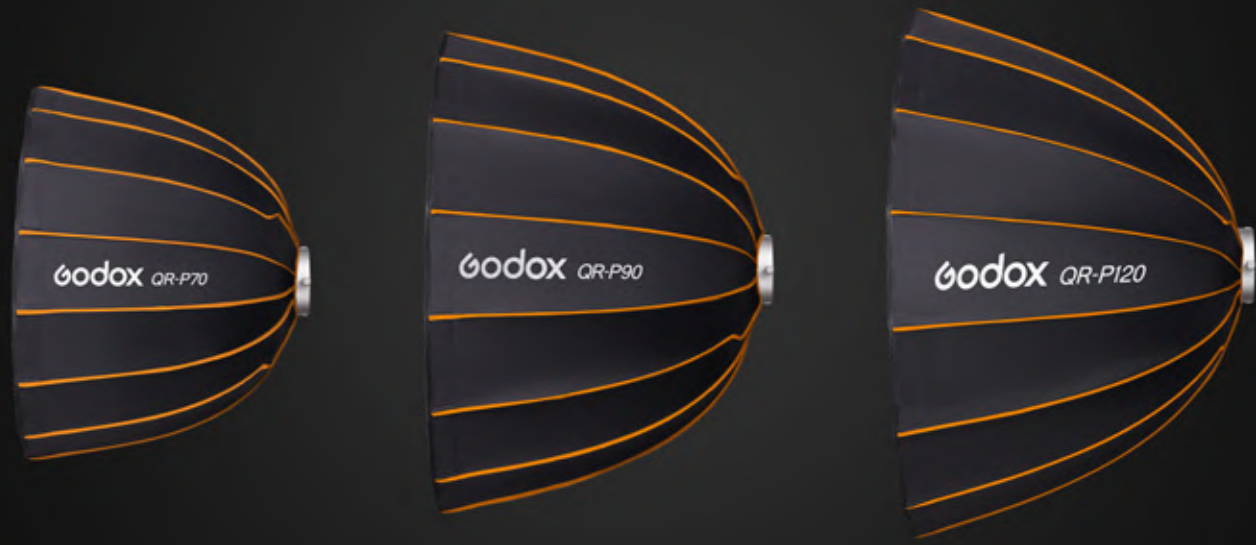

QR-P70/P90/P120

- Reflective silver interior to render a punchy high contrast
- Removable inner and front fabric diffusers
- Impressive quick release system for rapid setup and breakdown
- Reliable light quality and various creative expressions
- Bowens mount strobes and continuous light compatible



Effortless Setup



Quick Breakdown

Bowens Mount | Softbox



Square Softbox



Rectangular Softbox



Strip Softbox



Octagon Softbox



Square Softbox with Grid



Rectangular Softbox with Grid



Strip Softbox with Grid



Octagon Softbox with Grid

SPECS

	Square Softbox	Rectangular Softbox	Strip Softbox	Octagon Softbox
Model	SB-BW-6060/9090	SB-BW-6090/70100/80120	SB-FW-50130/35160	SB-FW-95/120/140
Size	60x60cm(23.6"x23.6")	60x90cm(23.6"x35.4")/70x100cm(27.6"x39.4")	50x130cm(23.6"x51.2")	φ95cm(37.4")/φ120cm(47.2")
	90x90cm(35.4"x35.4")	80x120cm(31.5"x47.2")	35x160cm(13.8"x 63.0")	φ140cm(55.1")



Lighting Stands & Mountings

SA5015

Heady Duty Steel Roller Stand

-   
168cm
-   
92cm
-   
10.4kg
-   
40kg



SA5045

Heady Duty Steel Roller Stand

-   
450cm
-   
146cm
-   
16.2kg
-   
40kg



240CS

C-Stand with Arm (Silver)

-   
95cm
-   
130cm
-   
237cm
-   
158cm
-   
6kg
-   
10kg
-   
25mm
-   
35/30/25mm



270CS

C-Stand with Arm (Silver)

-   
95cm
-   
140cm
-   
270cm
-   
168cm
-   
6.3kg
-   
10kg
-   
25mm
-   
35/30/25mm

