



## Safety Instructions and Attentions

**First of all, as the most basic principle: This product is a professional lighting set equipment and should be used by professional lighting engineers or under the guidance of professionals. Basic safety attentions must always be followed during use, as follows:**

- Before use, please read and understand these instructions and attentions. Professional lighting is prohibited for children. When children are near, parents or
- accompanying persons must supervise closely to prevent children from personal injury due to collision with lamps or private use of lamps.
- This lighting product is not ordinary lighting product and cannot be used for general lighting. Anyone who has suffered eye damage or has sensitive eyes should avoid using this product.
- When the lamp is on, it must be used with care. Do not touch high-temperature parts, such as LED lamp beads, to avoid burns.
- When the lamp is on, it is forbidden to look directly at the lamp beads under any circumstances. Strong light should be used under the guidance of professional lighting engineers. Avoid prolonged exposure to strong light under any circumstances. If eye discomfort, please turn off the lamp in time, suspend use, and see a doctor immediately.
- If the lamp bead is damaged or deformed by heat, stop using this equipment, and contact the manufacturer, service agent or qualified maintenance personnel to replace the lamp bead in time to avoid accidents.
- This product is only suitable for use in -10°C to 40°C operating environment and normal humidity environment.
- Do not use damaged equipment or accessories, and wait for professional maintenance personnel to check and repair to confirm being normal before use. During using, if the casing of this product is broken due to being dropped, squeezed
- or subjected to strong impact, please do not use it, so as to avoid electric shock injury due to contact with internal electronic components.
- If an extension cord is required, please use an extension cord with a current rating greater than or equal to that of the equipment. If an extension cord is rated less than the equipment, overheating may result.
- Some products have long power cords, please place the power cords properly and keep them in a safe place. Avoid contacting the power cord with overheating surfaces, avoid improper placement that could cause pulling damage, or trip on-site personnel.

7

## Illuminance Data


CCT	Testing Condition	Unit	0.5m	1m	2m
2800K	Bare Light	lux	7087	1800	451
		fc	659	168	42
	With Diffuser	lux	2295	562	134
		fc	214	52	13
3200K	Bare Light	lux	7411	1900	464
		fc	688	177	43
	With Diffuser	lux	2408	588	140
		fc	223	55	13
4300K	Bare Light	lux	7868	2000	493
		fc	730	186	46
	With Diffuser	lux	2512	613	145
		fc	233	57	14
4800K	Bare Light	lux	8025	2050	502
		fc	745	190	47
	With Diffuser	lux	2536	625	149
		fc	235	58	14
5600K	Bare Light	lux	8610	2200	540
		fc	800	203	50
	With Diffuser	lux	2700	663	157
		fc	251	62	15
6500K	Bare Light	lux	8805	2250	550
		fc	817	209	51
	With Diffuser	lux	2740	672	158
		fc	255	63	15

**Note:** All the data are average values instead of absolute values.All the above tests are based on the condition of 100% brightness.

7

Please use the certified power cord from the original manufacturer. If the product is damaged by using a non-certified power cord, it will not be repaired by our factory.

- Be sure to unplug equipment from the power outlet before cleaning and repairing. When not in use, do not pull the power cord to unplug the equipment. For normal power-off, please hold both ends of the plug of the equipment with your hands and pull the plug out of power outlet. This equipment needs to be connected to a grounded outlet.
- This equipment is not waterproof, please keep it dry and do not immerse it in water or other liquids.The equipment should be installed in a dry and ventilated place, and avoid using it in rainy, humid, dusty or overheated environments. Do not place any objects on the lamp or let liquid flow into the lamp to avoid accidents.
- Do not disassemble the product without permission. If the product fails, it must be checked and repaired by authorized maintenance personnel.
- Before storing, make sure that the equipment has cooled down completely. For storage, unplug the power cord from the equipment. The equipment should be placed in the carrying case or in a ventilated dry place.
- Do not place equipment near flammable and volatile solvents such as alcohol and gasoline.
- Do not use accessories that are not recommended by our factory to avoid fire, electric shock or personal injury.
- Be sure to clean the lamp bead glass frequently and keep it clean, as mosquito carcasses or dark organic stains may cause the glass to burst. When cleaning, do not wipe it with a damp cloth, please use a dry cloth or a soft cloth to wipe the dirt of the equipment.
- This product complies with ROHS, CE and FCC certification, please refer to the relevant national standards for use and operation.
- The safety instructions are formulated according to the strict testing of the factory, and the design and specifications of the equipment are subject to change without prior notice. For latest product information, please check the GODOX website and view latest electronic instruction.
- One-year warranty period, accessories such as consumable batteries, adapters, power cords, etc. are not covered by this warranty.
- If it is found that the equipment is repaired without authorization, the one-year warranty period will be cancelled and relevant fees will be charged for maintenance.
- Machine failures caused by non-standard operation are not covered by the warranty.

 **Do not stare at the operating light source**

8

## Technical Data

Model	C30Bi
Lithium Battery	DC7.4V 3350mAh 24.8Wh
USB-C Port Input	5V=3A, 9V=3A, 12V=3A
Brightness Range	0%-100%
CCT Range	2800K-6500K
Charging Time	≈ 2h
Working Time	≈ 45min (100% brightness output) ≈ 276min (50% brightness output)
CRI	Average≥ 94
TLCI	Average ≥ 96
Working Environment Temperature	-10°C ~ 40°C
Bare Light Dimension	≈ 5.24" *3.07" *1.02"
Bare Light Net Weight	≈ 248g

Specifications and data may subject to changes without notice.

## FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and  
(2) This device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

8

## Foreword

Thank you for purchasing !


The newly launched C30Bi is a delicate pocket-size LED light equipped with dual dials to adjust brightness and CCT respectively, quite suitable for comic exhibition shooting, camera filling light, food exploration, Vlog filling light and etc.

## Name of Parts

- Light Beads
- 1/4" Screw Hole
- USB-C Port
- Brightness Adjust Dial
- CCT Adjust Dial



- Battery Level Indicator ①
- Battery Level Indicator ②
- Battery Level Indicator ③
- Battery Level Indicator ④

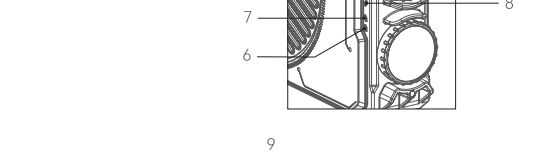

## IC Warning

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- This device may not cause interference, and
- This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:


- l'appareil ne doit pas produire de brouillage, et
- l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement

## Declaration of Conformity

GODOX Photo Equipment Co.,Ltd. hereby declares that this equipment are in compliance with the essential requirements and other relevant provisions of Directive GPSR(EU)2023/988,2014/30/EU. They are allowed to be used in all EU member states. For more information of DoC, Please click this web link: <https://www.godox.com/eu-declaration-of-conformity/>

9

## What's Inside

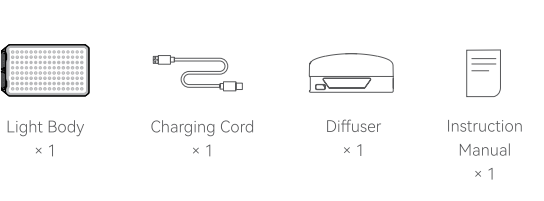

**Note:** Due to continuous updates and upgrades of the products, there may be differences between the actual products and the pictures. Therefore, the pictures are for reference only, products to prevail in kind.

## Mount onto the Bracket

The 1/4" screw hole design allows for quick mounting to the optional bracket by rotating clockwise to lock the screw after alignment.

## Charging

Connect USB-C port of the light body to the power source with the attached charging cord to charge the light.

## Battery Level Indicators

here are four battery level indicators , through which you can check the remaining battery level, when the device is in low battery, please charge it in time. Indicator ① lights up indicates that the current battery level is 0%-25%. Indicator ② lights up indicates that the current battery level is 26%-50%. Indicator ③ lights up indicates that the current battery level is 51%-75%. Indicator ④ lights up indicates that the current battery level is 76%-100%.

10

## Warranty

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safe-keep it. Thank you!

<b>Product Information</b>	Model	Product Code Number
<b>Customer Information</b>	Name	Contact Number
	Address	
<b>Seller Information</b>	Name	
	Contact Number	
	Address	
	Date of Sale	
<b>Note</b>		

Note: This form shall be sealed by the seller.

### Applicable Products

The document applies to the products listed on the Product Maintenance Information (see below for further information). Other products or accessories (e.g. promotional items, giveaways and additional accessories attached, etc.) are not included in this warranty scope.

### Warranty Period

The warranty period of products and accessories isimplemented according to the relevant Product Maintenance Information. The warranty period is calculated from the day(purchase date) when the product is bought for the first time.And the purchase date is considered as the date registered onthe warranty card when buying the product.

### How to Get the Maintenance Service

If maintenance service is needed, you can directly contact the product distributor or authorized service institutions. You can also contact the Godox after-sale service call and we will offer you service. When applying for maintenance service, you should provide valid warranty card. If you cannot provide valid warranty card,

10

## Brightness Adjust Dial

OFF (turn off)

Brightness Range: 0%-100%

Rotate clockwise to turn on the light source and increase the brightness, rotate counterclockwise to decrease the brightness and turn off the light source.

## CCT Adjust Dial

CCT Range: 2800K-6500K

Rotate clockwise to increase the CCT, rotate counterclockwise to decrease the CCT.

Note: Rotate the dial according to the markings on it, the marking corresponding to the red dot indicates the current brightness and CCT ranges (There are positive and negative tolerances for CCT range).

11

11

we may offer you maintenance service once confirmed that the product or accessory is involved in the maintenance scope, but that shall not be considered as our obligation.

### Inapplicable Cases

The guarantee and service offered by this document are not applicable in the following cases: The product or accessory has expired its warranty period; Breakage or damage caused by inappropriate usage, maintenance or preservation, such as improper packing, improper usage, improper plugging in/out external equipment, falling off or squeezing by external force, contacting or exposing to the improper temperature, solvent, acid, base, flooding and damp environments, etc; Breakage or damage caused by non-authorized institution or staff in the process of installation, maintenance, alternation, addition and detachment; The original identifying information of product or accessory is modified, alternated, or removed; No valid warranty card; Breakage or damage caused by using illegally authorized, nonstandard or non-public released software; Breakage or damage caused by force majeure or accident; Breakage or damage that could not be attributed to the product itself. Once met these situations above, you should seek solutions from the related responsible parties and Godox assumes no responsibility. The damage caused by parts, accessories and software that beyond the warranty period or scope is not included in our maintenance scope. The normal discoloration, abrasion and consumption are not the breakage within the maintenance scope.

## Maintenance and Service Support Information

The warranty period and service types of products are implemented according to the following Product Maintenance Information:

Product Type	Name	MaintenancePeriod(month)	Warranty Service Type
Parts	Circuit board	12	Customer sends the product to designated site
Other Items	Lamp body, lamp cover, locking device, package, etc.	No	Without warranty

Godox After-sale Service Call +86-755-29609320(8062)

11

12

13

14