

Godox

GODOX Photo Equipment Co.,Ltd.

Factory Add: 4th Floor of Building 1, 1st to 4 th Floor of Building 2, 4th Floor of Building 3,1st to 4th Floor of Building 4,
Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China
TEL: +86-(0)755-25701197,25726373 FAX: +86-(0)755-25723423 Email: godox@godox.com

www.godox.com

[f](#) godoxglobal [y](#) GODOX Global [i](#) godoxphotoequipment [t](#) GODOX Photo [d](#) godoxofficial

Godox

Godox FS200

Godox FS100

Godox FS200S

CONTINUOUS LIGHTING

2025 | 6th
EDITION



EMBRACE CREATIVE POSSIBILITIES

At Godox, we believe every creative idea worth exploring. That’s why Godox is always with the creative minds, providing them with tools they need to explore their creativity, start their business, and pursue their dreams.

Since 1993, Godox has been dedicated to developing and delivering great and accessible lighting and audio solutions for photographers, videographers, filmmakers, and all potential creators. Godox is always moving forward to push the boundaries of technology. Adhere to our mission, Godox constantly brings innovative and professional products to the industries.

Embrace creative possibilities as more than just a tagline, we hope to empower every creative mind from every corner of the world, regardless of different careers or cultural backgrounds, giving them a chance to explore, create, express, and inspire the world.

CONTENTS



Director: Jameson Brooks

05 • COB Lights

ML60IIBi/ML100Bi/ML100R
SL60IID/SL60IIBi
SL100D/SL100Bi
SL150III/SL150IIIBi/SL200III/SL200IIIBi/SL300III/SL300IIIBi
SL150R/300R

19 • Focusing Lights

S30
S60/S60Bi

25 • Panel Lights

P260C Pro
LDP8D/LDP8Bi/LDP18D/LDP18Bi
LDX50R/LDX50Bi/LDX100R/LDX100Bi
LED1000IID/LED1000IIBi
LEDP120C/LEDP260C

33 • Foldable LED Mat

FH50R/FH50Bi
FL100R/FL200R/FL200SR
FL60/FL100/FL150S/FL150R

39 • Hybrid Flash LED Lights

FV150/FV200
LF308

43 • RGBWW Tube Lights

TL30
TL60

TL120
TL180

52 • Light Sticks

LC500mini/LC500Rmini
LC500R(GBWW)
LC500
LC1000R/LC1000Bi

57 • Dive Lights

WT25D/WT40D/WT60D
WT25R/WT40R/WT60R(GBWW)

61 • Streaming Lights

ES30
ES45
LR120/LR150
LR160/LR180

68 • Waterproof Lights

WL4B
WL8P

71 • Smartphone Lightings

MA5R
AM01
R1 (GBWW)

R1 (GBWW)
M1 (GBWW)
LEDM32/LEDM150

77 • LITEMONS Series

LA600R/LA600Bi
LA150R/LA200R/LA300R/LA300Bi
LA150D/LA150Bi/LA200D/LA200Bi
LP400R/LP600R/LP1200R/LP400Bi/LP600Bi/LP1200Bi
C30Bi/C30R
LC30D/LC30Bi
LED6R(GBWW)/LED6Bi

91 • Godox Control

APP Control
Remote Control
Wireless DMX Control

95 • Lens&Gobos

Fresnel Lens System
Spotlight Attachment
Projection Attachment
Projection Attachment Adapter

107 • Accessories

Softbox Series
Collapsible Lantern
Lighting Stands & Mounting
Carrying Bags

COB LIGHTS



ML60IIBi



22500Lux 5600K
@1m with standard reflector



2800K-6500K

CRI
96+

CRI 96+

TLCI
97+

TLCI 97+

526G

Lightweight



11 FX Effects



Godox Light APP
Control



Charging Case
Powered by AC/DC

Key Features

- Super Lightweight & Compact Design
- One-Handed Outdoor Gear
- Smaller Bag Carrying Bigger Convenience
- high CRI/TLCI at 96+/97+
- 2800-6500K Color Temperature Range
- Upgraded Lamp Beads for Stunning Brightness
- 11 built-in FX effects
- Fuel Creativity With Versatile Accessories
- Adaptable Lighting in Any Space
- APP Control

Tech Specs

Model	ML60IIBi
Power Supply	20V=3.5A
Input Power	Max. ≈70W
Brightness Range	0%-100%
CRI	Average≥96
TLCI	Average≥97
CCT	2800-6500K
FX Type	11
Bluetooth Control Distance	Max.30m
Working Environment Temperature	-10°C ~+40°C
Dimension	3.46*3.62*4.38"
Net Weight	≈526g
(Lamp Head Protective Cover Included)*	

Optional Purchase



ML60IIBi Kit 1

Light Body	×1	Adapter	×1
Reflector	×1	Lamp Head Protective	
AD-E2 Bracket	×1	Cover	×1
Carry Bag	×1	AK-B01 NP-F Battery	
AC Power Cord	×1	Accessory Kit	×1



ML60IIBi Kit 2

Light Body	×1	Adapter	×1
Reflector	×1	Lamp Head Protective	
AD-E2 Bracket	×1	Cover	×1
Carry Bag	×1	AK-B02 V-Mount Battery	
AC Power Cord	×1	Accessory Kit	×1



ML100Bi



34300Lux
5600K@1m
with ML-L15

CRI
97+

CRI 97+

TLCI
98+

TLCI 98+



2800K-6500K

487g

Lightweight



11 FX Effects



Godox Light APP
Control



Type-C
Power Supply



AC/DC
Power Supply



Godox Mount

Key Features

- Weighs Only 487g
- 34,300lux @1m with Lens Reflector
- Wide CCT Range: 2800-6500K
- Portable Brilliance in Pocket-sized Design
- Diverse Power Supply: DC/USB-C/V-mount Battery
- Comprehensive Accessory System with Godox Mount
- Seamless Workflow with Godox Light App

Optional Purchase



ML100Bi (With Carry Bag)

Light Body	×1	AC Power Cord	×1
Lens Reflector ML-L15	×1	Holder AD-E2	×1
Adapter	×1	Storage Bag	×1
Lamp Head Protective Cover	×1		



ML100Bi Kit1

Light Body	×1	Lens Reflector ML-L15	×1
Mini Tripod MT01	×1	Storage Bag	×1
Power Bank Holder		AC Power Cord	×1
PH01 Adapter	×1	Lens Reflector ML-L36	×1
Holder AD-E2	×1	Lamp Head Protective Cover	×1



ML100Bi Kit2

Light Body	×1	AC Power Cord	×1
Lens Reflector ML-L15	×1	V-mount Battery Accessory	×1
Holder AD-E2		Kit AK-B02	
Adapter	×1	Storage Bag	×1
Lens Reflector ML-L36	×1	Lamp Head Protective Cover	×1





ML100R



Compact & Portable



Full Color



Fun-packed Accessories



Versatile Power Options



Godox Mount

The ML100R is a lightweight, full-color light with versatile features. It offers portable light-shaping accessories, mobile power options, and innovative mixing technology. With full-color adjustability, it enables limitless creativity, making it ideal for filmmakers and content creators who need mobility and flexibility.


- Key Features
- Innovative mixing technology for vibrant, accurate color
 - Wide color temperature: 1800K-10000K
 - Godox-Mount Ecosystem for seamless accessory integration
 - Compact & portable design for easy mobility
 - 5 power solutions for flexible operation
 - New creative accessories: collapsible fresnel and air soft tube

Tech Specs


Model	ML100R
DC Input Port	20V=6A
	Input Power≈110W
CCT	1800K-10000K
Brightness Range	0%-100%
Dimming Curves	linear, S-curve, exponential, logarithmic
FX Mode	14
CRI	≈95
TLCI	≈95
Controlling Methods	Bluetooth app/light body control
Bluetooth Controlling Distance	30m
Working Environment Temperature	-10°C~40°C
Dimension of Bare Light	≈4.8"×1.81"×4.33"
Net Weight of Bare Light	≈465g




Reflector



RF-ML15
15° Reflector




RF-ML36
36° Reflector




RF-ML45
45° Reflector

Fresnel




ML-CFL5
Collapsible Fresnel Attachment


Softbox




ML-CS30
Collapsible Lantern Softbox



ML-SF3030
Square Softbox




ML-SF50
Octagon Softbox




AD-S60S
60cm Softbox

AirTube




ML-S1A
Air Soft Tube

Adapter




ML-GB
Bowens Mount Adapter

CollapsibleDiffuser




ML-CS1625
Collapsible Soft Tent




ML-CD15
Collapsible Diffusion Dome


Power Solution




BG02
Battery Grip



AK-B02
V-Mount Battery Accessory Kit



AK-B02
V-Mount Battery Accessory Kit



PH01
Power Bank Holder

11

12

ML Series Accessories

Projection Attachment

MLP



MLP19K
19° Projection Attachment



MLP26K
26° Projection Attachment



MLP36K
36° Projection Attachment

Accessories for MLP



MLP-01
Projection Lens 19°



MLP-02
Projection Lens 26°



MLP-03
Projection Lens 36°



CB92
Lens Portabe Bag



MLP-ID
Iris Diaphragm



Set MLP-11T
CCT Adjustment



Set MLP-11C
Color Effects

ML-SP



ML-SP-19°
Godox-mount LED Projection 19°



ML-SP-36°
Godox-mount LED Projection 36°



ML-SP-50°
Godox-mount LED Projection 50°

Accessories for ML-SP



SP-19°
Projection Lens 19°




SP-36°
Projection Lens 36°



SP-50°
Projection Lens 50°

Gobo Set for MLP & ML-SP



Gobo Set
SA-09-001




Gobo Set
SA-09-002



Gobo Set
SA-09-003



Gobo Set
SA-09-004



Gobo Set
MLP-GS



SP-DUST
Projection Diffsuer



SP-CTF
Color Frame



SP-ID
Iris Diaphragm



SP-CF
Gobo Holder



Set MLP-11T
CCT Adjustment



Set MLP-11C
Color Effects

SL Series LED Light

SL60IID/SL60IIBi



The newly SL60IID and SL60IIBi are updated with stronger output, empowering your ideas. Controlling gets easier by connecting to the APP via Bluetooth. Changing between shooting spots becomes more convenient with its smaller size. Building a diverse ambiance comes more straightforward thanks to the bi-color version.

Key Features

- High maximum output of 18,600 Lux (SL60IID) and 25,100 Lux (SL60IIBi) at 1 meter with standard reflectors.
- Convenient control options including on board control, remote, APP, and DMX.
- Adjustable color temperature range from 2800K to 6500K (SL60IIBi).
- Built-in FX effects with 8 options (SL60IID) and 11 options (SL60IIBi).
- Compatible with a wide range of accessories through the Bowens mount.
- High color accuracy with CRI/TLCI ratings of 96+/97+.

Tech Specs

Model	SL60IID
Power Supply	100V-240V~50/60Hz 0.7A
Power	Max.70W
CCT	5600±200K
Channel	32
Group	16 (A,B,C,D,E,F,0-9)
ID	1-99/OF
CRI	≥96
TLCI	≥97
FX Type	8
Control Method	2.4GHz Wireless/Bluetooth/ Light Body Control
2.4GHz Transmission Distance	≈30m
Bluetooth Transmission Distance	≈30m
Brightness Range	0%-100%
Working Environment Temperature	-10°C-40°C
Dimension (unfolded without reflector)	140*236*215mm
Net Weight≈	1.43kg

Model	SL60IIBi
Power Supply	100V-240V~50/60Hz 0.75A
Power	Max.75W
CCT	2800K-6500K
Channel	32
Group	16 (A,B,C,D,E,F,0-9)
ID	1-99/OF
CRI	≥96
TLCI	≥97
FX Type	11
Control Method	2.4GHz Wireless/Bluetooth/ Light Body Control
2.4GHz Transmission Distance	≈30m
Bluetooth Transmission Distance	≈30m
Brightness Range	0%-100%
Working Environment Temperature	-10°C-40°C
Dimension (unfolded without reflector)	140*236*215mm
Net Weight≈	1.5kg



For those pursuing the best power out of limited budget, Godox has SL100D and SL100Bi for you. Compact unit with high brightness, SL100 twins work well for small space lighting. Daylight SL100D as basic solution while the Bi-color SL100Bi for more creativity. Bowens mount makes it easier to choose accessories. Want to gain popularity as a Youtuber, live streamer, content creator or commercial producer, Lighting with SL100 will be a good start.

Key Features

- Dependable 5600K SL100D and variable (2800~6500K) SL100Bi feature a high CRI/TLCI rating of 96/97 that translates to advanced accuracy in color rendering.
- SL100D offers Lightning 1/2/3, Flash, Conference, Paparazzi, Television, and Broken Bulb , and based on that SL100Bi has 3 additional light effects: Candle, Fire, Firework.
- With its compact design, you can freely use it in home or small studio settings.
- Bowens front accessory mount allows use of Godox modifiers and those of the many manufacturers that use this popular mount.
- Dual dials and clearly marked buttons offer intuitive user interface
- The SL100D/SL100Bi functions can be adjusted on the fixture, with a smartphone using the Godox Light App, or with an optional wireless remote.



2800K-6500K
(SL100Bi)



0-100% Brightness
Adjustment



Godox Light App
Control



SL100Bi: 11
SL100D: 8

Tech Specs

LED Light	SL100D	SL100Bi
Power Supply	AC100V~240V(50/60Hz)	
Output Power	100w	
Channel	32	2800K~6500K
Group	16(0~9/A B C D E F)	
ID	OFF/1-99	
Color Temperature	5600K	
Light Adjustment Range	0%~100%	
100% Illuminance(LUX) (with standard reflector,testing distance,1m)	≈32100	
CRI	≥96	11
TLCI	≥97	
Temperature of Working Environment	-10°~40°	
Light Effect Mode	8	
Control Method	Smartphone APP/2.4G Wireless	
Bluetooth Transmission Distance	≈30m	
2.4G Wireless Transmission Distance	≈30m	
Beam Angle	120°	
Dimension	243*205*127mm	

SL100D-K2

SL100D	×2
304 Light Stand	×2
SB-BW-6090 Softbox	×2
RC-A6 Remote Control	×1
CB-04 Carrying Bag	×1



SL100Bi-K2

SL100Bi	×2
304 Light Stand	×2
SB-BW-6090 Softbox	×2
RC-A6 Remote Control	×1
CB-04 Carrying Bag	×1



SL Series LED Video Light

SL150III/SL200III/SL300III
SL150IIIBi/SL200IIIBi/SL300IIIBi



While Godox always keeps pursuing progress, the SL series has evolved to provide a more convenient and efficient experience. Inheriting the excellent quality and performance of the predecessor, now the SLIII (SL150III/SL150IIIBi/SL200III/SL200IIIBi/SL300III/SL300IIIBi) comes with the added Godox Light App control, offering you more flexibility on set. It's an ideal solution for live streaming, broadcasting, and other video applications.

Key Features

- Stepless adjustment from 0% to 100%.
- Optional Daylight version or Bi-color version.
- Silent mode especially suitable for sound-sensitive applications.
- High CRI/ TLCI rating ≈96/97
- The rotatable U-shaped yoke offers excellent flexibility and can be used with most light stands.
- Multiple control methods including onboard control, wireless remote control and Godox Light App control.
- Built-in FX effects.
- Bowens mount for wide compatibility.

Tech Specs

Model	SL150III	SL200III	SL300III	SL150IIIBi	SL200IIIBi	SL200IIIBi
Power Supply	100V-240V ~50/60Hz	100V-240V ~50/60Hz	100V-240V ~50/60Hz	100V-240V ~50/60Hz	100V-240V ~50/60Hz	100V-240V ~50/60Hz
Output Power	Max. 160W	Max. 215W	Max. 330W	Max. 160W	Max. 215W	Max. 330W
CCT	5600K±200K	5600K±200K	5600K±200K	2800K-6500K	2800K-6500K	2800K-6500K
TLCI	≈97					
CRI	≈96					
Brightness Range	0%-100%					
Channel	32(1-32)					
Group	16(A, B, C, D, E, 0-9)					
ID	99(01-99)					
Control Method	2.4GHz Control/Bluetooth APP Control/Light Body Control					
2.4GHz Control Distance	≈50m					
Bluetooth Control Distance	≈30m					
Working Environment Temperature	-10℃~40℃					
Dimension	34*20*16cm	36.7*20*16cm	36.2*19.4*31cm	19.9*28.5*28.8cm	19.9*31.1*29.5cm	19.9*35.6*31.6cm
(excluding reflector)						
Net Weight	≈2.8kg	≈3kg	≈3.6kg	≈3.1kg	≈3.25kg	≈3.59Kg

SL Series LED Video Light


SL150R/300R



SL300R




SL150R


26000lux(SL150R)
43300lux(SL300R)
@1m 5600k with standard reflector

CRI
96+
CRI 96+

TLCI
96+
TLCI 96+


2500K-10000K


Multiple Color
Modes


Gel Mode



Godox Light APP
Control



DMX512 Control



14 FX Effects



Remote Control



Mute Mode

Get ready for the SL150R/300R from the SL series. Access versatile lighting effects with a Bowens mount and take control of diverse lighting effects using CCT, HSI, RGB, GEL modes, empowered by RGBWW technology for enhanced color rendition. Ensure noise-free shooting with the mute mode. The SL150R/300R offers compact yet powerful solutions for a range of scenes, from live stream studios and interviews to theater stages.

Key Features

- Powerful Output
- Designed in a compact construction
- 2500K-10000K
- High CRI/TLCI at 96+(SL300R)
- 14 FX Effects
- Experience versatile lighting effects with the Bowens mount
- Take complete control of your color palette with HSI, RGB, and GEL modes
- Enjoy noise-free shooting with the mute mode
- Customize your lighting with ease using DMX512, remote control, APP, or the light body

Tech Specs

Model	SL150R	SL300R
Power Supply	36V ≈ 4.6A	52V ≈ 5.7A
Input Power	Max. ≈165W	Max. ≈310W
CCT	2500-10000K	
Brightness Range	0%-100%	
FX Type	14	
CRI	Average≥95	
TLCI	Average≥96	
CH	32(1-32)	
GR	16(A-F 0-9)	
ID	99(1-99)	
Mode	CCT CCT mode/HSI mode/ RGBW mode GEL mode/FX mode	
Controlling Mode	2.4G wireless control/DMX 512 control Bluetooth control/light body control	
2.4G Controlling Distance	Max.50m	
Bluetooth Controlling Distance	Max.30m	
U-type Bracket Adjustment Angle	360°	
Working Environment Temperature	-10℃ ~+40℃	
Dimension	288*199*283mm	315*199*342mm
Net Weight	2.35kg	2.77kg



Photographer: Luke Edmonson, David Edmonson



S30

The focusing LED light S30 is a suitable light source for video lighting, interviewing, headshot, still life photography, portrait, wedding photography, and pre-wedding photography, and also a good choice for enthusiasts who want creative lighting.



Even and Smooth Beam (with projection attachment)

Key Features

- Outstanding Lighting Effects**
- An aspheric optical lens gives S30 with a CRI and TLCI rating of 96+, S60 CRI/TLCI ratings of 96+/97+ and guarantees natural, pristine color in any application.
- Precise Control of Light Coverage**
- With a beam angle from 6 to 55 degrees, you can get the output spread size you need by adjusting the rotary knob on the back. An optional projecting lens makes it useful lighting details.
- Multiple Options of Power Supply**
- Three ways of power supply offer great convenience for S30, portability and wide application



Power supplied by DC adapter (15V/4A)

Power supplied by li-ion battery (Sony NP-F970/F950/F930) (7.4V)

Power supplied by power bank with a USB cable(5V/2A)

Tech Specs

LED Light	S30	
Power Supply	DC adapter 15V/4A	Power 30W
	Li-ion battery(Sony NP-F970/F950/F930)7.4V	Power 10W
	Power bank with a USB cable 5V/2A	Power 10W
Output Power	30W	
Color Temperature	5600K±150K	
Beam Angle	6°~55°	
100% Illuminance	Flood(Central Area)≈ 2800	
(LUX)1m, dark room	Spot (Central Area)≈ 11300	
CRI	96	
TLCI	97	
Brightness Range	10%~100%	
Channel, Group	-	
Operation Temperature	-10~50℃	
Net Weight(≈)	907g	
Dimension(≈)	215*108*100mm	



S60




S60Bi

Beam angle from 6 to 55 degrees, you can get the ideal spotlight size by adjusting the rotary knob on the back. With a projecting lens (optional) light can be focused at its extreme. This controllability makes S60 series perfect for lightening any details.

Key Features

- Beam angle from 6 to 55 degrees, light where you want
- Variable Color Temperature
- High color rendering CRI/TLCI rating of 96+/97+
- Lighting FX
- Silent mode
- Control by Godox Light app, remote RC-A6 or DMX


More Features of S60 Series

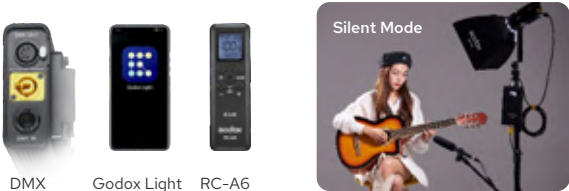

Tech Specs

Model	S60Bi	S60
Power Supply	AC Power Supply100~240V 50/60HZ 0.9A MAX	AC: 100~240V 50/60Hz 0.9A
	V-port battery Standard voltage: 14.8V (optional)	V-port battery standard voltage 14.8V(optional)
Output Power	77W (Max)	60W
Color Temperature	2800-6500K	5600K±300K
100% Illuminance(LUX)		Flood(Central Area) 3200
(1m,darkroom) (≈)		Spot(Central Area) 4000
CRI	≈96	≥96
TLCI	≈97	≥97
Brightness Range	0~100%	0~100%
Channel(CH)	32 (1 to 32)	32 channels(1 to 32); 16(A to F/0 to 9)
Group (GR)	16 (A to F/0 to 9)	
Beam Angle	6°-55°	
Working Environment Temperature	-10~40°C	-10~40°C
Control Method	Smartphone APP/2.4G wireless/remote/control/DMX control	
2.4G Wireless Transmission Distance(≈)	50m	
Dimension(≈)	Light body: 264*107*100mm	Light body 264*107*100mm
	Controller: 233*112*61mm	Controller 268*113*64mm
New weight(≈)	Light body: 1.36kg	Light body: 1.36kg
	Controller: 1kg	Controller 0.94kg

Abundant Accessories



SA-08 Barndoor Set



SA-30/SA-20 Softbox



SA-05 Scrim Set




SA-07 Scrim Set



SA-06 Iris Diaphragm



SA-09 GOBO set



SA-11C/SA-11T Colors gels

Projection attachment: project a highly focused and controlled beam of light.This attachment is what enables you to get the utmost out of creativity of Focusing light series for it is specially designed for fitting a vast range of light shaping accessories.



S30-D Three-light kit

Light Head	×3
Wrench	×1
Power Cord	×3
Connect Cable	×3
Controller Box	×3
SA-30 Softbox	×2
SA-05 Scrim Set	×1
SA-06 Iris Diaphragm	×1
SA-07 Framing Shutter	×1
SA-08 Barndoor Set	×3
SA-09 GOBO Set	×1
SA-10 GOBO Holder	×1
SA-11C Color Filters of Color Effects Set	×1
SA-11T Color Filters of Color Temperature Adjustment Set	×1

SA-P Projection Attachment (included a SA-01 85mm lens)	×1
213B Light Stand	×3
Remote Control RC-A6	×1
CB14 Carrying Bag for Light Stand	×1
CB21 Carrying Case for Kit	×1



S60-D Three-light Kit

1.Light Head	×3
2.Wrench	×1
3.Power Cord	×3
4.Connect Cable	×3
5.Controller Box	×3
6.SA-30 Softbox	×2
7.SA-05 Scrim Set	×1
8.SA-06 Iris Diaphragm	×1
9.SA-07 Framing Shutter	×1
10.SA-08 Barndoor Set	×3
11.SA-09 GOBO Set	×1
12.SA-10 GOBO Holder	×1
13.SA-11C Color Filters of Color Effects Set	×1
14.SA-11T Color Filters of Color Temperature Adjustment Set	×1
15.SA-P Projection Attachment (included a SA-01 85mm lens)	×1
16.CB21 Carrying Case for Kit	×1
17.Remote Control RC-A6	×1
18.213B Light Stand	×3
19.CB14 Carrying Bag for Light Stand	×1

S60Bi-K3 Three-light Kit

1.Light Head	×3
2.Wrench	×1
3.Power Cord	×3
4.Connect Cable	×3
5.Controller Box	×3
6.SA-30 Softbox	×2
7.SA-05 Scrim Set	×1
8.SA-06 Iris Diaphragm	×1
9.SA-07 Framing Shutter	×1
10.SA-08 Barndoor Set	×3
11.SA-09 GOBO Set	×1
12.SA-10 GOBO Holder	×1
13.SA-11C Color Filters of Color Effects Set	×1
14.SA-11T Color Filters of Color Temperature Adjustment Set	×1
15.SA-P Projection Attachment (included a SA-01 85mm lens)	×1
16.CB52 Carrying Bag for Light Stand	×1
17.Remote Control RC-A6	×1
18.213B Light Stand	×3
19.CB51 Carrying Case for Kit	×1




PANEL LIGHTS





P260C Pro

With a sleek design and powerful 45W input, the P260C Pro offers superior brightness and soft lighting. Enhanced with a side-emitting design, a new diffuser, and NFC light addition function that significantly improves lighting efficiency, the P260C Pro ensures superior lighting quality for a variety of shooting scenarios, including live streaming, interviews, and weddings.

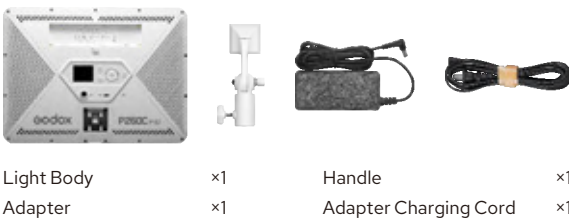

Light Body Adapter x1 x1 Handle Adapter Charging Cord x1 x1

Key Features

- High Power, High Brightness
- Enhanced Diffuser for Softer Light
- Ultra-Thin Design
- Lithium battery/USB-C/DC power supply
- 2800K-6500K
- CRI/TLCI 98+
- Smart Lighting Control

Tech Specs

Model	P260C Pro
CCT	2800K-6500K
Input Power	45W
CRI	Average≥98
TLCI	Average≥98
Controlling Methods	Bluetooth Control/Light Body Control
Working Environment Temperature	-10°C~+35°C
Dimension (including handle)	≈328*323*42mm
Net Weight (including handle)	≈1.2kg



LED Video Light

LDP8D/8Bi/18D/18Bi



To brighten your subjects on location, the LDP series LED light is a sleek and lightweight option that fits snugly onto your camera. Its innovative side-mounted chip design delivers an extremely soft light that adds a touch of magic for filming vlogs, weddings, foods, etc. It is a must-have tool for those seeking to present creativity while staying nimble and free.

Key Features

- The unique mounted LED chips make the emitted light even softer.
- Enjoy the ultra-light design for easy shooting on location.
- High color accuracy with TLCI ratings of 95+.
- Adjustable color temperature ranges from 2800K to 6500K (LDP8Bi/18Bi).
- Built-in FX effects with 22 options (LDP8D/18D) and 31 options (LDP8Bi/18Bi).
- Stable output with 0% to 100% brightness range.
- Support DC power supply/NP-F battery power supply.



Tech Specs

Model	LDP8D	LDP18D	LDP8Bi	LDP18Bi
DC Inputs	5V=2A	12V=2A	5V=2A	12V=2A
Input Power	≈10W	≈21W	≈10W	≈22W
Power Supply	DC power supply/NPF battery power supply (NPF battery is sold separately)			
Brightness	0%-100%	0%-100%	0%-100%	0%-100%
Ra	average≥92	average≥95	average≥96	average≥96
TLCI	average≥97	average≥95	average≥98	average≥97
Working Environment Temperature	-10℃~40℃	-10℃~40℃	-10℃~40℃	-10℃~40℃
CCT	5600K	5600K	2800-6500K	2800-6500K
Dimension	147*105*33mm	210*149*31mm	147*105*33mm	210*149*31mm
Net Weight≈	194g	363g	194g	363g

RGBWW Panel Light

LDX50R/50Bi/100R/100Bi



LDX50Bi/R and LDX100Bi/R come to elevate your lighting experience. With the detachable diffuser, you can easily adjust the lighting ambiance from soft to high-intensity. The lights have metal casings that eliminate light noise and ensure long-lasting durability. With a diverse array of vibrant color modes, the RGBWW version helps ignite your imagination. Embark on an extraordinary journey of creativity as the LDX series lights set your creativity a blaze.

Key Features

- Detachable diffuser for customizable lighting options.
- The metal structure on the back ensures heat dissipation without noisy fans and enhances durability for long-term usage.
- Bi-color version with five preconfigured color temperatures (2800K/3200K/4300K/5600K/6500K) for easy application.
- Adjustable color temperature range: 2800K to 6500K (LDX50Bi/100Bi) and 2500K to 10000K (LDX50R/100R).
- Built-in FX effects with 11 types (LDX50Bi/100Bi) and 14 types (LDX50R/100R).
- Convenient control options: panel, remote control, and APP.
- Multiple power supply options: NP-F battery, V-mount battery, and DC power.

Tech Specs


Model	LDX50R	LDX100R	LDX50Bi	LDX100Bi
Power Supply	20V 3.5A	20V 6A	20V 3.5A	20V 6A
Total Power	Max.63W	Max.118W	Max.65W	Max.120W
CCT	2500K-10000K		2800K-6500K	
Brightness Range	0%-100%		0%-100%	
FX Type	14		11	
CRI	Average≥96		Average≥96	
TLCI	Average≥96		Average≥96	
Channel	32(1-32)		32(1-32)	
Group	16(A-F、0-9)		16(A-F、0-9)	
ID	99(1-99)		99(1-99)	
Controlling Method	2.4G remote control/Bluetooth APP Control/Light body control		2.4G remote control/Bluetooth APP Control/Light body control	
2.4G Controlling Distance	Max.50m		Max.50m	
Bluetooth Control Distance	Max.30m		Max.30m	
U-type Bracket Adjustable Angle	360°		360°	
Working Environment Temperature	-20℃~-+40℃ (in DC power supply)		-20℃~-+40℃ (in DC power supply)	
Dimension	357*305*75mm		357*305*75mm	
Net Weight≈	1.86kg		1.85kg	
		3.24kg		3.26kg

Optional Purchase

LDX50Bi/LDX50R




LDX100Bi/LDX100R

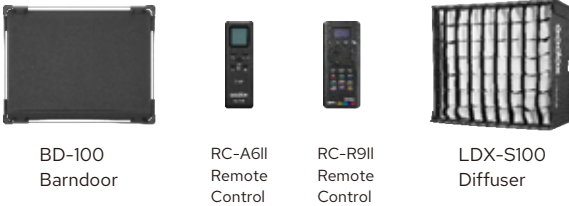

Panel Light

LED1000Bi II/LED1000D II

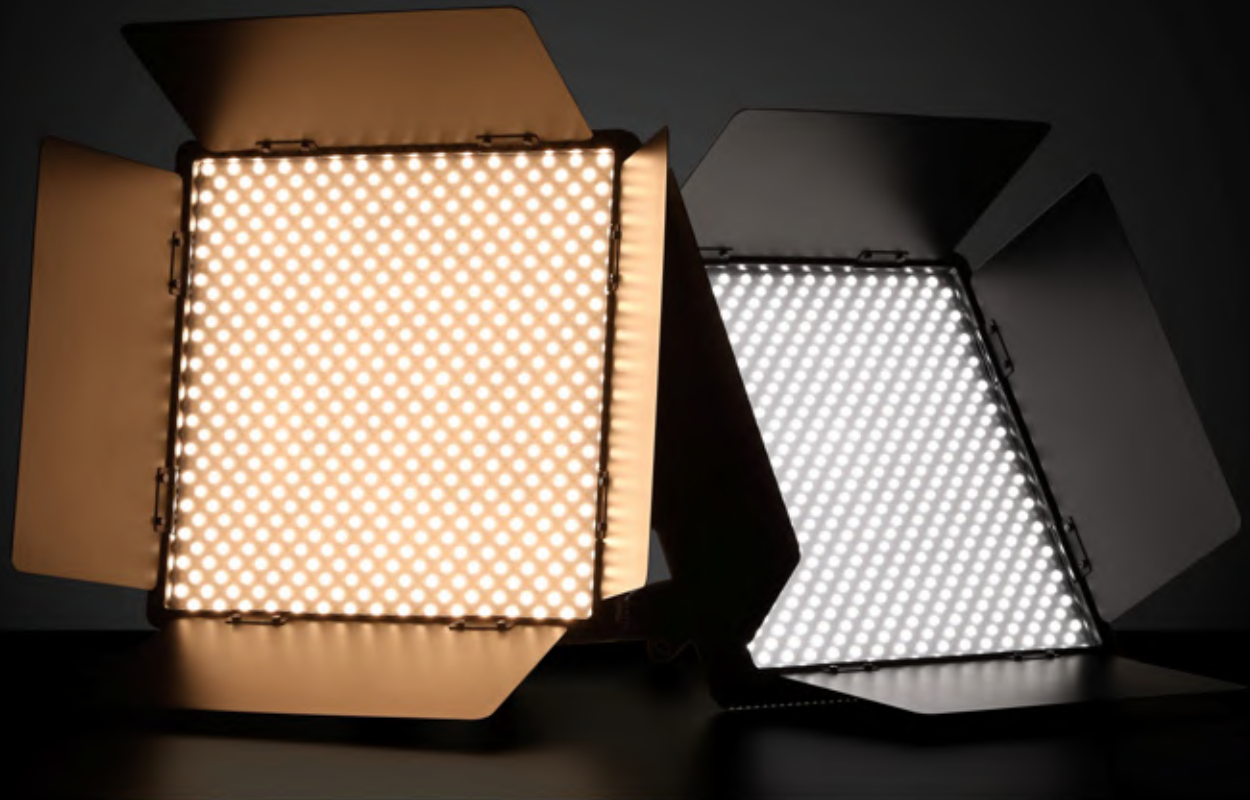

LED1000Bi II

LED1000D II

LED1000D II/LED1000Bi II video lights are excellent for product shooting, photojournalistic and video recording, etc. It provides a wide spectrum, beautifully soft and even illumination for photography.

Key Features

- Premium LED bulbs and wide screen offer high brightness
- Three models create various light effects
- Three control options to wirelessly adjust brightness or color temperature
- Lithium battery or DC charged



Tech Specs

LED Video Light	LED1000DII (daylight version)	LED1000BiII (Bi-color version)
Lithium Battery	14.8V Lithium battery (BP-L model)(sold separately)	
DC Power Supply	13~16.8V	
Channel	16	
Group	6 (A, B, C, D, E, F)	
Power	Max. 70W	
Color Temperature	5600K±300K	3300K~5600K±300K
100% Brightness(Lux)≈	5400 @1m	4800 @1m/4200K 2200 @1m/3300K 2600 @1m/5600K
CRI≈	96	
TLCI≈	98	
Dimming Range	0%~100%	
LED Beads Quantity	1024	5600K: 512/3300K: 512
Operation Temperature	-10~40℃	
Dimension	430*460*100mm	
Net Weight	2.51Kg	

Remote Control	RC-A5II
Power Supply	3.0V(AAA*2)(not included)
Wireless Frequency	433MHz
Distance (Open Area)	20m
Channel	16
Group	6 (A, B, C, D, E, F)
Standby Time	More than one year
Operation Temperature	-10~40℃
Dimension	120*38*15mm
Net Weight	30g

LED Panel Light

LEDP120C/LEDP260C



LEDP120C




LEDP260C


The LEDP120C and LEDP260C video light are excellent for macro photography, wedding shooting, product shooting, photo journalistic and video recording, etc. The lightweight and portable light provides high brightness, convenient operation and accurate color temperature.

Key Features

- High-quality LED blubs
- Using lithium battery with great portability
- Soft and even illumination
- Included with a L-type bracket
- Fits almost any cameras and camcorders

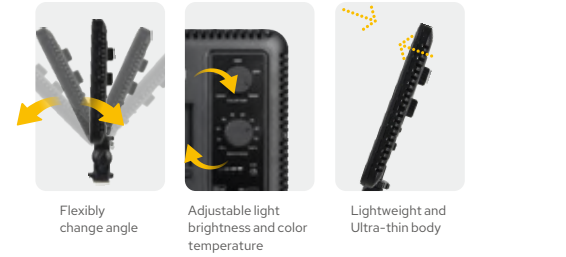

- With the wide spectrum, soft light and accurate color temperature
- Wireless grouping system (6 groups & 16 channels)
- Adjustable light brightness and color temperature
- Lithium battery or DC charged
- Large-sized LCD panel and settings auto saved
- Include a detachable handle and AC adapter

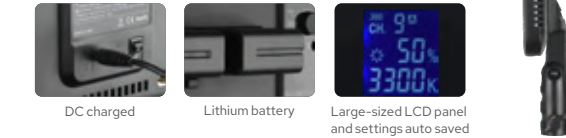

Tech Specs

LED Light	LEDP120C	LEDP260C
Power Supply	7.4V Lithium Battery (NP-F970 model lithium battery)(optional)	7.4V Lithium Battery (NP-F970 model lithium battery)(optional) DC Power Supply: 13-16.8V
Power	Max.12W	Max.30W
Channel	16	
Group	6(A, B, C,D, E, F)	
Color Temperature	3300K~5600K±300K	
Brightness(LUX)	580(0.5m/4500K) 630(0.5m/3300K) 680(0.5m/5600K)	2050 (0.5m/4500K) 2050 (0.5m/3300K) 2200 (0.5m/5600K)
Dimming Range	10%~100%	
CRI	≥95	≥95
TLCI	≥95	≥94
Operating Temperature	-10~40℃	
Package Weight	220g	917g
Box Dimensions (LxWxH)	175*130*17mm	360*240*27mm
	not with the L-type Bracket	

Remote Control	RC-A5
Power Supply	3.0V(AAA*2) (not include)
Wireless Frequency	433MHz
Distance (emptiness)	20m
Channel	16
Group	6 groups(A/B/C/D/E/F)
Standby Time	Over one year
Operation Temperature	-10~50℃
Dimension	120*38*15mm
Net weight	30g





FH50R

FH50Bi

The FH50Bi and FH50R flexible handheld LED Lights are compact, lightweight fixtures designed for flexibility. Measuring 1 x 1' and featuring a slim, bendable design, they fit well into tight spaces like car visors, wall corners, etc. High-quality metal frames enable tool-free lighting area adjustments. The lights are handy tools for live streamers, content creators, videographers, and filmmakers who require an adaptable and flexible lighting setup.

Key Features

- Swiftly shape illuminating areas with a secure metal frame after a single bend.
- Ultra-portable handheld design supports your on-the-go shootings.
- Color temperature from 2500K to 10000K(FH50R) and 2800K to 6500K(FH50Bi).
- HSI Mode in FH50R.
- 14 FX Effects in FH50R and 11 in FH50Bi.
- Control methods: APP/remote control/on board control.
- Power supply: AC adapter/V-mount battery/NPF battery.



FH50Bi



Light Body
Carry Bag
Adapter



×1
×1
×1



Stand Adapter
AC Power Cord

×1
×1

FH50R



Light Body
Carry Bag
Adapter



×1
×1
×1



Stand Adapter
AC Power Cord

×1
×1

Optional Purchase



Rectangular
Softbox FS50



Pancake
Lantern FP50



Handheld
Powering
Accessory
Kit ML-AK



AK-B01
NP-F Battery
Accessory Kit



AK-B02
V-Mount
Battery
Accessory Kit

Tech Specs

Model	FH50R	FH50Bi
Adapter Output Voltage	16.8V	
Input Power	Max.≈62W	
NPF Battery Specifications	7.2V-8.4V≈*2	
(available separately)		
V-mount Battery Specifications	14.8V≈	
(available separately)		
Color Temperature	2500K~10000K	2800K~6500K
Brightness Range	0%-100%	
FX Type	14	11
CRI	Average≥96	Average≥97
TLCI	Average≥96	Average≥97
Channel	32(1~32)	
Group	16(A-F, 0-9)	
ID	99: 1-99	
Mode	CCT/HSI/FX	CCT/FX
Controlling Method	2.4G Wireless Control/Bluetooth APP/ Light Body Control	
2.4G Wireless Control Distance	Max.50m	
Bluetooth Transmission Distance	Max.30m	
Working Environment Temperature	-10℃~40℃	
Dimension	317*311*34mm	
Net Weight≈	633g	570g



FL100R/FL200R/FL 200SR, a full-color flexible LED light mat, delivers vibrant color with multiple color modes empowering you to craft atmospheres effortlessly. Its foldable light body and palm size controller make it suitable for narrow space lighting, ideal for both studio and outdoor shooting. Available in three sizes and various diffusers, there must be one you need.

Key Features


- Ultra-thin and foldable light body
- Compact controller in one-hand Size
- Versatile full-color lighting
- Wide CCT range from 1,800K to 10,000K
- High color accuracy built to KNOWLED professional standard
- Powered by DC power supply and Single V-mount battery
- NFC pairing by Godox Light APP
- DMX control support
- Various sizes and accessories



Optional Purchase

Air Softbox Kit

Air Softbox Body	×1	Air Pump	×1
Grid	×1	Repair Patch	×2
Skirt	×1		



FA100 for FL100R



FA200 for FL200R



FA200S for FL 200SR

AirTube Kit

Air Tube	×1	Fabric Handle	×2
Skirt	×1	Connecting Holder	×1
Air Pump	×1	Velcro Hook Fastener	×1
Repair Patch	×2		



AT200 for FL200SR

Pancake Lantern

FP200 for FL200R



DMX Adapter Cable

DMX-TRS1



Skirt for K1 Softbox

SS-FS100 for FS100
SS-FS200 for FS200
SS-FS200S for FS200S

Tech Specs

Model	FL100R	FL200R	FL200SR
AC INPUT Port	100- 240V~50/60Hz 250W		
CCT Range	1800K-10000K		
GM Adjust	-100%-100%		
Brightness Range	0.0%-100.0%		
Dimming Curves	Linear, S-Curve, Exponential, Logarithmic		
CRI	≈95		
TLCI	≈95		
Controlling Methods	Wired DMX and RDM/Bluetooth app/ Controller Control		
Bluetooth Controlling Distance	30m		
USB-A Port	Firmware Upgrade/5V=1A Power Supply		
Working Environment Temperature	-20°C~45°C		
Dimension of Controller	≈4.09"*2.95"*6.3"		
Net Weight of Controller	≈0.85kg		
Dimension of Bare Light	13.54"*25.04"	25.08"*25.08"	13.54"*48.03"
Net Weight of Bare Light	0.6kg	1kg	1.05kg



FL150R




FL150S FL100 FL60



Use in combination



Color Temperature 3300K-5600K



Brightness (10%~100%)



Godox FL Series Flexible LED Lights are lightweight, portable, flexible and pliable as pieces of cloth to shape what you want.

Key Features


- Soft and even light effects & adjustable light brightness and color temperature.
- Compact and portable body with strong power. Suitable for lighting in small and narrow space.
- Can be folded to different shapes and used together to achieve creative light effects.
- Achieving wireless control by 433MHz grouping system (6 groups & 16 channels) with optional remote control and smartphone APP through Bluetooth.
- Powered by Lithium battery or DC power supply.
- With easy operation, great portability and compatibility.

Work with the accessories to achieve a softer lighting effect.



Easy to shape what you want

Providing a light source for all kinds of videorecording or photography in a narrow space !



Tech Specs

Flexible LED Light	FL150S/FL150R	FL100S	FL100R
Power Supply	AC100V-240V(50/60Hz)		
DC Power Supply	3.5A(DC16.8V,10A)	3A(DC16.8V,7A)	2.5A(DC16.8V,4.2A)
Lithium Battery	V-port battery		
Power	150W	100W	60W
Color Temperature	3300±200K/5600±200K		
100% Light			
Brightness (LUX)	<4300 Lux	<3300 Lux	<1800 Lux
(darkroom, 1m)			
TLCI	≥98		
CRI	>96		
Light Brightness Range	10%-100%		
OperationTemperature	-10°C~45°C		
Channel	16		
Group	6 group (A,B,C, D,E,F)		
Wireless Remote	<30m		
Control Distance			
Bluetooth Distance	<50m		
Dimension	60*60cm/30*120cm	40*60cm	30*45cm
Net Weight	3.9kg/4.37kg	3.47kg	2.87kg
(only the main light body)			



HYBRID FLASH LED LIGHTS

Photographer: Aries Tao

Hybrid Flashes and LED Lights

FV150/FV200



Flash Mode



The Brightness of Flash is Four Times of LED's



Over 10 Continuous Flashes Per Second in 1/2 Power



1/8000s HSS



Godox Wireless X System

LED Mode



Soft Light Effects



0-100% Precise Brightness Adjustment



8 FX Special Effects

High Speed Sync Flash and Continuous Light FV series add flash functions based on the traditional LED light. FV series can be served as a flash, as well as an LED light. With strong power, abundant functions and 8 FX special effects modes, it can achieve creative shooting easily. It fits for all kinds of shooting occasions, especially for children shooting due to its soft LED light source and strong power flash.

Key Features

As a Flash

- The flash's light brightness is four times of LED light's, which increase the freezing ability of instantaneous action.
- Supports 1/8000s high-speed sync function. Over 10 continuous flashes per second and 8 continuous flashes per second in high-speed sync mode in 1/2 power output.
- Built-in Godox 2.4G wireless receiver (X system), compatible with Canon, Nikon, Sony, Fuji, Panasonic, Olympus and Pentax cameras.
- 1/16-1/1 or 6.0-10.0 power output displayed in the form of fractions or decimal.
- Adjust modeling lamp's light brightness from 5% to 100%.

As a LED Light

- With soft light effects and high light brightness which can be precisely adjusted from 0% to 100%.
- With 8 FX special effects mode to simulate various of shooting scene and achieve creative shooting.

More Design Details

- Support wireless control (16 groups and 32 channels) with optional remote control.
- With U-type bracket to adjust different angles easily.
- Bowens-mount enables to install various of accessories conveniently.
- Large and clear LCD display.
- Excellent heat dissipation.



Built-in Godox 2.4G wireless receiver (X system), compatible with Canon, Nikon, Sony, Fuji, Panasonic, Olympus and Pentax cameras.



Light Effect Contrast in LED Mode(100%) and Flash Mode(1/1):
(ISO:400 Aperture:F8)



Tech Specs

High Speed Sync Flash LED Light	FV150	FV200
Power Supply	100~240V(50/60Hz)	
Power	150W	200W
Color Temperature	5600±200K	
100% Light Brightness(LUX, 1m)	≈12000	≈18000
CRI(≈)	96	
TLCI(≈)	96	
Light Brightness Range of LED Mode	0%-100%	
Operation Temperature	-10°~45°C	
Power Output	1/16-1/1 or 6.0-10.0	
Channel	32	
Group	16(A,B,C,D,E,F,O-9)	
Dimension	34*20*16cm	36.7*20*16cm
(not included a standard reflector)		
Net Weight	3.13Kg	3.33Kg



LF308Bi



LF308D

Flash Mode

The Brightness of Flash is 3 Times of LED's

1/8-1/1 or 7.0-10.0 Power Output

Godox Wireless X System

LED Mode

Soft Light Effects

0-100% Precise Brightness Adjustment

Li-ion & AC Power Supply

Featured with wireless group control and brightness adjustment with high lighting, LF308 fits various professional shooting occasions: wedding, journalistic and object video photography.

Key Features

- As a Flash**

 - The light is 3 times brighter when used as flash than when used as a led light.
 - 1/8-1/1 or 7.0-10.0 power output displayed in the form of fractions or decimal.
 - The modeling lamp's light brightness can be adjusted from 0% to 100%.
- As a LED Light**

 - 308 beads offers high brightness and stable light source.
 - 0%-100% precise brightness adjustment.
 - For the daylight version, the color temperature is fixed at 5600K. For the bicolor version, the color temperature is adjustable between 3300K and 5600K.

Tech Specs


LED Flash Light	LF308D Daylight Version	LF308Bi Bicolor Version
Lithium Battery	7.4V Lithium Battery (SONY NP-F970 model lithium battery) (sold separately)	
DC Power Supply	6.5-12V 4A	
Channel	32	
Group	6 groups(A, B, C, D, E, F)	
Power	Max. 18W	
Color Temperature	5600K±300K	3300K~5600K±300K
Brightness (LUX)	LUX≤1300 (1m)	LUX≤1200 (1m)
Light Brightness Range	10%~100%	
Power Output Control	OF, 7.0-10(1/8-1/1)	
Triggering Method	Sync cord, test button, 2.4G wireless, Bluetooth	
LED Beads	308	308
Quantity	(5600K:154/3300K:154)	
Operation Temperature	-10~50°C	
Dimension	180*185*40mm (not with the Handle)	
Net Weight	400g	

RGBWW TUBE LIGHTS

Photographer: LVN Studio

RGBWW Tube Light

TL30

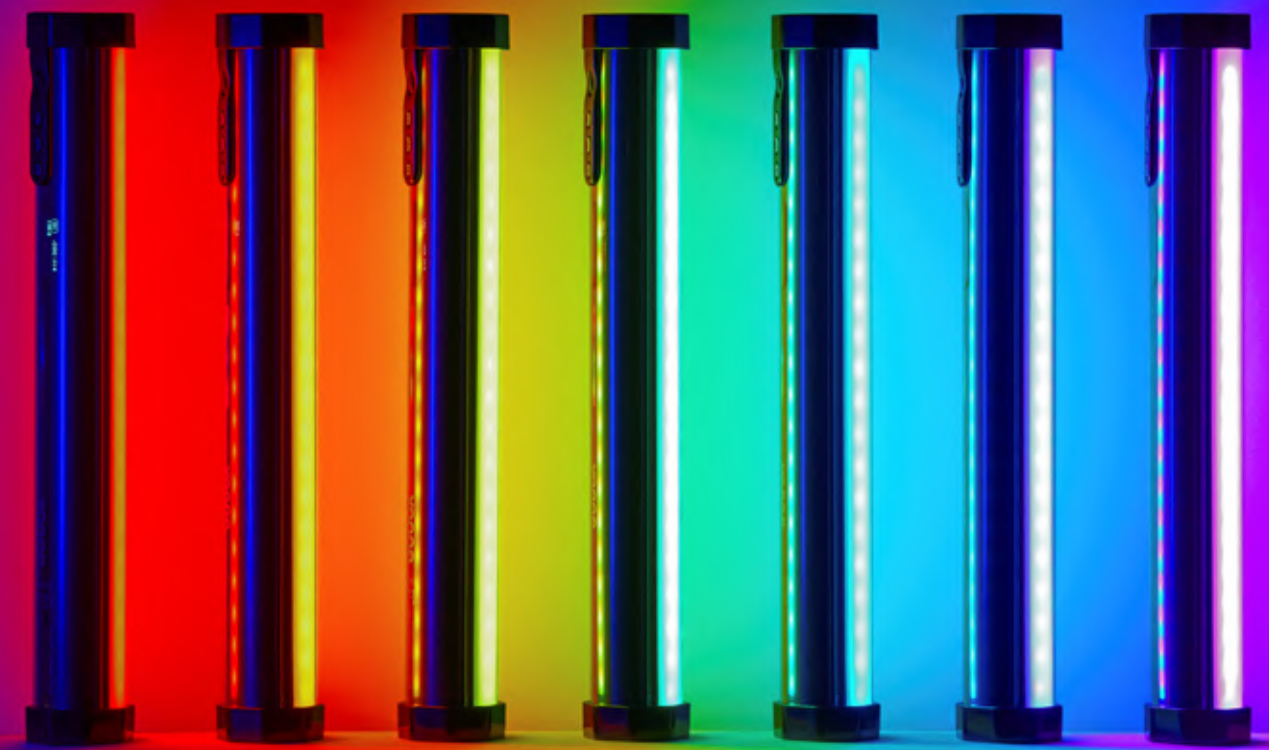

A new addition to Godox tube light family, TL30. Featuring tube shape in light weight, it is portable and easy to use. Small as it is, great potentials to expect. Tons of colors in control for dynamic content creating. Accessories like various couplers, waterproof bag, grid inspire extensive possibilities for the form, effect and even applicable environment of this light. You will enjoy the infinity that TL30 could be to enrich every shot.


Key Features

- RGBWW, CCT, HSI modes
- 36,000 Colors
- 13 Tunable effects
- Advanced Green/Magenta adjustment
- Bluetooth control with Godox Light App
- USB-C charging port
- Integrated lithium-ion battery, 3.6V/2900mAh/10.7Wh
- Embedded magnetic mounts


Abundant functions for various scenarios



TL-M8 8-light coupler



TL-M22-light coupler



TL-W30 Waterproof bag



TL-G30 Grid



TL60



RGBWW
Adding Additional
Two LED Whites



HSI
Fully Control for up
to 36000 Colors



Gel
40 Built-in R-Gel
and L-Gel Filters



CCT
Wide Color Temperature
From 2700K-6500K



FX
39 FX
Effects

Godox Tube light TL60 it's designed to give users the freedom to inspire their creativity for endless range of shooting scenarios, like film making, video and photography in anywhere you go. With multiple color modes, CRI 96 and TLCI 98, ultra smart control system, and flexible tube design, TL 60 enables variety lighting setups to represent impressive performance on highly explore creativity, carry out high efficiency shooting and produce memorable magic moments.

Key Features

- Color: 2700-6500K, CRI/TLCI: 96/98
- RGBWW/HSI Control, 40 Built-In Filters
- Battery Has 2-Hour Runtime
- Phone, DMX, 2.4 GHz Wireless Control
- Dims 0-100%, 98-164' Wireless Range
- 32 Channels, 6 Groups
- Power Adapter, DC Cable, Carry Bag



Remote



Godox Light



On-board Control



DMX



Photographer: LVN Studio



No matter you want to put it into different figures, hang on the wall, hold by hand or any other creative usage. It will satisfy with any kinds of shooting scenarios in anywhere. With Godox Light APP, you can freely control multi lights wirelessly.

Tech Specs

LED Light	TL60	TL30
Internal Lithium Battery	14.4V/2600mAh	3.6V/2900mAh/10.7Wh
Adapter	Output 20V 2.4A	5V/2A(optional)
Power	Max.18W	Max.8W
Color Temperature	2700K~6500K	2700K~6500K
Light Brightness Range	0%-100%	0%-100%
RGB Color Gamut	0~360°	0~360°
100% Brightness(LUX)≈	1500	740
CRI(≈)	96	97
TLCI(≈)	98	99
Duration(continuous output in 100% full power in 2700K for 6500K)	Approx 2 hours	Approx. 60 minutes
Control Method	Smartphone APP(for both Android and IOS system)/2.4G wireless/DMX control	Smartphone APP /
Control Distance	Bluetooth Wireless≈30m 2.4G Wireless≈50(with optional RC-R9 remote control)	Bluetooth Wireless≈30m /
Operating Temperature	-10 to 40°C	-10 to 40°C
Dimension	φ48*750mm	φ42*300mm
Net Weight	0.73kg	0.3kg

RGBWW Tube Light

TL30/TL60

TL30-K2 Two Light Kit for TL30

Tube Light TL30	×2
Wrist Strap	×2
Metal Plates	×6
TL-G30 Grid	×2
USB-C Power Cable	×2
TL-C2 Retaining Clip	×2
TL-M2 2-light Coupler	×1
Adhesive Hook & Loop	×6
TL-W30 Waterproof Bag	×2
CB23 Carry Case	×1



TL30-K4 Four Light Kit for TL30

Tube Light TL30	×4
Wrist Strap	×4
TL-G30 Grid	×2
Metal Plates	×12
USB-C Power Cable	×4
TL-C2 Retaining Clip	×4
TL-M2 2-light coupler	×4
TL-M8 8-light coupler	×1
TL-W30 Waterproof Bag	×2
Adhesive Hook & Loop	×12
CB22 Carry Case	×1



TL60-K2 Four Light Kit for TL60

Tube Light TL60	×2
Retaining Clip	×2
Power Adapter	×2
Remote (RC-R9)	×1
DC Power Cable	×2
RJ45 Cable	×2
Wirerope	×4
Fixed base	×2
Toggle clip	×2
CB39 Carrying Bag	×1



TL60-K4 Four Light Kit for TL60

Tube Light TL60	×4
Retaining Clip	×4
Power Adapter	×4
Remote (RC-R9)	×1
DC Power Cable	×4
RJ45 Cable	×4
Wirerope	×8
Fixed base	×4
Toggle clip	×4
CB40 Carrying Bag	×1



RGBWW Tube Light

TL120



Struggle with a shot that fails to display your imagination, or desire for more power to ignite the viewers? You can always find better answers on lights. TL120 gives freedom shaping the visual impacts in any forms, try these stylish tube-shaped lights to draw the scene you want! They can be everywhere, in any forms! To throw some as glaring background practicals, to sketch beautiful rims by single set, or even create powerful arrays by stacking tubes, you may spend a day investigating the limitless ways of how they show up.

Key Features

- 117cm long, light wider with more power
- Simple elegant tube shape makes them perfect for structuring spatial depth on screen
- Full feature settings on RGB, HIS, CCT, Gel and FX, by one tap on the App you create exciting collision of colors, adding rich dynamics and visual power to build your scene to a rousing climax
- TL120 can be easily controlled on Godox Light App, RC-R9 remote, or DMX controller
- Clear reading screen and easy on-board function setting, TL120 ensures a smooth usage as well as speedy adjusting
- Inbuilt battery lasts more than 150 minutes even at full power output



RGBWW Tube Light

TL120

Tech Specs

LED Light	TL120
Built-in Lithium Battery	14.4V/5200mAh/74.88Wh
Adapter	20V/4.8A
Output Power	30W
Channel	32
Group	6 (A B C D E F)
Color Temperature Range	2700K~6500K
Light Brightness Range	0%~100%
RGB Color Gamut	0 ~ 360°
CRI (≈)	96
TLCI (≈)	98
Duration(continuous output in 100% full power in 2700K or 6500K)	150 minutes
Control Method	Smartphone APP/2.4G wireless/DMX control
Bluetooth Wireless Control Distance	≈30m
2.4G Wireless Control Distance	≈50m (with optional RC-R9 remote control)
Operation Temperature	-10~40 °C
Dimension	48*1170mm
Net Weight	1.27kg

CCT	Illumination Unit	1m	2m	3m
2800K	lux	659	202	101
	fc	61.2	18.8	9.4
3200K	lux	610	187	93.3
	fc	56.7	17.4	8.7
4300K	lux	666	205	102
	fc	61.9	19	9.5
5600K	lux	685	210	104
	fc	63.7	19.5	9.7
6500K	lux	769	234	117
	fc	71.3	21.7	10.9



Optional Purchase

TL-G120
Grid

LSA-18
Adapter Holder

TL-B2
2-light Bracket

TL-B4
4-light Bracket

TL-B8
8-light Bracket

TL120-K4

Light Body	x4
5m Power Cord	x4
Adapter	x4
RJ45 Cable	x4
Clip	x8
Steel Cable	x8
Adapter Holder	x4
Remote control RC-R9	x1
Carry Bag CB47	x1

RGBWW Tube Light

TL180



Low-profile, self-contained and portable, TL180 is a 180cm full RGBWW tube light designed to benefit filmmakers, content creators, videographers and photographers. As the latest member of Godox tube light TL series, it's longer, more powerful and with a larger light-emitting area, giving more liberty to your creation.

Key Features

- 180cm in length, more powerful with a larger light-emitting area
- Adjustable hue, saturation, intensity
- 40 preset color gels
- CRI≈96 TLCI≈98
- Color temperature ranging from 2700K to 6500K
- 14 kinds of preset light effects and each involves 2-3 modes
- Easily controlled by Godox Light App, RC-R9 remote, or DMX controller
- Powered by AC adapter or built-in lithium battery
- Up to 160-minute runtime with 100% brightness on a full charge



Optional Purchase



TL180-B2
Two-light Bracket Kit



TL180-B4
Four-light Bracket Kit



TL-G180
Grid for TL180

Tech Specs


LED Light	TL180
Built-in Lithium Battery	14.4V/9000mAh/129.6Wh
Adapter	20V/5.5A
Power	Max.55W
Duration(continuous output in 100% full power)≈	160 minutes
Channel	32
Group	6 (A B C D E F)
Color Temperature Range	2700K~6500K
Light Brightness Range	0%~100%
RGB Color Gamut	0 ~ 360°
CRI (≈)	96
TLCl (≈)	98
Control Method	Smartphone APP/2.4G Wireless/DMX Control
Bluetooth Wireless Control Distance	≈30m
2.4G Wireless Control Distance	≈50m (with optional RC-R9 remote control)
Operation Temperature	-10~40 °C
Dimension	51*1800mm
Net Weight	2.21kg

Illuminance Data

CCT	Illumination Unit	1m	2m	3m
2700K	lux	776	253	145
	fc	72.1	23.5	13.5
3200K	lux	672	234	125
	fc	92.7	21.8	11.6
4300K	lux	687	240	128
	fc	63.8	22.3	11.9
5600K	lux	729	254	136
	fc	67.8	23.6	12.6
6500K	lux	895	312	167
	fc	83.2	29	15.5








1580Lux(R)
5600k@1m

CRI
95+


CRI 95+

CRI
96+


TLCI 96+




Compact Design




Replaceable
Battery Handle




Barndoor




2500K-8500K



Multiple Color
Modes



11FX/15FX
Effects




Godox Light App

Featuring a replaceable battery handle, the LC500mini/LC500 Rmini excels in outdoor shooting endurance. Compact at 1.5 feet and about 1.2 pounds, it's highly portable. The optical lens design enables 1580 lux at 20 watts. Discover a new level of portable brilliance with the LC500mini/LC500Rmini.

Key Features

- Battery Grip Convenience
- Compact at 1.5 feet and about 1.2 pounds
- 1580 Lux from 20W
- 2,500K-8,500K Color Temperature
- Shape Light with Barndoor
- 11 built-in FX effects
- APP Control

Optional Purchase

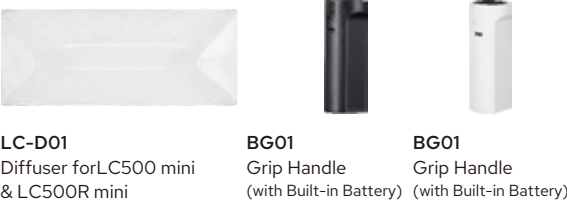

Tech Specs

Model	LC500mini	LC500Rmini
Built-in Lithium Battery	7.2V=2470mAh	
Battery Life	Longest battery life	Longest battery life
(at 100% brightness, 5600K)	≈45min	≈50min
Type-C Input	5V=2A 9V=2A 12V=2A	
Charging time	≈1 hour 25 minutes(12V=2A)	
Input Power	Max.≈20W	
CCT	2500-8500K	
Brightness Range	0%~100%	
FX Type	11	15
CRI	Average≥95	
TLCI	Average≥96	
Control Method	Bluetooth Control/Light Body Control	
Bluetooth Control Distance	Max. 30m	
Working Environment Temperature	-10℃ ~+40℃	
Dimension (Including Grip Handle)	1.69"*1.73"*18"	
Net Weight≈	548g	559g



Key Features for LC500R


- Freely switch LED bicolor mode, colorful light mode and 39 situational special effects modes
- Easy to adjust color temperature, light brightness, hue and color saturation
- Wireless remote control (optional) offers great convenience
- With easy operation and wide application

Key Features for LC500

- With high color rendering index(CRI>95, TLCI≥95) and even illumination to present the objects authentically.
- Freely choose cold or warm color temperature. And the light brightness can be adjusted from 10% to 100%.
- Built-in lithium battery with long-lasting power supply.
- Optional remote control to wirelessly(6 groups & 16 channels) adjust the light for convenient shooting.
- Lightweight, portable and widely applicable.

Tech Specs

LED Light	LC500	LC500R
Built-in Lithium Battery	14.8V/2600mAh	14.4V/2600mAh
Power	Max.18W	Max.23W
Color Temperature	3300K±300K/6500K±300K	2500K~8500K
Channel	16	32
Group	6(A, B, C, D, E, F)	6(A, B, C, D, E, F)
Light Brightness Range	0%~100%	10%~100%
RGB Color Gamut	N/A	0~360°
100% Brightness(LUX)≈	1200(1m)	Max. 5800
CRI(≈)	≥95	96
TLCI(≈)	>95	98
Duration(continuous output in 100% full power)	N/A	Approx. 90 minutes
Operating Temperature	-10 to 45°C	-10 to 45°C
Dimension	565*56*56mm	616*56*56mm
	(reflector is not included)	
Net Weight	760g	0.81kg

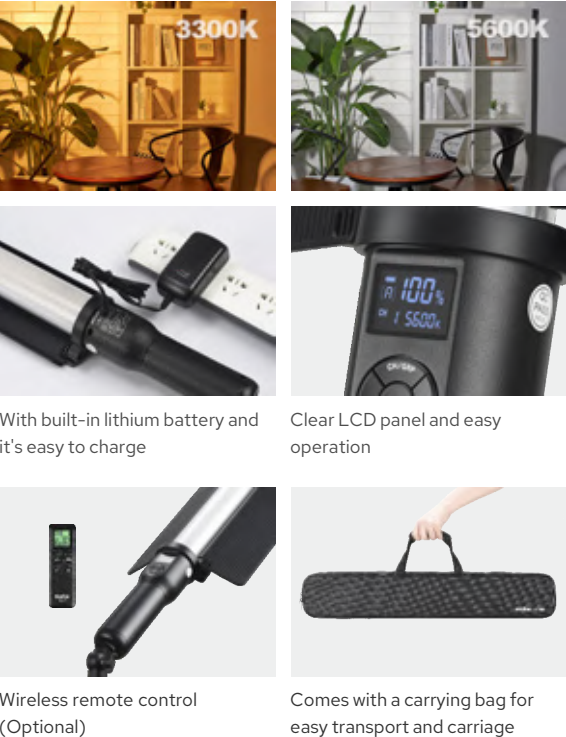



LC1000R

POWER
100_w

100W Output



Multiple
Color Modes



Smooth
Soft Lighting



Versatile
Power Options



LC1000Bi

Introducing the LC1000Bi/LC1000R LED Light Stick—with powerful illumination, delivering impressive brightness at 100W in P mode. Ignite creativity with dynamic RGB colors and enjoy smooth, professional-quality lighting for various settings. Versatile power options ensure user-friendly operation in any environment, keeping you charged. Transform scenes with 11/15 built-in FX effects, perfectly synchronized with music. Elevate your video-shooting game today!

Key Features

- Powerful Lighting Output
- Dazzling Creations with Dynamic RGB Colors
- Smooth & Pro-Quality Illumination
- Designed for Effortless Handling
- Long Battery Life (Normal mode:Max.≈59min, P mode:Max.≈28min)
- Multiple Charging Options
- 11/15 built-in FX effects
- 2500K-8500K
- Easily Controlled via Device or App
- TLCI 96+ and CRI 96+



Optional Purchase



Grid

Tech Specs

Model	LC1000R	LC1000Bi
Built-in Lithium Battery	21.6V/ 2600m Ah 56.16Wh	
Battery Life(at 100% brightness, 5600K)	Normal mode:Max.≈59min, P mode:Max.≈28min	Normal mode:Max.≈49min, P mode:Max.≈27min
Type-C Input	5V/9V/12V/15V/20V100W(Max.)	
DC Input	20V = 6A	
Input Power	Normal Mode:Max.≈65W, P mode:Max.≈100W	
CCT	2500-8500K	
Brightness Range	0%~100%	
FX Type	15	11
CRI	Average≥96	
TLCI	Average≥96	
Control Method	Bluetooth Control/ Light Body Control	
Bluetooth Control	Max. 30m	
Distance		
Working Environment	-10°C ~+40°C	
Temperature		
Dimension	2.2"*21.97"*1.89"	
(Including Grip Handle)		
Net Weight≈	1kg	

Dive Lights

WT25D/WT40D/WT60D
WT25R/WT40R/WT60R (RGBWW)



Dive Lights

WT25D/WT40D/WT60D
WT25R/WT40R/WT60R (RGBWW)



WT25D WT25R WT40D WT40R WT60D WT60R

The diving lights bring a completely new way to light up underwater, even at 40m. Rarely found in traditional dive lights, they are tube-like in shape easily to be adjusted for different lighting angles for your desired effects. The unique shape makes it feasible to illuminate a wider area, discovering more wonders beneath the sea. The light it produces is remarkably smooth, adding a dreamlike atmosphere when applied to underwater portraits.

Key Features

- Offer exceptional water resistance and can perform at a professional level even when submerged up to 40m.
- Switch to high power automatically when submerged, offering more brightness.
- Equipped with a fluorescent button for easy on/off, mode changes, color adjustments, and other actions.
- The tube design creates a diffused and evenly distributed light.
- Standby time of up to 2 hours (WT60R/WT60D) at their maximum brightness in underwater mode.

Dive Lights

WT25D/WT40D/WT60D
WT25R/WT40R/WT60R(RGBWW)



Optional Purchase



Light clamp WT-C01

Tech Specs

Model	WT25D	WT40D	WT60D
Power supply	5V/2.5A, 9V/1.5A, 12V/1A, 15V/0.8A, 20V/0.75A	5V/3A, 9V/3A, 12V/3A, 15V/2.7A, 20V/2A	20V/3.25A
Power underwater	Max. 24W	Max. 54W	Max. 70w
Power abovewater	Max. 10w	Max. 13w	Max. 21W
Charging port	Type-C	Type-C	DC input port
CCT	5600K±300K	5600K±300K	5600K±300K
TLCI	≥96	≥96	≥96
CRI	≥96	≥96	≥96
Brightness adjustment range	0%-100%	0%-100%	0%-100%
Waterproof rate	IP68 (40 meters underwater)	IP68 (40 meters underwater)	IP68 (40 meters underwater)
Charging time	2h at the soonest	2h20min at the soonest	2h40min at the soonest
Battery life (100% brightness)	≈1h (underwater)	≈1h20min (underwater)	≈2h (underwater)
	≈2h20min (abovewater)	≈5h30min (abovewater)	≈6h (abovewater)
Control Method	Bluetooth APP control	Bluetooth APP control	Bluetooth APP control
Bluetooth control distance	≈25m (only abovewater)	≈25m (only abovewater)	≈25m (only abovewater)
Working environment temperature	-10℃~40℃	-10℃~40℃	-10℃~40℃
Dimension	57*52*250mm	57*52*380mm	57*52*640mm
Net weight	0.64kg	1.08kg	1.9kg


Dive Lights

WT25D/WT40D/WT60D
WT25R/WT40R/WT60R(RGBWW)



Tech Specs

Model	WT25R	WT40R	WT60R
Power supply	5V/2.5A, 9V/1.5A, 12V/1A, 15V/0.8A, 20V/0.75A	5V/3A, 9V/3A, 12V/3A, 15V/2.7A, 20V/2A	20V/3.25A
Power underwater	Max. 20W	Max. 55W	Max. 77w
Power abovewater	Max. 7w	Max. 15w	Max. 14W
Charging port	Type-C	Type-C	DC input port
CCT	1800K-10000K	1800K-10000K	1800K-10000K
TLCI	≥96	≥96	≥96
CRI	≥96	≥96	≥96
Brightness adjustment range	0%-100%	0%-100%	0%-100%
Mode	CCT Mode/HSI Mode/	CCT Mode/HSI Mode/	CCT Mode/HSI Mode/
	RGBW Mode/GEL Mode/FX Mode	RGBW Mode/GEL Mode/FX Mode	RGBW Mode/GEL Mode/FX Mode
Waterproof rate	IP68 (40 meters underwater)	IP68 (40 meters underwater)	IP68 (40 meters underwater)
Charging time	2h 10min at the soonest	2h 20min at the soonest	2h at the soonest
Battery life (100% brightness)	≈1h (underwater)	≈1.5h (underwater)	≈2h (underwater)
	≈3h (abovewater)	≈5.8h (abovewater)	≈10h (abovewater)
Control Method	Bluetooth APP control	Bluetooth APP control	Bluetooth APP control
Bluetooth control distance	≈25m (only abovewater)	≈25m (only abovewater)	≈25m (only abovewater)
Working environment temperature	-10℃~40℃	-10℃~40℃	-10℃~40℃
Dimension	57*53*250mm	57*53*380mm	57*53*640mm
Net weight	0.66kg	1.1kg	1.9kg

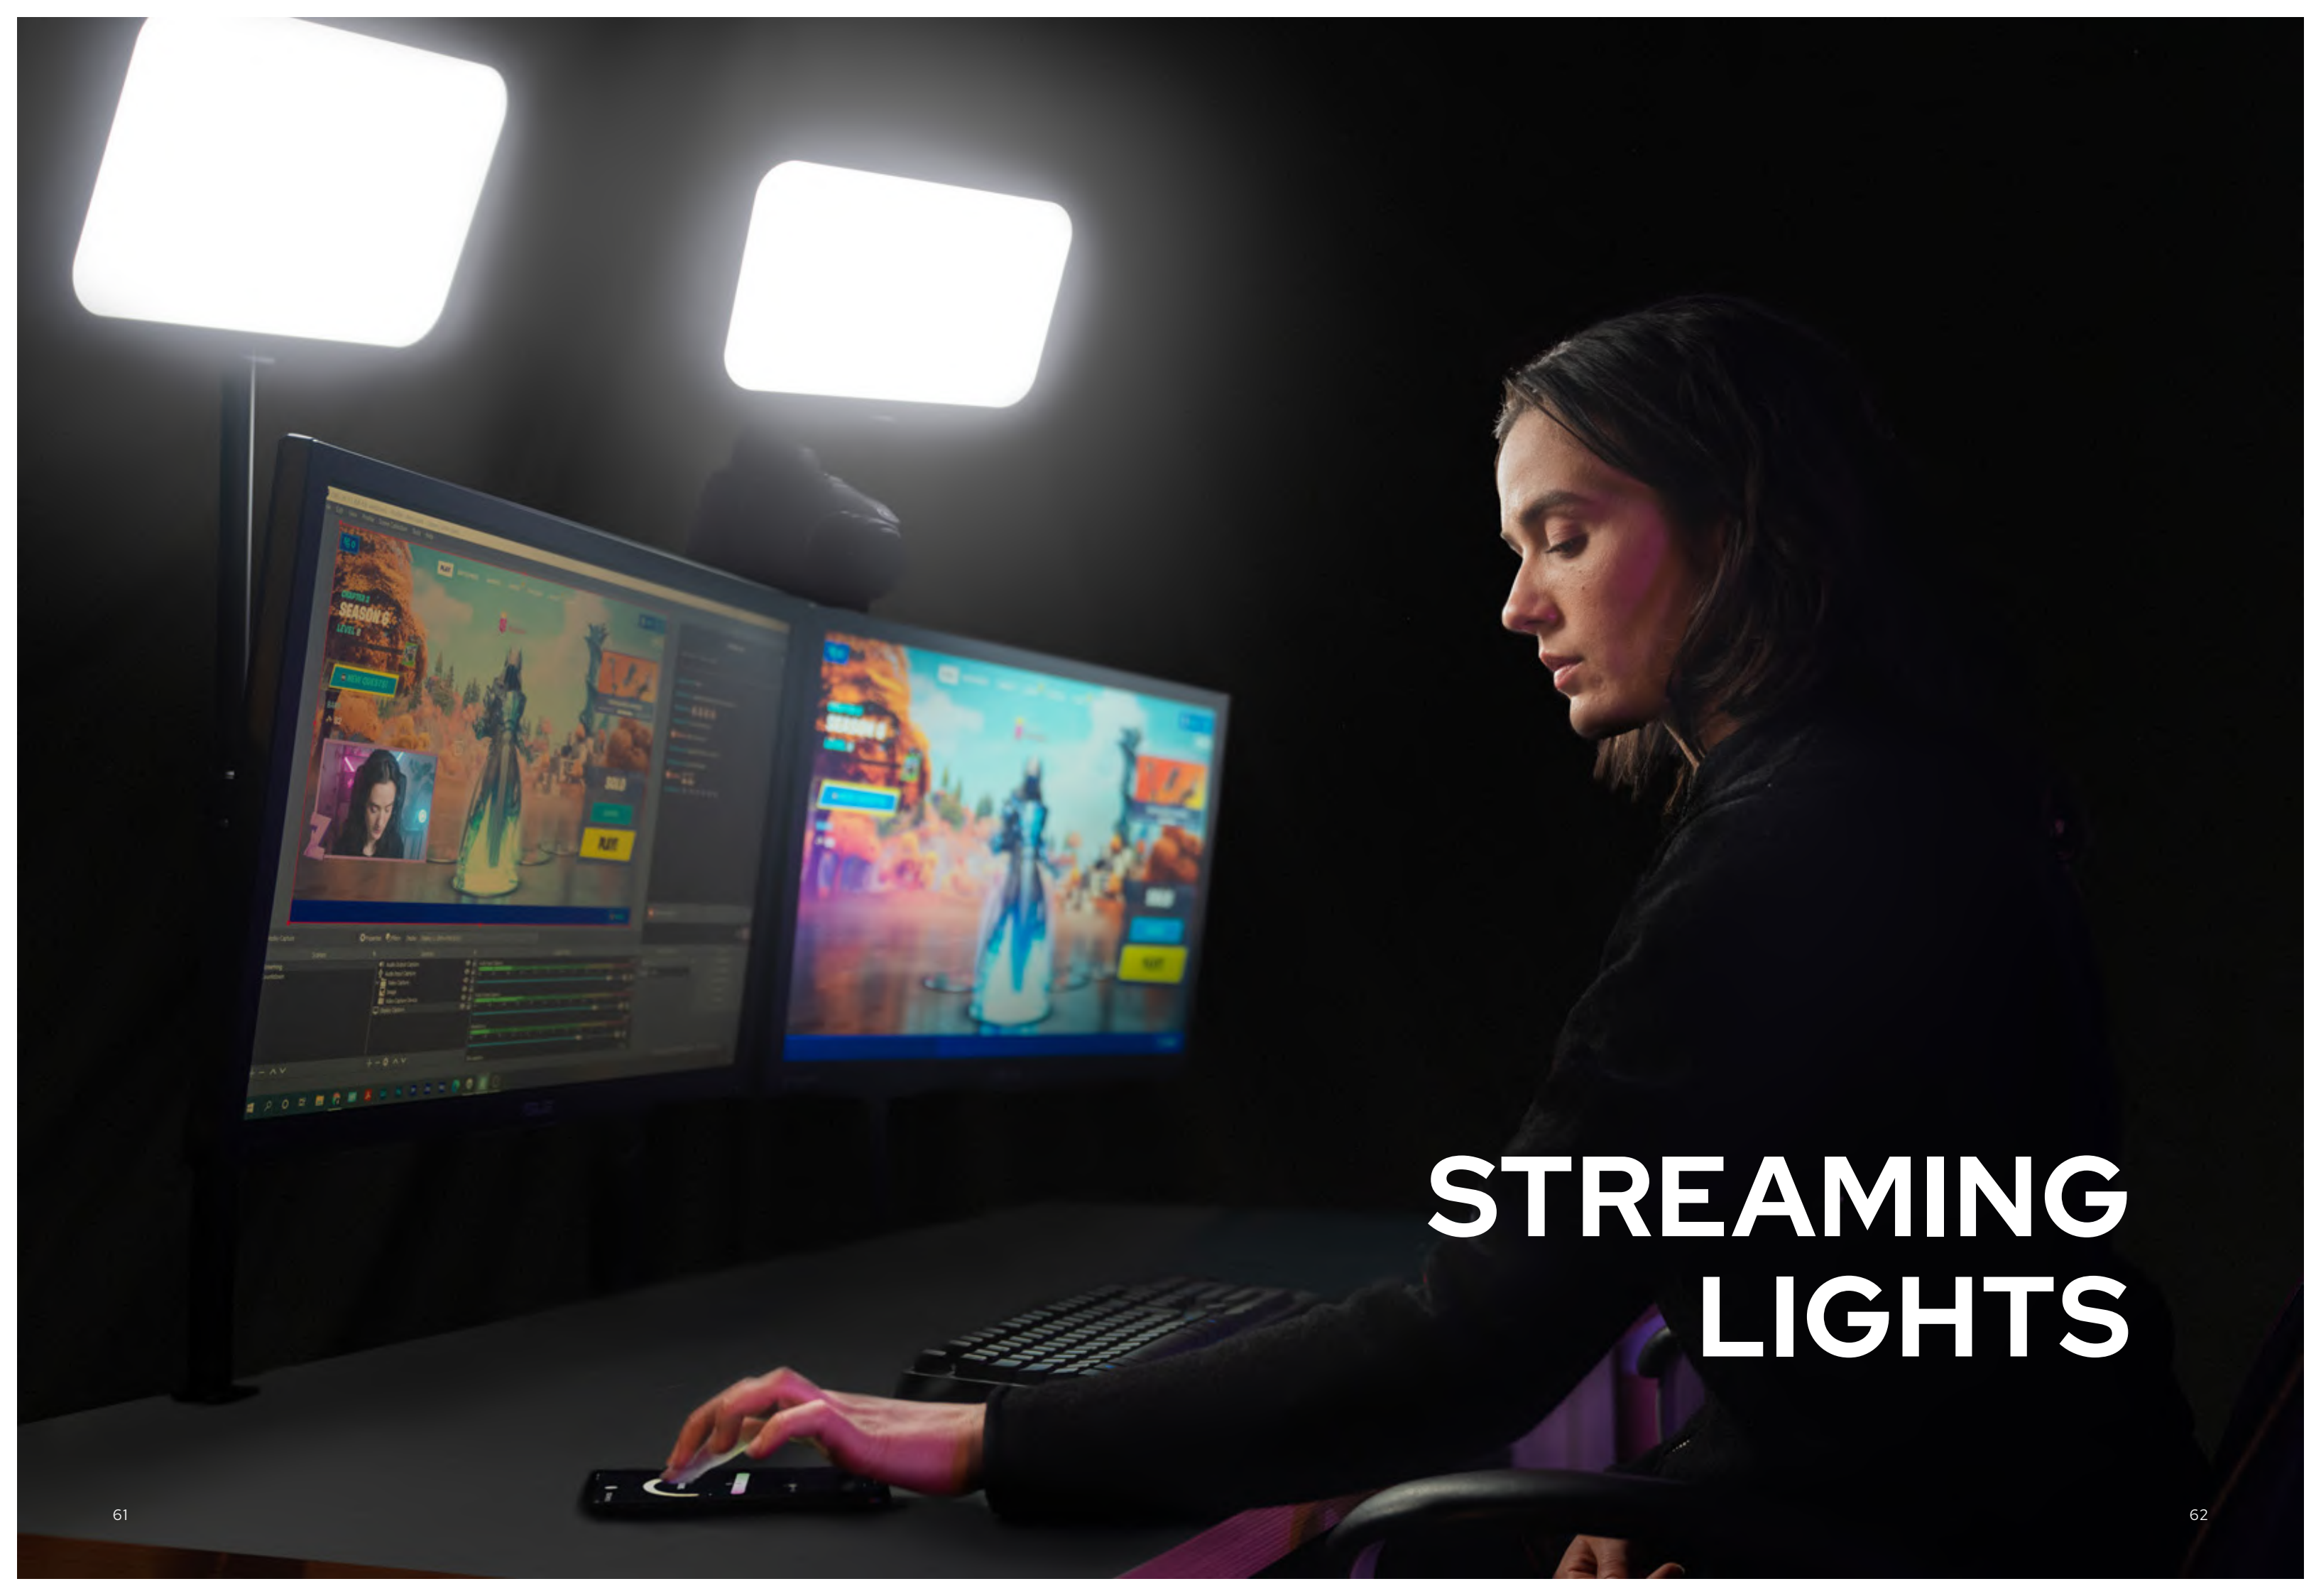

STREAMING LIGHTS



ES30



Want to get started in e-sports streaming but don't know how to look professional to the audience? Find your answer on ES30. Portable and affordable with super soft illumination, it reduces the harsh shadow on your face and creates a glowing look, making your channel stand out from the mundane mass of others.

Key Features

- Ultra-soft lighting with edge-lit technology
- Gentle on the eyes
- Brightness stepless adjustment from 0-100%
- Color temperature adjustable from 2800k-6500k
- No fan, no fan noises, good for streaming
- Godox Light APP control available
- Slim body suitable for narrow space
- Selectable between desktop stand and desk-mount clamp

ES30 Kit 1

- Light Body x1
- Adapter x1
- Power Cable x1
- Telescopic Desk Mount Stand x1



ES30 Kit 2

- Light Body x1
- Adapter x1
- Power Cable x1
- Telescopic Desktop Stand x1



Tech Specs

Model	ES30
Adapter Input	100-240V~50/60Hz 1.0A
Adapter Output	14V=2.5A
Power	Max.35W
CCT	2800-6500K
CRI	96+
TLCI	97+
Brightness Range	0~100%
Control Method	Light body control/Bluetooth control
Working Temperature	-10°C-40°C
Dimension	233*233*42mm
Net weight≈	0.74kg

Illuminance Data

CCT	Illuminance unit	0.5m	1m	2m
2800K	lux	1190	315	87.1
	fc	111	29.3	8
3200K	lux	1510	399	110
	fc	140	37.1	10.2
4300K	lux	2280	602	167
	fc	212	56	15.5
5600K	lux	1550	408	113
	fc	144	37.9	10.5
6500K	lux	1330	350	96.9
	fc	123	32.5	9

All the above tests are based on the condition of 100% brightness

E-sports LED Light

ES45

Designed especially for E-sports streamers, ES45 Kit is built to last with solid metal while keeping incredible slim and space-saving. It is bright enough to illuminate your streaming space yet still comfortably soft to your eyes. Embrace the ES45 Kit and just WOW. You look much more professional than before.

Key Features

- Magnetic Auto-Charging Remote Controller
- Adjust color and brightness with the wireless 2.4 GHz controller. It's detachable from the light and reattaches magnetically to charge.
- IOS/Android Smartphone Control: Godox Light app
- The ES45 renders soft light that is especially flattering to skin tones and complexions, so you'll always look your best.



Photographer: VJUS AS

Tech Specs

Model	ES45 Kit
DC Power Supply by Adapter	Input: 100~240V 50/60Hz 1.3A
	Output: 14.8V 3.42A
Lithium Battery of Operate Panel	3.7V Lithium battery (built-in)
Power	Up to approx.47.6W in max. (color temperature: 4100K)
Channel	32 (1~32)
Group	3(A, B, C)
Color Temperature	2800 ~ 6500K
100% Lumen (lm)	Max.2500
100% Luminosity (lx)	Max.=4100 (darkroom, 0.5m distance)
CRI	≥96
TLCI	≥97
Brightness Range	0~100%
Control Method	Smartphone APP/2.4G Wireless
Quantity of LED Beads	176
Working Environment Temperature	-10~40°C
	367 * 230* 31.04mm (operate panel is not included)
	367 * 230* 45.9mm (operate panel is included)
Weight	1.33KG (operate panel is included)

LED Ring Light

LR120/LR150





LR120



LR150

LED Ring Light LR120/LR150 is suitable for wide occasions e.g. livestream, video, make up, product shooting, etc.



LR120



LR150

Key Features

- Freely adjust color temperature and brightness
- Soft light effects and catchlight
- Easy operation
- Flexible application



Tech Specs

LED Ring Light	LR120	LR150
DC Power Supply	5V/ 2A	24V/ 2A
USB Power Output	/	5V/ 2A
Power	Approx. 10W	Approx. 38W
Color Temperature	3000K-6000K	3000K-6000K
100% Brightness(LUX)0.5m≈	550	1400
Light Brightness Range	0%~100%	1%~100%
CRI	>90	>90
TLCI	>90	>90
LED Beads Quantity	222	336
Operation Temperature	-10~40°C	-10~40°C
Dimension	305*395*35mm	455*555*45mm
	Weight	Black version: 440g Black version: 880g Warning Pink version: 870g



With cold or warm temperature and light brightness adjustment, LED Ring Light LR160 & LR180 is suitable for live, portrait shooting and make up. There are pink version and black version for choice.

Key Features

- Premium LED beads with soft light effects.
- Adjustable light brightness and color temperature.
- DC power supply or lithium batteries (separately sold). Note: LR160 supports DC & lithium batteries power supply while Lr180 only supports DC power supply.
- Included a smartphone holder to offer convenience.



Adjust LR160's color temperature by rotating the knob.




Adjust LR180's color temperature by replacing different light-passing board.



Light brightness adjustment

Tech Specs

LED Ring Light	Lr160	LR180
Lithnium Battery	2*7.4V Lithium battery (NP-F970)(separately sold) /	/
DC Power Supply	16V/1.5A	16.8V/2A
Power	Approx.18W	Approx. 27W
Color	3300K-8000K	Black version: 3300K or 5600K
Temperature		Pink version: 3100K or 5000K
100%Brightness (LUX)(1M)	Below 400 (1 meter)	Black version White light-passing board 600 Yellow light-passing board 400 Pink version White light-passing board 600 Yellow light-passing board 500
CRI(max. brigtness)	≈92	≈92
TLCI(max. brigtness)	≈97	≈97
Light Brightness	10% ~ 100%	Light brightness can be adjusted.
Range		
LED Beads	160	180
Quantity		
Operation	-10°C ~ 40°C	-10°C ~ 40°C
Temperature		
Dimension	49.2* 59*4cm	36.1*46*4cm
Weight	1.21kg	0.88kg (with one light-passing board)

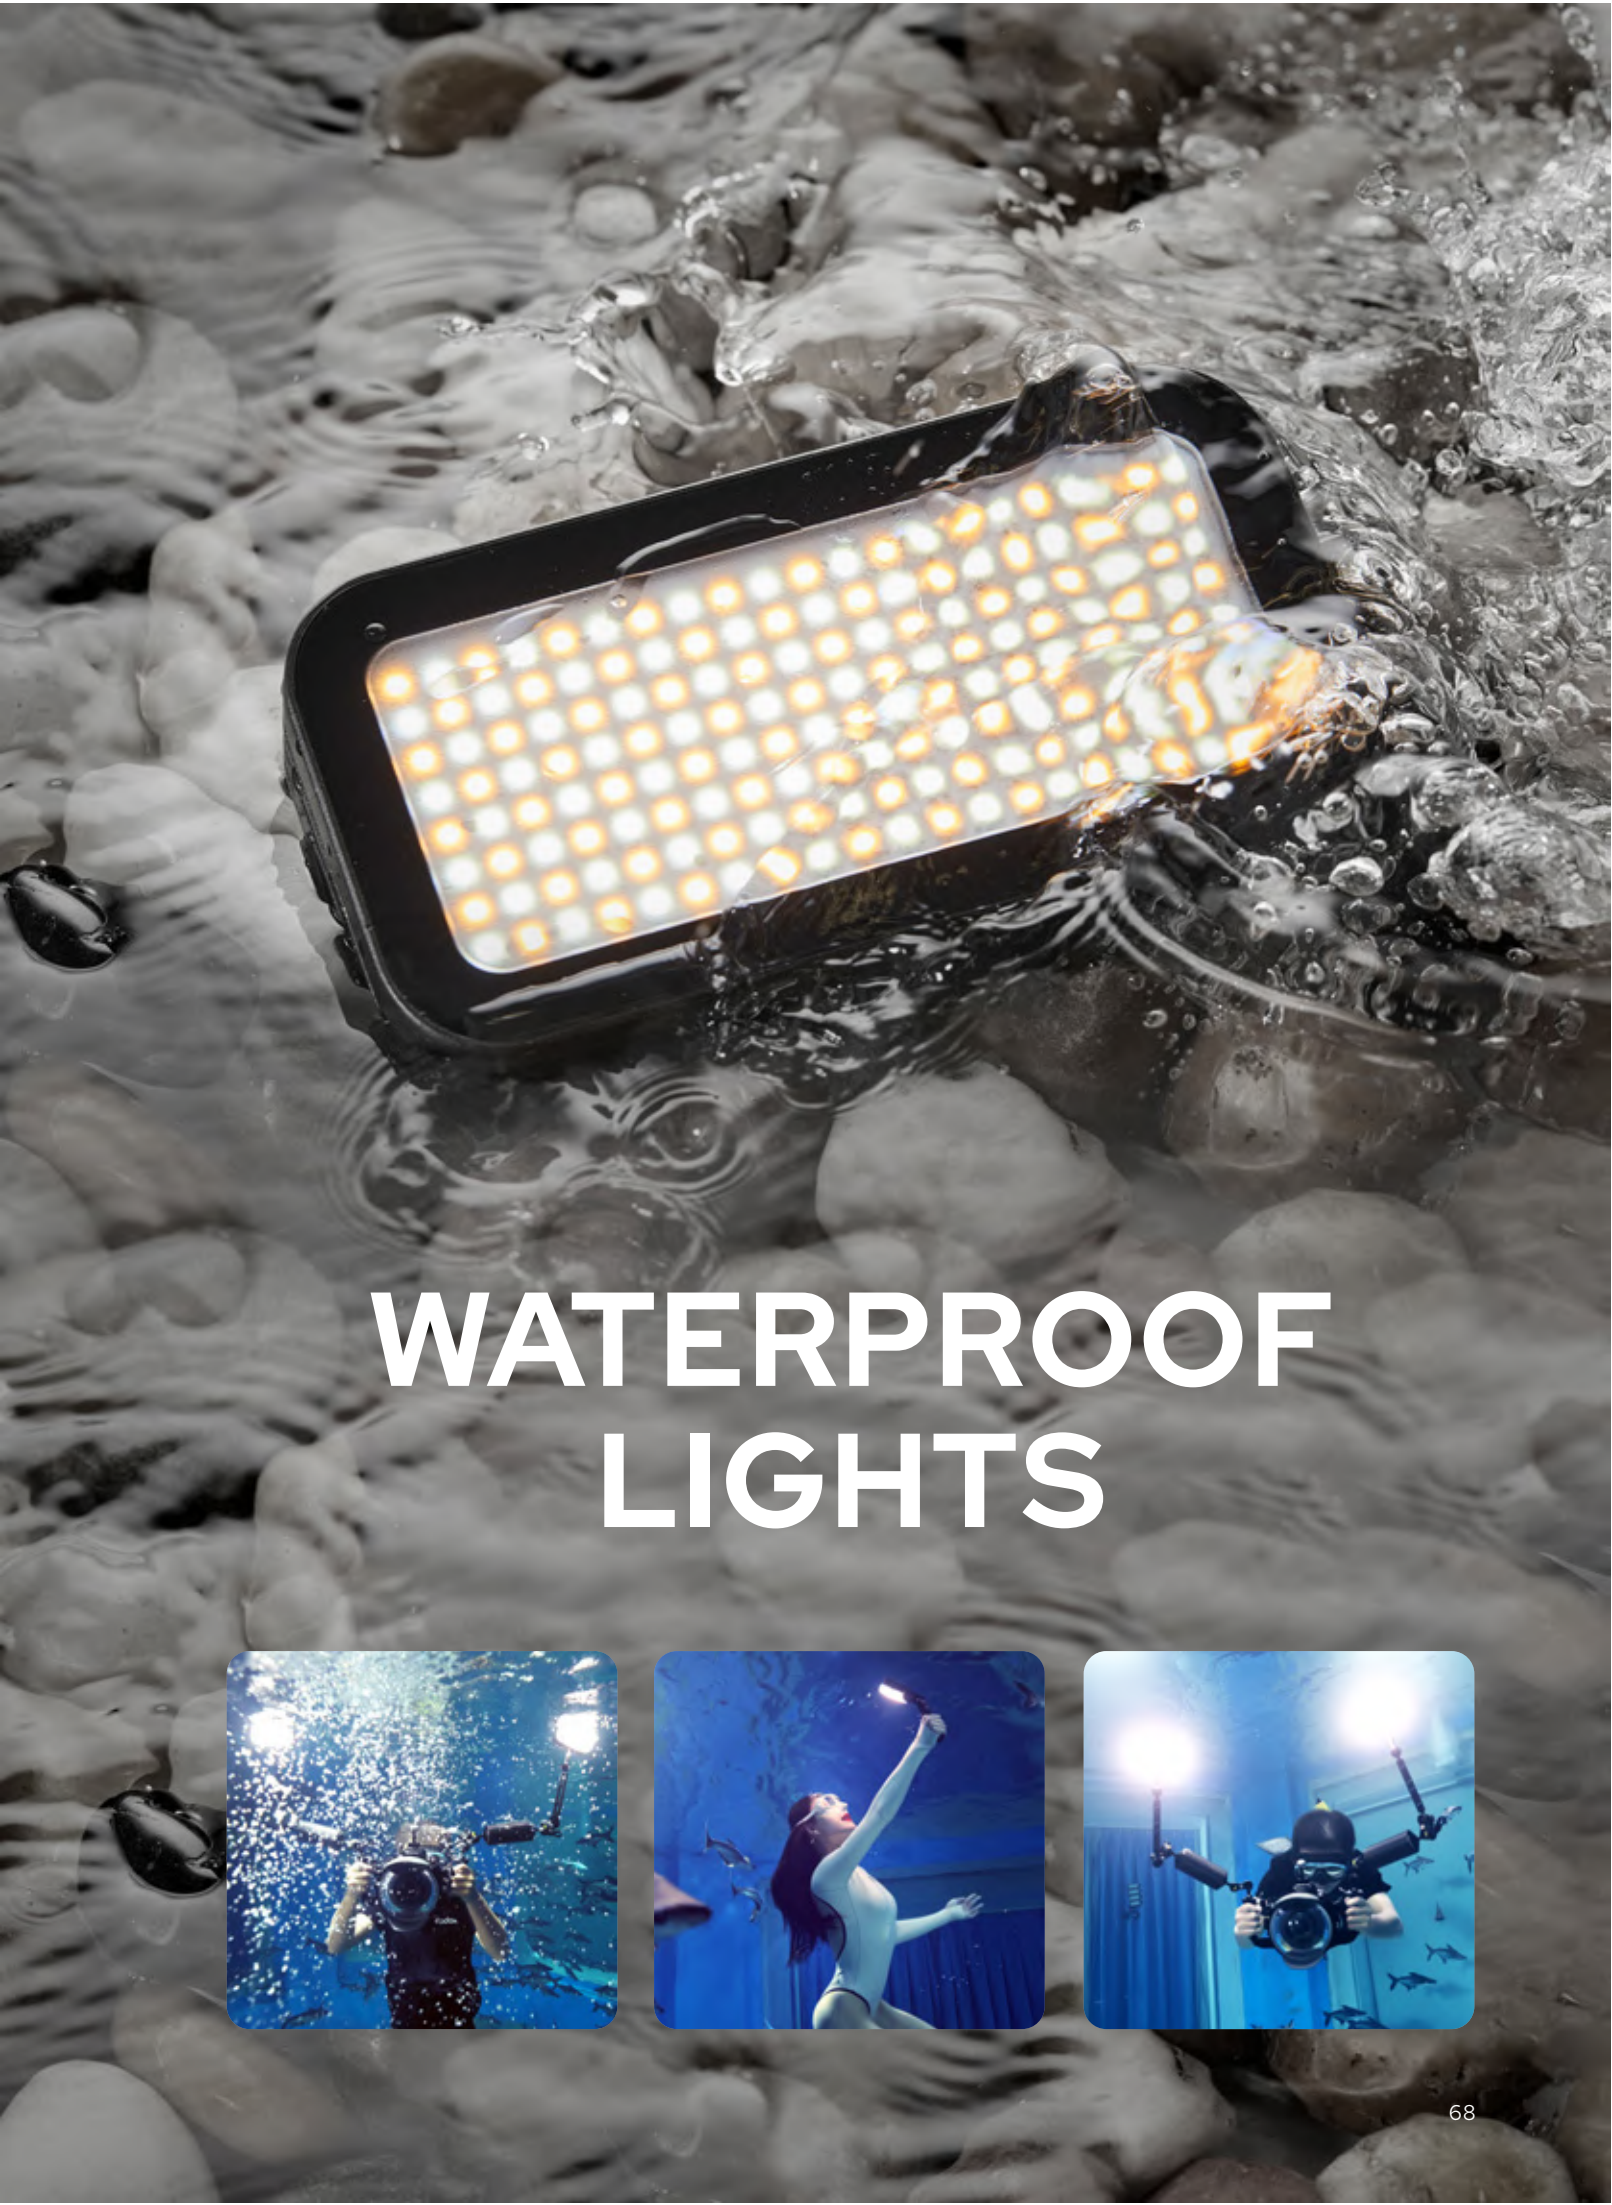

Waterproof Lights

WL4B



WL4B

97

CRI

97

TLCI

IPX8

100ft Waterproof



Magnet Absorption



1/4" Thread Hole



Godox Light App Control

Waterproof Lights

WL8P



WL8P

97

CRI

97

TLCI

IP68

33ft Waterproof



0%-100% Dimmable



1/4" Thread Hole



Godox Light App Control



2700K-8500K

WL4B is a tiny pocket-sized LED light for creators, which enables you to ignite your creation everywhere you go, to light your interview or live stream whenever you need. Waterproof function allows you to explore your journey in various environments. Bring the light with you, any challenge is possible!

Key Features

- A CRI/TLCI rating of 97 and the 55° beam angle make it a powerful light fixture with excellent color rendition
- Wireless control via Godox Light APP supports easy brightness adjustments, FX settings and the other necessary controls
- The fixture supports 13 effects including Lighting, Flash, Broken Bulb, TV, and SOS
- The WL4B is waterproof down to 100ft, which allows you to comfortably use the fixture in wet weather as well as dry, or when submerged
- It incorporates a rechargeable battery that lasts 80 minutes at full brightness, conveniently charging via USB-C cable connecting with your power bank or other power supplies outdoors.





Tech Specs

Model	WL4B
Built-in Lithium Battery	3.8V/1500mA
Power	Max.4W
Waterproof Level	IPX8(30m)
Color Temperature Range	5600K±300K
Max. Illumination (LUX)(0.5m)(≈)	1900
CRI(≈)	97
TLCI(≈)	97
Brightness Range	Low/Medium/High/SOS
Beam Angle	55°
Continuous Usage Time	High brightness≈1 hour and 20 minutes Medium brightness≈2 hours Low brightness≈5 hours and 30 minutes
Standard Charging Power Source	DC5V/2A
Control Method	Smartphone APP
Working Environment Temperature	-10~40°C
Dimension	45*45*47mm
Weight	116g

69

As a pocket-sized LED with rugged metal housing, WL8P is perfect for on-the-go shooting even in tough conditions. Featuring trustful brightness, high color fidelity and adjustable color temperature, the light combines high performance with portability, ready to cope with any wet weather shooting or realize your underwater creativity.

Tech Specs

Model	WL8P
Built-in Lithium Battery	3.7V/2900mAh/10.73Wh
Standard Charging Power Source	DC 5V/2A
Power	10W
Waterproof and Dustproof Grade	IP68(10m)
Color Temperature Range	2700K-8500K
CRI(≈)	96
TLCI(≈)	97
Brightness Range	0%-100%
Photometrics	313 fc / 3370 Lux at 0.98' / 0.3m 116 fc / 1250 Lux at 1.64' / 0.5m 30 fc / 323 Lux at 3.28' / 1m
Bluetooth Transmission Distance on Land	10m
Continuous Working Time	100% brightness≥1h
Control Method	Mobile phone APP
Working Environment Temperature	-10°C-40°C
Dimension	11*5.7*3.25cm
Net Weight	263g

Key Features

- Small and lightweight, easy to carry.
- IP68 rating, resistant to water up to 10m, perfect for waterside vlogging.
- 160 LED beads, dimmable from 0% to 100%, with a wide beam angle.
- Color Accuracy: CRI 96+, TLCI 97+, delivering natural, vibrant light.
- Adjustable Color Temperature: CCT mode (2700K-8500K) for flexible lighting options.
- Creative Light Effects: 8 built-in effects with 3 modes each for dramatic video effects.
- Wireless Control: Remote brightness, color, and FX control via Godox Light App.
- Long Battery Life: 2900mAh lithium battery, 1-hour runtime at full brightness.

70


SMARTPHONE LIGHTINGS



Magnetic Charging Full-Color LED Light

MA5R

MA5R



Wireless
Power Bank



Pocket
Size

220⁺Min

220min+
Runtime



Selfie
Mode



Full
Color

The MA5R is a compact device that combines the versatility of a full-color pocket light with the convenience of a magnetic wireless power bank. Offering reliable charging capabilities and vibrant lighting effects, the MA5R provides an ideal solution for those who need portable, high-quality lighting while capturing moments on the go. Its seamless design ensures effortless use, making it a perfect companion for photographers and content creators.

Key Features

- Pocket light & wireless power bank in one
- Integrated selfie light
- Wide CCT range: 1800K-10000K
- Full color versatility for creative lighting effects
- Compact design with a side thickness of just 13mm for easy portability
- Available in 6 Colors to suit various styles and preferences
- NFC & Bluetooth Connectivity for seamless control via the app



Magnetic Charging Full-Color LED Light

MA5R




Dual-Sided Magnetic Tripod

AM01

AM01



Color Options

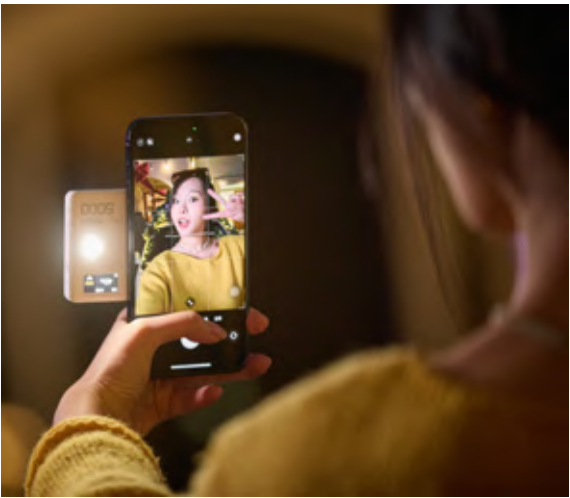

Tech Specs

Model	MA5R
Lithium Battery Parameters	3.7V 4900mAh 18.13Wh
Power	Filling lamp: 5W Selfie lamp: 0.8W
USB-C Charging Port	Input: 5V=3A, 9V=2.22A, 12V=1.67A, 18W(Max.) Output: 5V=3A, 9V=2.22A, 12V=1.67A
Charging Time	≈1h 30min
Working Time	≈3h 40min(100% brightness output) ≈7h 20min(50% brightness output)
CCT	Filling lamp: 1800K-10000K Selfie lamp: 2800K-6500K
GM Adjust	-50~+50
Brightness Range	0%~100%
FX Modes	14
CRI	Filling lamp: average≥95 Selfie lamp: average≥96
TLCI	Filling lamp: average≥97 Selfie lamp: average≥98
Controlling Methods	Bluetooth app/Light Body Control
Bluetooth Controlling	30m
Distance	
Working Environment	-10℃~40℃
Temperature	
Dimension	≈4.21"*2.68"*0.51"
Netweight	≈164g



N52 Magnet



Dual-sided
Attraction



Versatile Usage



Bonus Magnetic
Ring

The AM01 is powered by N52-grade magnets, offering a strong, secure hold for your MA5R or smartphone. Its dual-sided magnets keep your MA5R steady on one side while holding other items firmly on the other. Easily transform it into a magnetic tripod, or mount it to your camera using the cold shoe adapter. Plus, the bonus magnetic ring ensures a reliable connection for sturdy performance.



Key Features

- N52 Magnets
- Dual-Sided Attraction
- A Tripod or Mount on Camera
- Bouns Magnetic Ring
- Foldable and Portable



R1



Round RGBWW Mini Creative Light R1 can change different colors and achieve creative light effects with RGBWW mode, bicolor modes and 39 special effects modes.

Key Features

- This light can change multiple colors to achieve creative light effects. With approx. 98 CRI and 97 TLCI, it can present projects authentically.
- There're 39 different patterns in RGB scene mode, e.g. music, lightning, screen, RGB quick recycle, RGB slow recycle, candlelight, police car, fire truck, ambulance, etc.
- Built-in Lithium Battery and Charge with Type-C USB Port, Freely adjust light brightness from 0% to 100%. It supports continuous work for 1.5 hour in full power.
- Compatible with Various of Accessories and Achieve More Light Effects With magnetic accessory port, this light supports to install AK-R1 round head accessories (separately sold) and achieve creative shooting.
- With built-in magnet, this light can be quickly pasted onto the back of smartphone, which saves a lot of time and energy.

Tech Specs

Model	R1
Built-in Lithium Battery	1800mAh
Power	Max. 5W
Charging power supply	5V1A, 5V2A
Color temperature range	2500K~8500K
100% Illuminance(LUX)(0.5m)(≈)	605
CRI(≈)	98
TLCI(≈)	97
Light brightness range	0%~100%
Duration(continuous output in 100% power)	Approx. 90 Minutes
Operation temperature	-10~45°C
Dimension	Diameter: 75mm; Thickness:23mm
Net weight	150g

M1



With 40 special effects modes, fashion appearance, simple operation and great portability, RGBWW Mini Creative Light M1 is suitable for macro photography, video shooting, microfilm, live, portrait shooting, product shooting, etc.

Key Features

- Freely switch CCT mode, RGB mode and 40 FX special effects modes.
- Easy to adjust color temperature, light brightness, hue and color saturation
- With a dedicated screen to display parameters precisely
- With a universal accumulating bracket to quickly adjust different lighting angles
- With simple operation and light and thin body which offers great portability
- Various of using methods



Tech Specs

Model	M1
Charger(separately sold)	5V2A/18W QC3.0(5V3A,9V2A,12V1.5A)
Power	Max. 13W
Color temperature range	2500K~8500K
Light brightness range	0%~100%
RGB Color gamut	0~360°
100% Illuminance(LUX)	Max. 1700
CRI(≈)	97
TLCI(≈)	97
Bracket rotation angle	Main axis: 360°; Inside axis: 270°
Duration(continuous output in 100% power)	150 Minutes
Operation temperature	-10~45°C
Dimension	145*70*15mm
Net weight	240g



With the light weight and convenient operation, LEDM32 & LEDM150 Mini Light is excellent for all kinds of mobile phones.

Key Features

- High-quality LED bulbs
- Built-in lithium battery
- Soft and even illumination
- Adjustable light brightness
- With the optical control flash fire function
- With a lightweight and portable body
- Fit almost any mobile phones



Tech Specs

LED Light	LEDM32	LEDM150
Built-in Lithium Battery	3.7V/300mAh	3.7V/3000mAh
Power	Max. 1.4W	Max. 9W
Color Temperature	5200K±300K	5600K±300K
Brightness (LUX)	>120(0.5m)	1029(0.5m)
Color Rendering Index	≥95	>95
TLCI	≥94	≥94
Light Brightness Range	10%~100%	10%~100%
LED Beads Quantity	32	150
Operation Temperature	-10~50°C	-10~50°C
Dimension	50*50*28mm	132*80*20mm (not with the L-type Bracket and Mounting Bracket)
Net Weight	30g	170g

LITEMONS

Litemons LED Light

LA600R/LA600Bi



Unleash cinematic brilliance with the 600W Litemons L A600R/Bi. Designed for creators and filmmakers, the L A600R features a 1,800K-10,000K CCT range and full-color tunability, offering endless creative possibilities. The Flat Bowens Mount supports various modifiers, including the Beam ight B60 for parallel beam lighting system. For seamless control, it offers DMX, Bluetooth, NFC, and CRMX via TimoLink RX, ensuring effortless operation.


Key Features

- Full/Bi-color LED COB light
- 600W high power delivers 212,500 Lux@1m with LA600Bi
- Wide CCT range: 1,800-10,000K(R)/2,800-6,500K(Bi)
- Cinema-grade Color Accuracy
- Flat bowens mount compatibility for diverse needs
- DMX & App control support
- NFC tap-to-pair multi-light technology
- Built-in 14 FX effects
- 48V XLR power supply for stable high-output performance

Tech Specs

Model	LA600R	LA600Bi
Power Supply	100V-240V~50/60Hz	
DC Port Input Power	48V-600W(Max.)	
CCT Range	1800K-10000K	2800K-6500K
GM Adjustment	-100%-100%	\
Brightness Range	0%-100%	
FX Modes	14 Types	11 Types
CRI	Average≥95	
TLCI	Average≥95	
Controlling Methods	Wired DMX Control, support RDM protocol/ Bluetooth app/light body control	
Bluetooth Controlling Distance	60m	
USB-A Port	Firmware Upgrade/SV 1.5A Power Supply	
Working Environment Temperature	-20°C~45°C	
Dimension (without reflector) [≈]	10.83"*11.5"*14.76"	
Net Weight (without reflector) [≈]	5.1kg	4.5kg


LA600R/Bi(White Version) ●○

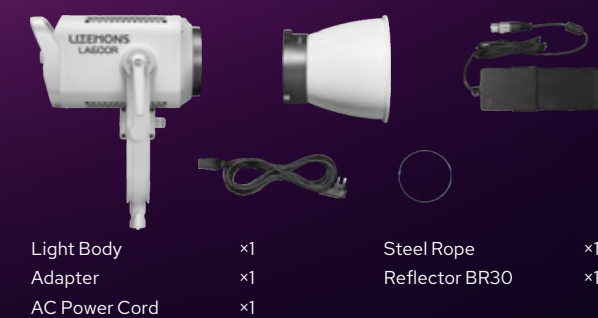

Light Body	×1	Steel Rope	×1
Adapter	×1	Reflector BR30	×1
AC Power Cord	×1		

* Tips: The black version is available for purchase, with identical specifications.

LA600R/Bi K1(White Version) ●○

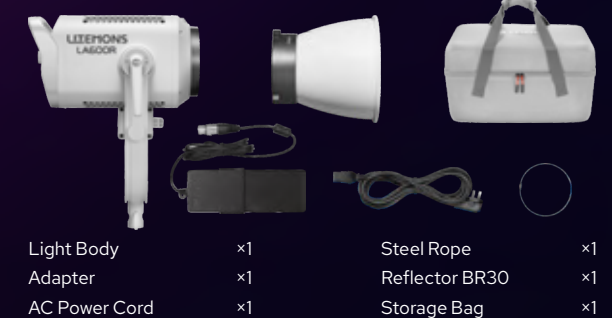

Light Body	×1	Steel Rope	×1
Adapter	×1	Reflector BR30	×1
AC Power Cord	×1	Storage Bag	×1

* Tips: The black version is available for purchase, with identical specifications.

Litemons LED Light

LA150R/LA200R/LA300R/LA300Bi



To meet the demand for versatile RGB lighting in today's dynamic photography and videography landscape, LITEMONS LA150R, LA200R, LA300R, and LA300Bi stand out with a wide CCT range from 1800K to 10000K, delivering exceptional light quality for any creative scenario. Whether for indoor studios or outdoor shoots, they provide the flexibility and performance creators need.

Key Features

- 94,700lux @1m with LA300R
- Wide CCT Range: 1800-10000K (R)/2800-6500K (Bi)
- Professional LED Design Standards by High-end KNOWLED
- NFC Integration for Seamless Workflow with Godox Light App
- DC & V-mount Battery Power Supply
- 3-Light Kit Option
- Wide Compatibility with Bowens Mount



Tech Specs

Model	LA150R	LA200R	LA300R	LA300Bi
Input Power	165W	220W	330W	330W
Power Supply	100V-240V~50/60Hz			
CCT	1800K-10000K			2800K-6500K
GM Adjustment	-100%~100%			/
Brightness Range	0%-100%			
CRI	Average≥95			
TLCI	Average≥94			
Bluetooth Control Distance	Max.30m			
Working Environment	-20°C-40°C			
Temperature				
Dimension (without reflector)	≈9.09*6.14*9.37			
Netweight (without reflector)	≈2.5kg			



Litemons LED Light

LA150R/LA200R/LA300R/LA300Bi



Optional Kit




K1 ○ ●			
Light Body	x1	AC Power Cord	x1
Reflector BR30	x1	Wire Rope	x1
Adapter	x1	Storage Bag	x1



K2 ○ ●			
Light Body	x2	Wire Rope	x2
Reflector Br30	x2	Softbox SB-BW6090	x2
Adapter	x2	Light Stands	x2
AC Power Cord	x2	Storage Bag	x1



K3 ○ ●			
Light Body	x3	Wire Rope	x3
Reflector Br30	x3	Light Stands	x3
Adapter	x3	Storage Bag	x1
AC Power Cord	x3		

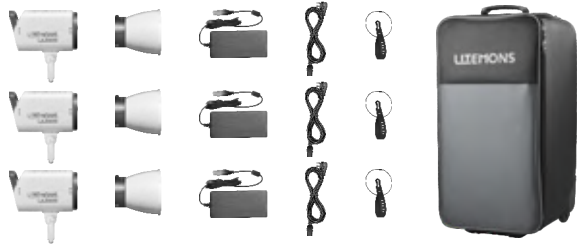

3K ○ ●			
Light Body	x3	AC Power Cord	x3
Reflector Br30	x3	Wire Rope	x3
Adapter	x3	Storage Bag	x1



Godox has launched many successful products and wins the support and admiration of our customers. But the further we go, the more responsibility we feel like taking on to contribute to the development of the industry. Aiming at providing an accessible light solution to whoever wants to start creation, we are excited to introduce the budget-friendly Litemons LA150D/150Bi/200D/200Bi. With different output and daylight/bi-color versions to choose from, the LA series can meet various needs for YouTubers, live streamers, video makers, commercial producers and more.

Key Features

- Compact but powerful, with 101000 lux output at 1meter (LA200D with reflector)
- Stepless brightness adjustment from 0 to 100%
- Bi-colored LA150Bi/LA200Bi is adjustable from 2800-6500K
- High CRI/TLCI rating of 96+/97+ ensures natural and faithful colors
- Godox Light APP available
- LA150D/LA200D features 8 FX light effects, including Flash 1, Flash 2, Flash 3, Storm 1, Storm 2, Storm 3;LA150Bi/LA200Bi adds another three light effects: Candle, Fire and Firework.
- Compatible with any Bowens mount light shapers
- Built-in umbrella mount



LA150D

CCT Distance	Testing Condition	Illuminance Unit	1m	2m	3m
5600K	bare bulb	lux	7030	1860	903
		fc	653	172	83.8
	with reflector	lux	84800	17800	7610
		fc	7880	1650	707

LA200D

CCT Distance	Testing Condition	Illuminance Unit	1m	2m	3m
5600K	bare bulb	lux	8670	2170	1050
		fc	806	201	97.6
	with reflector	lux	101000	20800	8670
		fc	9360	1930	806

LA150Bi

CCT	Testing Condition	Illuminance Unit	1m	2m	3m
2800K	bare bulb	lux	3020	806	409
3200K		fc	281	74.8	38
		lux	3550	947	483
4300K		fc	329	88	44.9
		lux	5030	1350	688
5600K		fc	468	125	63.9
		lux	5080	1360	695
6500K		fc	472	126	64.5
		lux	4400	1180	600
			fc	409	110

LA200Bi

CCT	Testing Condition	Illuminance Unit	1m	2m	3m
2800K	bare bulb	lux	3570	951	478
3200K		fc	331	88.4	44.4
		lux	4350	1160	586
4300K		fc	404	108	54.5
		lux	6850	1840	924
5600K		fc	637	171	85.8
		lux	6970	1870	937
6500K		fc	647	174	87
		lux	5630	1510	774
			fc	523	140

LA150Bi

CCT	Testing Condition	Illuminance Unit	1m	2m	3m
2800K	with reflector	lux	37700	8150	3340
		fc	3500	757	310
3200K		lux	44800	9660	3970
		fc	4170	897	369
4300K		lux	64900	13900	5740
		fc	6030	1290	534
5600K		lux	66600	14400	5890
		fc	6190	1340	547
6500K		lux	58300	12400	5150
		fc	5420	1150	479

LA200Bi

CCT	Testing Condition	Illuminance Unit	1m	2m	3m
2800K	with reflector	lux	39300	8440	3550
		fc	3650	785	330
3200K		lux	48500	10400	4340
		fc	4510	964	403
4300K		lux	77400	16400	6890
		fc	7190	1520	640
5600K		lux	79200	16800	7030
		fc	7360	1560	653
6500K		lux	64300	13600	5670
		fc	5970	1260	527

Tech Specs

Model	LA150D	LA150Bi	LA200D	LA200Bi
Power	Max.190W	Max.190W	Max.230W	Max.230W
Input Voltage	DC 48V	DC 48V	DC 48V	DC 48V
CCT	5600K	2800-6500K	5600K	2800-6500K
Brightness Adjustment Range	0%-100%	0%-100%	0%-100%	0%-100%
CRI≈	96	96	96	96
TLCI≈	97	97	97	97
FX Mode	8	11	8	11
Controlling Method	Manual Control, Bluetooth APP Control	Manual Control, Bluetooth APP Control	Manual Control, Bluetooth APP Control	Manual Control, Bluetooth APP Control
Bluetooth Transmission Distance	30m	30m	30m	30m
Working Environment Temperature	-10℃~40℃	-10℃~40℃	-10℃~40℃	-10℃~40℃
Bluetooth Transmission Frequency	2402.00-2480.00MHZ	2402.00-2480.00MHZ	2402.00-2480.00MHZ	2402.00-2480.00MHZ
Maximum Transmit Power	5dbm	5dbm	5dbm	5dbm
Dimension	205*145*215mm	205*145*215mm	205*145*215mm	205*145*215mm
Net Weight≈	1.4kg	1.4kg	1.4kg	1.4kg

LA Series Accessories

Bowens Mount Softbox




Square Softbox
With Gird: SB-FW-6060/9090
Without Grid: SB-BW-6060/9090

Rectangular Softbox
With Gird: SB-FW-6090/70100/80120
Without Grid: SB-BW-6090/70100/80120

Strip Softbox
With Gird: SB-FW-50130/35160
Without Grid: SB-BW-50130/35160

Octagon Softbox
With Gird: SB-FW-95/120/140
Without Grid: SB-BW-95/120/140

Collapsible Lantern Softbox

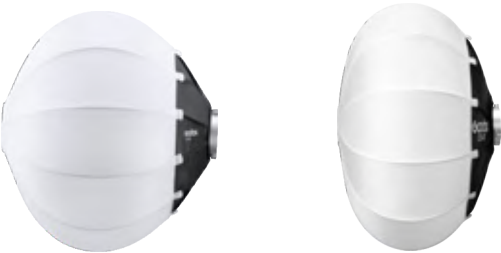

CS-50D/65D/85D

CS-50T/65T/85T

Parabolic Softbox



P90L/90H/120L/120H

Quick Release
Parabolic Softbox



QR-P70/P90/P120

Quick Release
Parabolic Softbox



QR-P60T/P70T/P90T/P120T/P150T

Parabolic Focusing System



P68/88/128/158 Kit

Fresnel



FLS8/FLS10

LA Series Accessories

Projection Attachment

BLP



BLP Projection Attachment
*For LA150D/LA200D/LA150Bi/LA200Bi

BP-SE



BP-SE Projection Attachment
*For LA300R/LA200R/LA150R/LA300Bi

Accessories for BLP&BP-SE



VSA



VSA-19K/26K/36K
*For LA150D/LA200D/LA150Bi/LA200Bi

Accessories for VSA



BP



BP19K/26K/36K
*For LA600Bi/600R/300R/200R/150R/300Bi

Accessories for BP



Accessories for Projection Attachment



Litemons LED Light Panel

LP400R/LP600R/LP1200R
LP400Bi/LP600Bi/LP1200Bi



Meet the LP Series-a versatile lighting solution for creators that delivers soft, high-brightness lighting, a broad color temperature range, and professional modes to ignite your inspiration. Its sleek design, battery power options, and portable carry case make it ideal for both studio and on-the-go use. With the Godox Light App, controlling your lighting is effortless, providing vibrant, high-quality illumination wherever your creativity leads.

Key Features

- Bright & Soft Lighting Results
- Wide CCT Range: 1800-10000K (R)/2800-6500K (Bi)
- Professional Modes: CCT/RGB/HSI/GEL/FX
- Battery Power Option
- Custom-molded Carry Case for Easy Transport
- Stylish Aesthetics in a Compact Design
- 2/3-Light Kit Options
- Flexible for Every Scene
- Seamless Workflow with Godox Light App



Tech Specs

Model	LP400Bi	LP600Bi	LP1200Bi
Input Power	36W	60W	120W
Power Supply	20V=1.8A	20V=3A	20V=6A
CCT	2800-6500K		
GM Adjustment	0%-100%		
CRI	Average≥96		
TLCI	Average≥96		
FX Modes	11		
Controlling Methods	Bluetooth App/On-board		
Bluetooth Control	≥15m		
Distance			
Working Environment	-10°C-35°C		
Temperature			
Dimension	229*201*69.5mm	264*201*69.5mm	401*422*69.5mm
Netweight	855g	985g	1847g


Model	LP400R	LP600R	LP1200R
Input Power	36W	60W	120W
Power Supply	20V=1.8A	20V=3A	20V=6A
CCT	1800-10000K		
GM Adjustment	0%-100%		
CRI	Average≥96		
TLCI	Average≥96		
FX Modes	14		
Controlling Methods	Bluetooth App/On-board		
Bluetooth Control	≥15m		
Distance			
Working Environment	-10°C-35°C		
Temperature			
Dimension	229*201*69.5mm	264*201*69.5mm	401*422*69.5mm
Netweight	855g	985g	1847g

Litemons LED Light Panel

LP400R/LP600R/LP1200R
LP400Bi/LP600Bi/LP1200Bi



Optional Kit

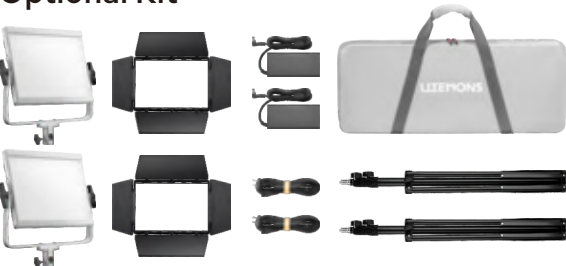

2-light Kit

Light Body(with Yoke)	×2	Barndoors	×2
Adapter	×2	Light Stand	×2
Power Cord	×2	Carry Case	×1



3-light Kit

Light Body(with Yoke)	×3	Barndoors	×3
Adapter	×3	Light Stand	×3
Power Cord	×3	Carry Case	×1

Litemons LED Light Panel

C30Bi/C30R




C30Bi/C30R

Litemons Tabletop LED Light

LC30D/LC30Bi

LC30Bi


LC30D




2200Lux
@1m(5600K)

248g

Lightweight
Design



45-Minute
Runtime



USB
Rechargeable

The C30Bi/R is a compact, pocket-sized panel light with 2200lux brightness at 1 meter and a 5600K color temperature. Weighing only 248g, it's lightweight and portable. Featuring advanced LED beads and Godox's optical lens technology, it ensures excellent light quality. The built-in rechargeable battery offers 45 minutes of full-power runtime and supports charging while in use, making it perfect for on-the-go lighting.



Key Features

- Weighs just 248g, fits in any pocket for ultimate portability
- 30W power with advanced LED beads and optical lens
- 45 minutes of full-power use with charging via Type-C
- CCT: 2800K-6500K (C30Bi)/1800K-10000K (C30R)
- Efficient heat dissipation and low-noise fan
- Compatible with handheld, camera-mounted, or stand-mounted setups via 1/4" threaded hole

Tech Specs

Model	C30Bi
Lithium Battery	DC7.4V 3350mAh 24.8Wh
USB-C Port Input	5V≈3A, 9V≈3A, 12V≈3A
Brightness Range	0%-100%
CCT Range	2800K-6500K
Charging Time	≈2h
Working Time	≈45min(100% brightness output) ≈276min(50% brightness output)
CRI	Average≥94
TLCI	Average≥96
Working Environment Temperature	-10°C~40°C
Bare Light Dimension	≈5.24" *3.07" *1.02"
Bare Light Net Weight	≈248g

Litemons video light series is a set of entry-level tools designed to make your journey of the content creation much easier, a portable, ease-of-use and budget-friendly lighting solutionto which our LED6R/LED6Bi belongs. Small but versatile, the two lights are made for different needs. For creators who'd love to play with colors and try dramatic effects, the RGBWW LED6R won't let you down. Otherwise, try LED6Bi if you only need a simple bi-color solution. Working with camera or smartphone, the Litemons series is always your best choice for vlogging, YouTube video, party lighting, selfie, portrait, product photography and more.

Tech Specs

Model	LC30D	LC30Bi
Power Supply	DC14V	DC14V
Power	Max.33W	Max.38W
Color Temperature	5600K	3200K-6500K
FX Type	8	11
Brightness Range	0%-100%	
CRI≈	95	
TLCI≈	96	
Working Environment Temperature	-10°C~40°C	
Dimension	≈76*76*92mm	≈76*76*92mm
Net Weight	≈299g	≈299g

Key Features

- Compact and portable
- High CRI/TLCI rating of 95+/96+
- Adjustable color temperature from 3200K-6500K
- Comaptible with collapsible diffusers for soft and variable light effects
- LC30D features 8 FX light effects while LC30Bi has 11 FX light effects
- Handheld freedom with grip and battery box in the accessory kit ML-AK
- Run with AC adapter or two NP-F970 batteries (optional)

Illuminance Data

LC30D				
CTT	Illuminance unit	0.5m	1m	2m
5600K	lux	35800	9600	2500
	fc	3300	900	230


LC30Bi				
CTT	Illuminance unit	0.5m	1m	2m
3200K	lux	28200	6750	1830
	fc	2110	627	170
4300K	lux	30100	8890	2420
	fc	2800	826	225
5600K	lux	27300	8010	2190
	fc	2540	745	204
6500K	lux	25200	7320	2010
	fc	2340	680	187

All the above tests are based on the condition of 100% brightness




LED6R

LED6R Bi

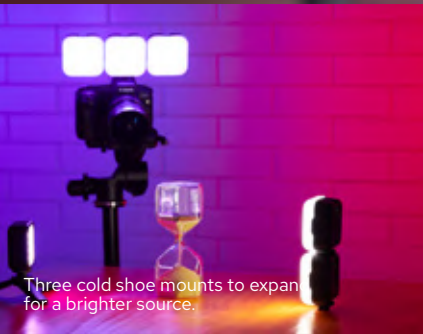

Three cold shoe mounts to expand for a brighter source.

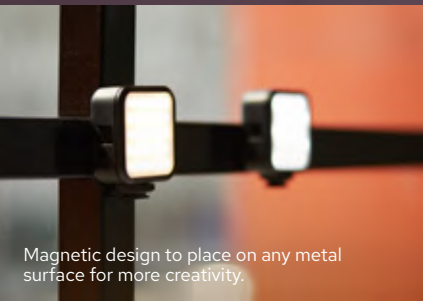

Magnetic design to place on any metal surface for more creativity.



36000 Colors



Light Effects



Magnet
Absorption



Use in
Combination



Type-C
Port

Litemons video light series is a set of entry-level tools designed to make your journey of the content creation much easier, a portable, ease-of-use and budget-friendly lighting solution to which our LED6R/LED6Bi belongs. Small but versatile, the two lights are made for different needs. For creators who'd love to play with colors and try dramatic effects, the RGBWW LED6R won't let you down. Otherwise, try LED6Bi if you only need a simple bi-color solution. Working with camera or smartphone, the Litemons series is always your best choice for vlogging, YouTube video, party lighting, selfie, portrait, product photography and more.

Key Features

- Pocket-sized and ultra-lightweight
- RGB/CCT & 3200 to 6500K Color Temperature
- 0 to 100% Brightness Dimming
- Built-In Display Panel
- Integrated 1800mAh Lithium Battery
- Magnetic Mounting
- Cold Shoe Mounting Foot & 3 x Cold Shoes
- Vertically & Horizontally Stackable

Tech Specs

Model	LED6DR	LED6DBi
Built-in Lithium Battery	1800mAh	1800mAh
Power Source of Charging	5V/2A	5V/2A
Power	Max. 6W	Max. 6W
Color Temperature Range	3200K~6500K	3200K~6500K (in 9 levels)
100% Illuminance(LUX)(0.5m)(s)	270	360
CRI(≈)	95	95
Brightness Range	0%~100%	in 10 levels
Duration	2H-10H	1.5H-10H
Working Environment Temperature	-10~40°C	-10~40°C
Dimension	77*66*30mm	77*66*30mm
Net Weight	110g	110g

* RGB mode, FX mode, magnetic design (only for LED 6R)

GODOX CONTROL



APP Control



Godox Light App, the wireless control system for Godox LED lights, has been upgraded to an optimal version 3.0, aiming to provide users with maximum convenience and efficiency at hand. Based on mesh Bluetooth transmission, Godox Light allows for fast and stable connection of Godox LED lights.

Key Features

- Fast and stable connection based on mesh Bluetooth transmission.
- User-friendly UI and well-organized menu.
- Group function to achieve synchronous control over multiple fixtures.
- Multiple adjustment methods: HSI, RGB, X/Y, GEL and Color Picker.
- More precise control over unique pixel effects.
- Favorites and date share function to enable a seamless workflow.
- More details: Quick Switch & Find Light function.
- Supporting both iOS and Android systems.

Remote Control



RC-R9II

RGB 2.4GHz Remote Control
Group: 16 Channel: 32 ID: 99
Light Brightness Adjustment Range:
0% to 100%
Freely adjust multiple beautiful colors
and color temperature from
2500K to 8500K
Compatible with:
TL60, TL120, TL180, SZ150R, SZ300R
LC500R, LD75R, LD150R, LD150Rs



RC-A6II

2.4GHz Remote Control
Group: 16 Channel: 32
Light Brightness Adjustment Range:
0% to 100%
Compatible with:
LF308D, LF308Bi, FV150, FV200, SL100D,
SL100Bi, SL150II, SL200II, S60, S60Bi, ML30,
ML30Bi, ML60, ML60Bi, SZ200Bi, SL60II,
SL150III, SL200III, SL300III, VLII, UL60, UL60Bi,
UL150II, UL150IIBi, M200D, M200Bi, M300D,
M300Bi, M600D, M600Bi, MG1200Bi



RC-A5II

433MHz Remote Control
Group: 6 Channel: 16
Light Brightness Adjustment Range:
0% to 100%
Compatible with:
LC500, SL150W, SL200W,
SL60W, SL60Y, FL100, FL150R, FL150S,
FL60, LED308, LED380II, LED500L,
LED500LR, LEDP260C, SLB60W, VL150,
VL200, VL300, LED1000BiII, LED1000DiII,
UL150



TimoLink RX

TimoLink TX

Built with CRMX modules from Lumenradio, TimoLink TX and TimoLink RX are wireless DMX transmitters and receivers compatible with Godox or other fixtures featuring DMX control capabilities.

The transmitter TimoLink TX converts a wired DMX console to wireless by sending signals to CRMX-compatible fixtures or receivers. As for the receiver TimoLink RX, it works perfectly with DMX-compatible fixtures that do not include wireless modules (such as LA600R/Bi) and enables them to achieve wireless DMX control. TimoLink TX and TimoLink RX are ideal for filmmaking, broadcasting and other scenes where wireless DMX is needed.

Key Features

- Automatic frequency hopping ensures stable signals within 300m.
- 270° rotatable connectors for wider compatibility with different interface designs.
- Separately designed SET button and RESET button simplify operation logic and enhance efficiency.
- The TEST feature for TimoLink TX can help check the connection status of lights even off the DMX board.



Optional Purchase



TL-C120
RJ45 to 5-Pin XLR Conversion Cable

RJ45 Ethernet to 5 Pin XLR Conversion Cable allows you to run standard 5 Pin DMX cable to the Godox lights or any light fixture with RJ45 DMX input connectors.

Tech Specs

Name	Wireless DMX Transmitter	Wireless DMX Receiver
Model	TimoLink TX	TimoLink RX
Input Parameter	5V=280mA	5V=90mA
Colors of Signal Indicator	8	8
Power Supply Port	Type-C	Type-C
Compatible Models	DMX512 Controller/DMX240 Controller (incompatible with New Sunny 512 Controller)	Fixtures with DMX functions
DMX Plug Rotatable Angle	270°	270°
Controlling Distance	Max. 300m (in an open and barrier-free environment)	Max. 300m (in an open and barrier-free environment)
Working Environment Temperature	-20~45°C	-20~45°C
Dimension	141*96*26mm	110*53*26mm
Net Weight	89g	80g

A person is shown from the chest up, adjusting a large studio light on a stand. The light is a large, circular, silver-colored fixture with a bright, warm glow. The person's hands are visible, adjusting the light's position. The background is a brick wall. The overall lighting is dim, with the primary light source being the studio light itself. The text "LENS & GOBOS" is overlaid in white, bold, sans-serif font at the bottom right of the image.

LENS & GOBOS



Godox offers a complete Fresnel system, allowing all Godox COB lights to easily enhance their intensity with a compatible Fresnel lens, regardless of their mount. Built with class-leading technology to intensify the LED light, the Fresnel lenses empower your lights to deliver an even brighter beam and render consistent luminescence with smooth intensity.

Key Features

- **Intensify the Output**
The Godox Fresnel Lenses can multiply the output of Godox LED lights.
- **Variable Beam Angle**
Beam thrown by the Fresnel Lenses can be adjusted from a spot angle to a flood one.
FLS5: 10°~35°/FLS8: 10°~40°/FLS10: 10°~35°
- **Robust Construction**
The ergonomic and sturdy build of the Godox Fresnel Lenses ensures minimized light leaks and rugged durability.
- **Compatible with Barndoors**
Compatible with the Godox 8-leaf barndoors to precisely cut and shape the light for more creative expressions.




FLS5+LB-03

FLS5 is compatible with Godox LED lights which adopt Godox Mount, such as ML60, ML60Bi, ML30, ML30Bi.



FLS10+LB-02


FLS10 is compatible with all Godox Bowens Mount LED lights.

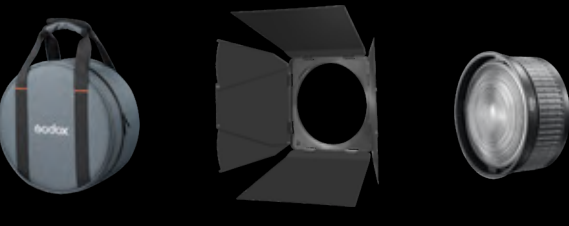

FLS8+LB-01

FLS8 is compatible with the majority of Godox Bowens Mount LED lights.

*M600D and M600Bi are incompatible owing to their particular rings.

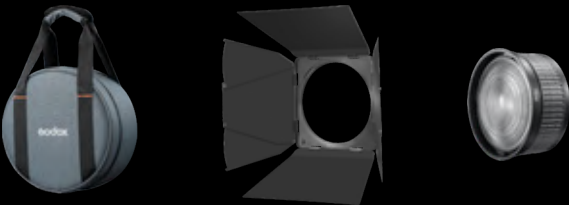

Tech Specs

Model	FLS5	FLS8	FLS10
Adjustable Beam Angle	10°-35°	10°-40°	10°-35°
Working Temperature	-10°C~40°C	-10°C~40°C	-10°C~40°C
Dimension	147*147*61mm	246*246*121mm	295*295*135mm
Weight	0.42kg	2kg	3kg



Projection Attachment

VSA-36K/VSA-26K/VSA-19K

With three optional lenses, the powerful creating tool is designed with utmost precision to grant the LED lights with even, crisp, and clear beam and brings you with an endless source of inspiration.

Key Features

- Throwing an evenly intensified illumination circle without shifting in color and brightness from center to edge.
- Adopting a class-leading lens system to eliminate aberration to strike an incredible crisp beam of light with sharp-edge projection
- Bring you ultra fun to create by cutting, shaping, focusing,and coloring the light.
- Interchangeable lens in 19°, 26°, 36°.
- Bowens mount for wide compatibility.
- Robust yolk allowing for versatile shooting scenarios.

Dimension and Weight

Spotlight Attachment Kit Model	VSA-19K/VSA-26K/VSA-36K
Spotlight Attachment Dimension	516*241*196mm
(Excluding Lens)	
Lens Dimension	135*219*137mm
Spotlight Attachment Weight(Excluding Lens)	3.42kg
Projection Lens 19° Weight	1.94kg
Projection Lens 26° Weight	1.75kg
Projection Lens 36° Weight	1.92kg



Projection Attachment

VSA-36K/VSA-26K/VSA-19K

Dimension and Weight

LED Video Light	CCT	Spotlight Attachment	Lens	Illuminance Unit	3m	4m	5m
VL300	5600 100%	NO	NO	fc	1380	860	602
				lux	128.3	79.9	55.9
		YES	Projection Lens 19°	fc	7530	4040	2400
				lux	699.8	375.5	223
		YES	Projection Lens 26°	fc	5130	2830	1720
				lux	476.8	263	159.9
		YES	Projection Lens 36°	fc	4200	2330	1430
				lux	390.3	216.5	132.9

Note: The above luminance and CCT values are all average numbers, the illuminance values of different lights vary slightly.

Optional Purchase

- Gobo Set VSA-GS1

Gobo Set VSA-GS2

Gobo Set VSA-GS3

Gobo Set VSA-GS4

CCT Adjustment Set VSA-IIT

CCT Adiustment Set VSA-IIC
- Iris Diaphragm VSA-ID

Lens Portabe Bag

Lens 19°

Lens 26°

Lens 36°



VSA-19K Kit

- Spot Light Mount

19° lens

Gobo Holder

Gobo

Gel Frame

Portable Bag
- ×1

×1

×1

×3

×1

×1



VSA-26K Kit

- Spot Light Mount

26° lens

Gobo Holder

Gobo

Gel Frame

Portable Bag
- ×1

×1

×1

×3

×1

×1



VSA-36K Kit

- Spot Light Mount

36° lens

Gobo Holder

Gobo

Gel Frame

Portable Bag
- ×1

×1

×1

×3

×1

×1



Projection Attachment

ML-SP




Key Features

- Godox Mount
- 360° Rotatable Design
- Sharp Edges and Crystal-clear Images
- Superior Heat Management
- Expansive Lens Options
- Versatile EF-Mount


Tech Specs

Model	Dimension≈	Net Weight≈
Projection attachment ML-SP	134*134*129mm	697g
Lens 19°	107*65*65mm	427g
Lens 36°	64*65*65mm	255g
Lens 50°	93*65*65mm	392g


Optional Purchase




SP-19°
Projection Lens 19°




SP-36°
Projection Lens 36°




SP-50°
Projection Lens 50°




SP-CTF
Color Frame




SP-CF
Gobo Holder




SP-ID
Iris Diaphragm




SA-11T
CCT Adjustment Set




SA-11C
Color Effects Set




Gobo Set
SA-09-001




Gobo Set
SA-09-002




Gobo Set
SA-09-003



Gobo Set
SA-09-004



Gobo Set
MLP-GS



SP-DUST
Projection Diffuser

Projection Attachment

BP-SE



Key Features

- Unique Design for Flat Bowens Mount
- 360° Rotatable Design
- Sharp Edges and Crystal-clear Images
- Superior Heat Management
- Expansive Lens Options
- Versatile EF-Mount

Tech Specs

Model	Dimension	Net Weight
Projection tube (excluding lens)	220*220*118mm	≈1.3kg
65mm Lens	80*80*83mm	≈0.5kg
85mm Lens	80*80**89mm	≈0.5kg
150mm Lens	80*80*129mm	≈0.7kg

Optional Purchase



Lens 48mm



Lens 65mm



Lens 85mm



Lens 150mm



MLP-CF
Gobo Holder



MLP-ID
Iris Diaphragm



BLP-CTF
Gel Frame



BLP-CTF 48mm
Gel Frame



Gobo Set
SA-09-001




Gobo Set
SA-09-002



Gobo Set
SA-09-003



Gobo Set
SA-09-004




SA-11T
CCT Adjustment Set



SA-11C
Color Effects Set



SA-GD
Godox-mount Adapter

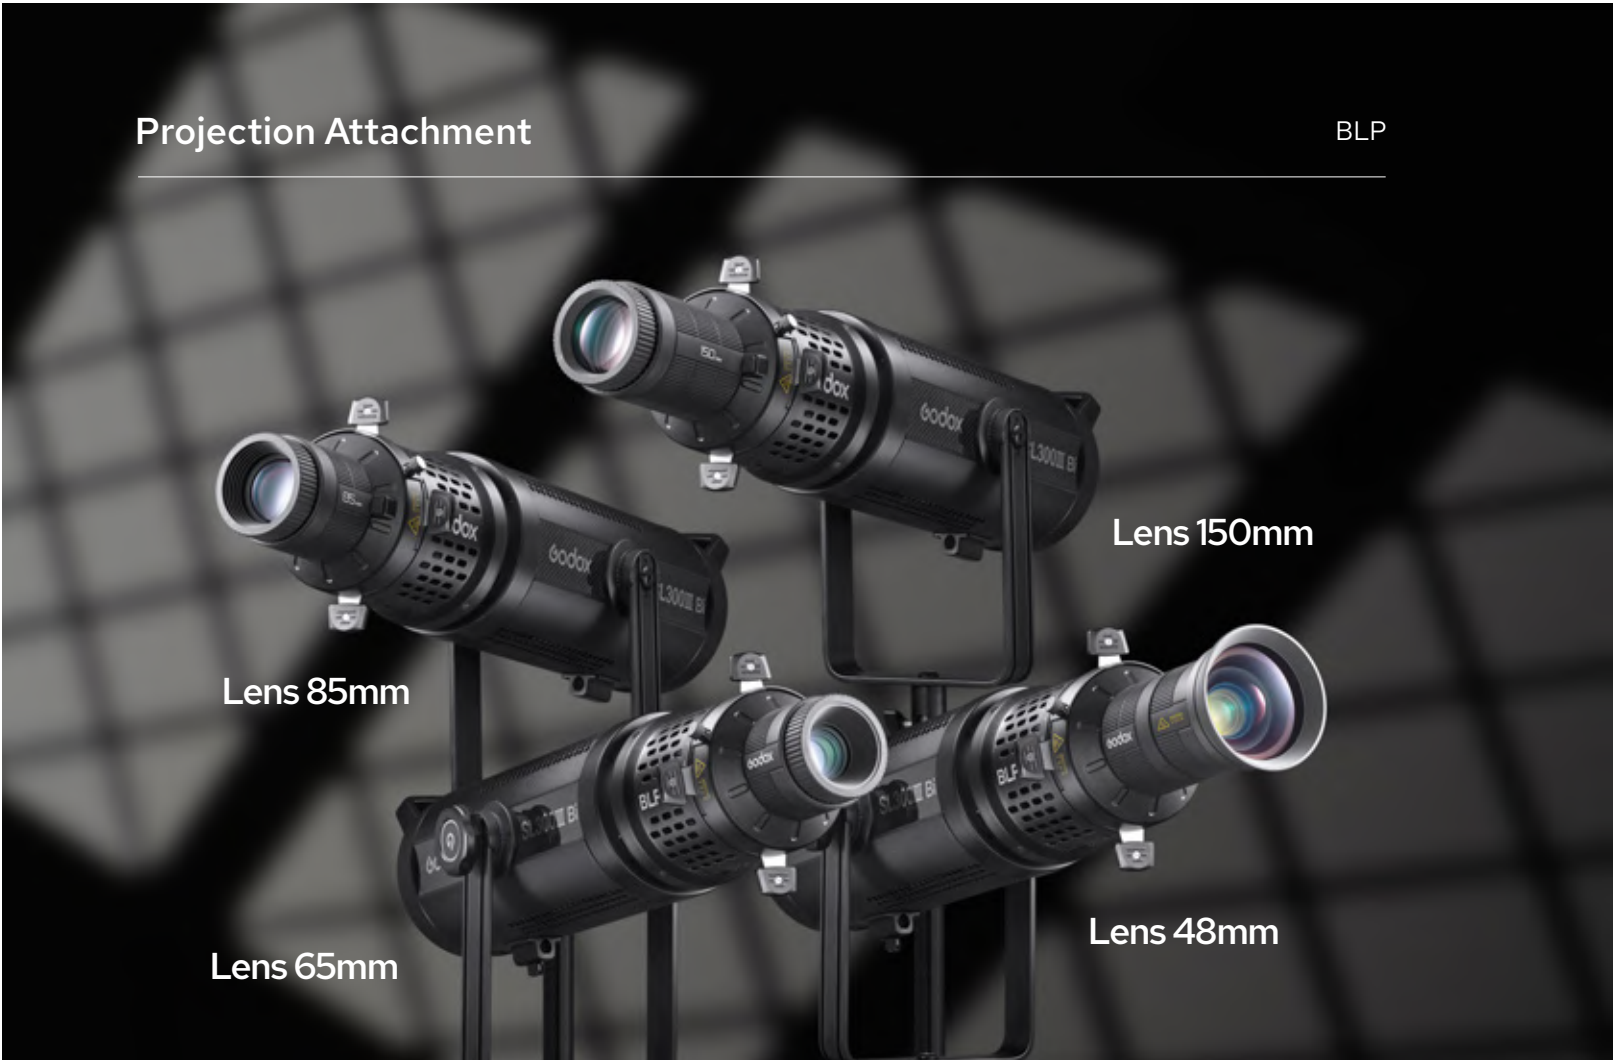


Meet the BLP, where creativity merges with playfulness. 360° rotatable design allows for effortless adjustment of projection patterns. And with superior heat management, expansive lens options, and endless creative accessories, the BLP serves as a perfect tool for artists and creators. Beyond just lighting, the BLP is a catalyst for artistic brilliance.

Key Features


- 360° Rotatable Design
- Expertly Crafted Lenses for Clear & Sharp Visuals
- Superior Heat Management
- Expansive Lens Options(48mm, 65mm, 85mm, and 150mm)
- Versatile EF-Mount
- Bowens Mount for Wide Compatibility
- Abundant Creative Accessories




The lens barrel can be rotated 360°

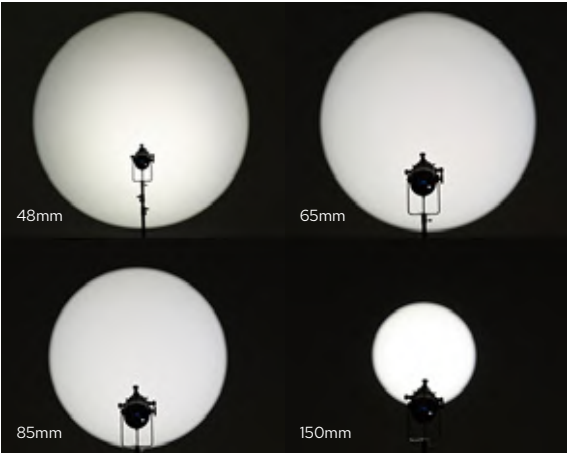

Enrich lens ecology

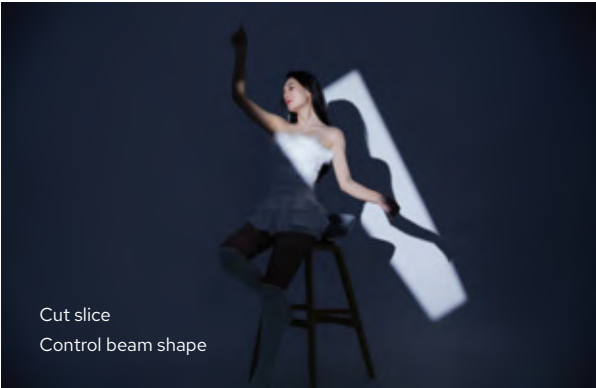


Cut slice
Control beam shape

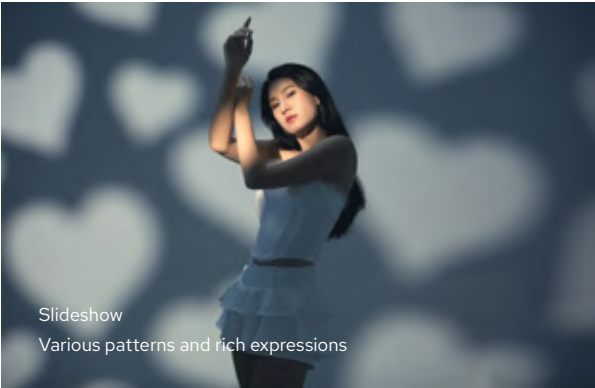

Slideshow
Various patterns and rich expressions



Color Film
Colorful background creates atmosphere

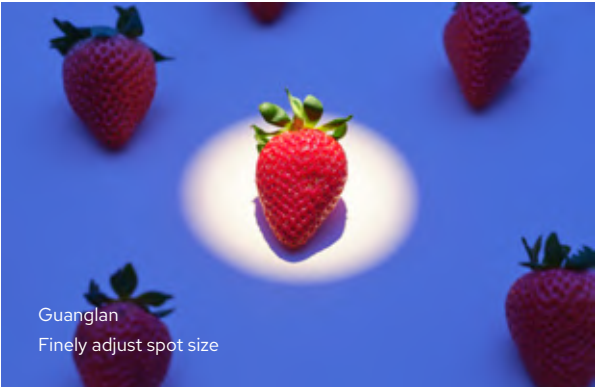

Guanglan
Finely adjust spot size

Optional Purchase



Lens 48mm



Lens 65mm



Lens 85mm



Lens 150mm



MLP-CF
Gobo Holder



MLP-ID
Iris Diaphragm



BLP-CTF
Gel Frame



BLP-CTF 48mm
Gel Frame



Gobo Set
SA-09-001



Gobo Set
SA-09-002



Gobo Set
SA-09-003



Gobo Set
SA-09-004



SA-11T
CCT Adjustment
Set



SA-11C
Color Effects
Set



SA-GD
Godox-mount
Adapter

Tech Specs

Projection Attachment	Dimension	Net Weight
(excluding lens)	220*220*166mm	≈1.3kg
48mm Lens	104*104*160mm	≈1.2kg
65mm Lens	80*80**72mm	≈0.5kg
85mm Lens	80*80*88mm	≈0.5kg
150mm Lens	80*80*129mm	≈0.7kg

illuminance Data


Distance	Illumination unit	Bare lamp M300Bi	65mm	85mm	150mm
3m	lux	≈1570	≈1170	≈1930	≈4890
	fc	≈146	≈109	≈179	≈454
4m	lux	≈825	≈655	≈1090	≈2730
	fc	≈76.6	≈60.8	≈101	≈254
5m	lux	≈531	≈420	≈692	≈1710
	fc	≈49.4	≈39	≈64.3	≈159



Compatible with the compact ML Series lights which adopts Godox mount, the projection attachment MLP Series is crafted for creators, ready to illuminate your artistic vision. From evenly intensified lighting to flawless optical results, the MLP Series offers stunning precision and versatility. With various accessories, it empowers you to explore endless creative possibilities.

Key Features

- Evenly intensifying the illumination
- Class-leading lens system to ensure a crisp and clear beam without aberration
- Rotatable lens barrel for convenient orientation adjustment
- Various accessories for creative expressions
- Three interchangeable lenses 19°, 26°, and 36°

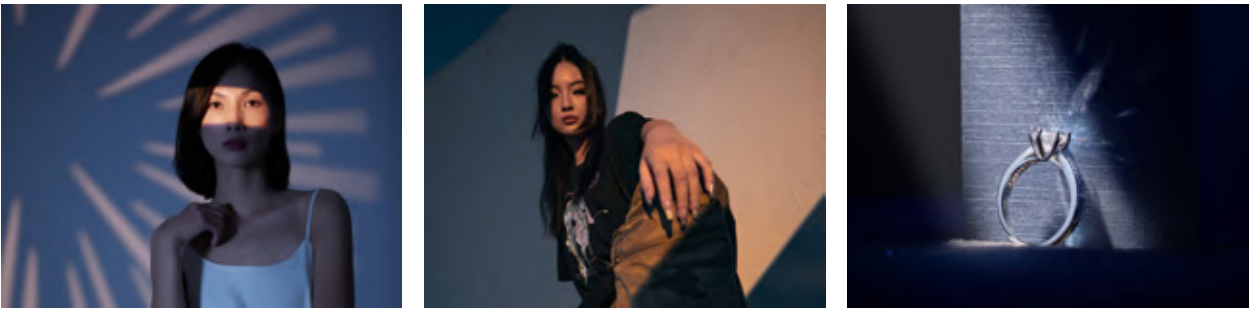

Optional Purchase



Lens 19°



Lens 26°



Lens 36°



CB92
Lens Portabe Bag



MLP-ID
Iris Diaphragm



MLP-IIT
CCT Adjustment
Set



MLP-IIC
Color Effects
Set



Gobo Set SA-09-001



Gobo Set SA-09-002



Gobo Set SA-09-003



Gobo Set SA-09-004

Tech Specs

Model	Dimension	Weight
Projection attachment	237*219*277mm/9.3*8.6*10.9"	≈1.43kg
(including lens)		
Lens 19°	131*118*150mm/5.2*4.6*5.9"	≈1.22kg
Lens 26°	131*118*150mm/5.2*4.6*5.9"	≈1.05kg
Lens 36°	131*118*150mm/5.2*4.6*5.9"	≈0.99kg

illuminance Data (with ML60)

CCT	Lens	Unit	2m	3m	5m
5600K	Bare light	lux	618	286	109
		fc	57.5	26.5	10.1
	Lens 19°	lux	8300	3560	1230
		fc	793	328	113
	Lens 26°	lux	5520	2410	840
		fc	523	220	77
	Lens 36°	lux	2970	1320	462
		fc	283	120	42.6

ACCESSORIES


Projection Attachment


SA-17

SA-17

Godox SA-17 Adapter for Bowens-mount LED lights to Projection Attachment, with its solid construction, allows you to use Godox SA-P Projection attachment with any of your Bowens-mount LED Lights for achieving a greater degree of control with your light.

Extending the SA-P Projection Attachment's Compatibility
The adapter allows COB Bowens-mount LED lights users to release their boundless creativity by matching with SA-P projection attachment to achieve their desired effects. For users who already own S30 focusing light, now they can go beyond S30 and use the adapter to serve for a broader range of Bowens-mount LED lights. Equipped with built-in optical lens, the adapter provides excellent optical performance, assuring light output that's even from edge to edge.

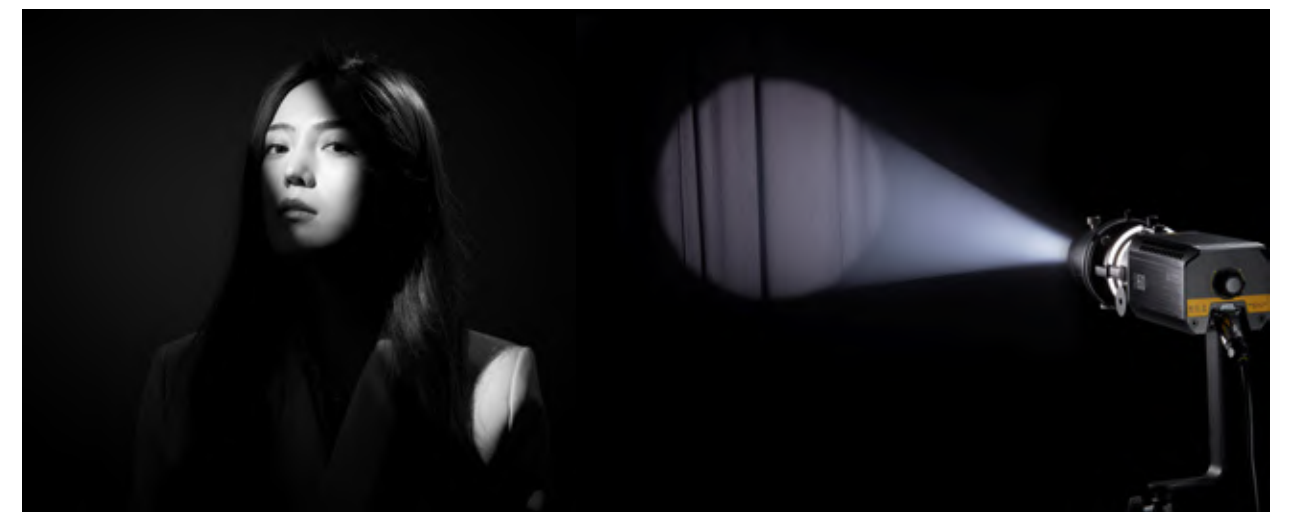

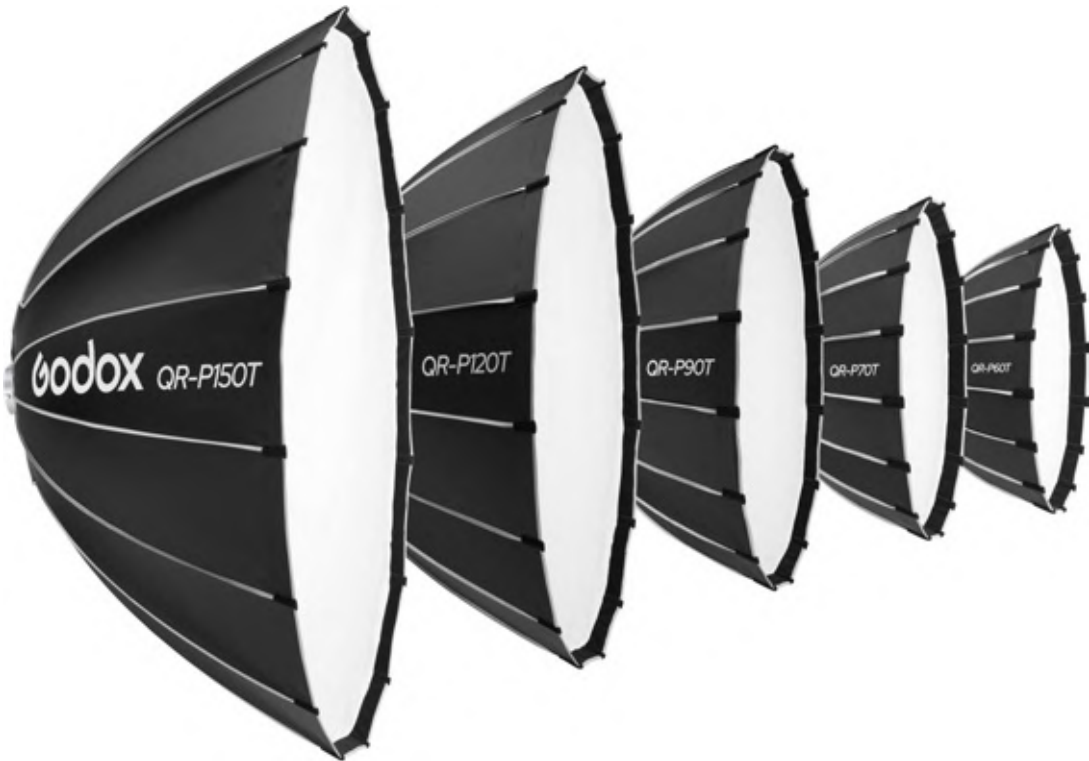


QR-P150T QR-P120T QR-P90T QR-P70T QR-P60T



QR-P series boasts a more compact design in comparison to its predecessors within the same series.Crafted as a softbox tailored for small-space live streaming and video production, its quick-release system simplifies setup and breakdown.The internal diffuser design, tightly connected with Velcro, ensures perfect diffusing result. Available in five diameters(2',2.3',3' 4', and 5'), it proves to be the ideal companion for on-site and small-space shooting.

Key Features

- Compact & space-saving
- Quick-mount design enables easy setup and dismantling
- Double-layered soft light cloth for dual soft light effects
- Optional grids for precise light control
- Grid models: QR-P60T-G, QR-P70T-G, QR-P90T-G, QR-P120T-G,QR-P150T-G
- Bowens mount, compatible with optional mounting plates for versatility

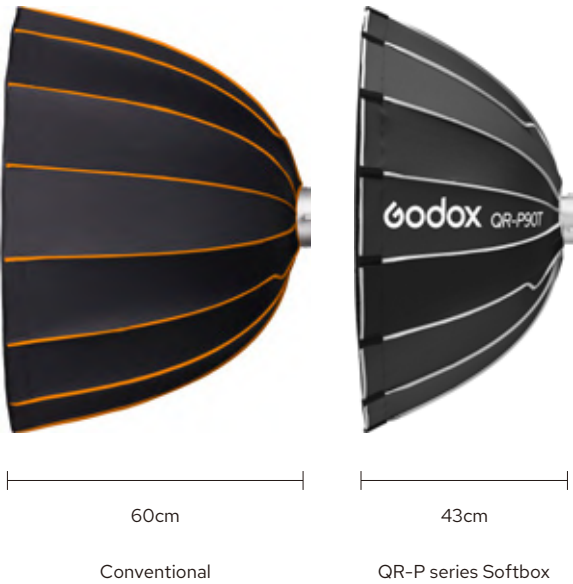

The inner diffuser is closely attached to the softbox with Velcro, ensuring perfect diffusing result.

Bowens-Mount Capability

SA-GD(optional)
Speed Ring for Godox

SA-PF(optional)
Speed Ring for Profoto

SA-BR(optional)
Speed Ring for Broncolor

Tech Specs

Model	Net Weight	Dimension(Depth x Diameter)
QR-P60T	0.771kg	29.8*60cm
QR-P70T	0.830kg	34.1*70cm
QR-P90T	1.359kg	42.7*90cm
QR-P120T	1.781kg	56.7*120cm
QR-P150T	2.386kg	70.2*150cm

QR-P60T/P70T/P90T/P120T/P150T

Softbox	×1	Inner Fabric Diffuser	×1
Front Fabric Diffusers	×1	Carring Bag	×1




CS-50T CS-65T CS-85T

CS-50T/CS-65T/CS-85T, the ideal soft lighting source for small spaces. With heights ranging from 1.1' to 1.8' when fully expanded, the CS-T series Softbox with a shallower depth offer exceptional versatility in compact settings, emitting soft and uniform lighting in all directions. They are perfect for live streaming and video recordings.

Key Features

- Standing at heights of just 1.1', 1.4', and 1.8'
- Quick-mount design for effortless installation with a single press
- 270-degree beam angle for soft, uniform lighting
- Detachable skirt for precise light control
- Universal Bowens mount, compatible with various lights
- Optional interchangeable mounting plates: SA-PF/SA-BR/SA-GD

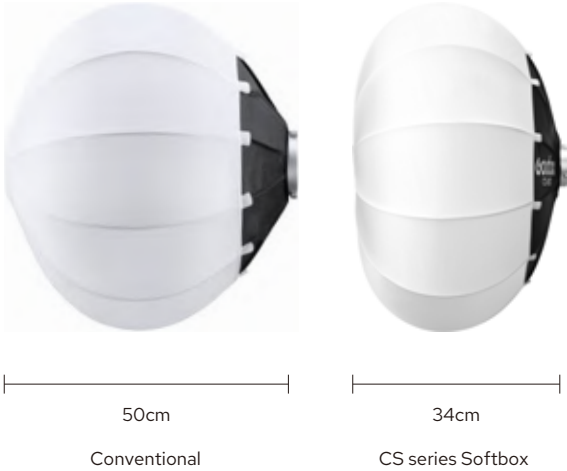

The diffuser is securely fastened to the frame with Velcro tape, keeping the umbrella ribs in place, enabling the Softbox to expand and collapse in just one second, greatly enhancing workflow efficiency.




Achieve precise light control with the detachable skirt, easily attachable to the Lantern, allowing you to eliminate unwanted bouncing light by rolling it up or down.



CS-50T/CS-65T/CS-85T
Softbox ×1 Carring Bag ×1

Tech Specs

Model	Net Weight	Dimension(Depth x Diameter)
CS-50T	0.869kg	33.5*50cm
CS-65T	0.129kg	41.8*65cm
CS-80T	1.400kg	54.1*85cm

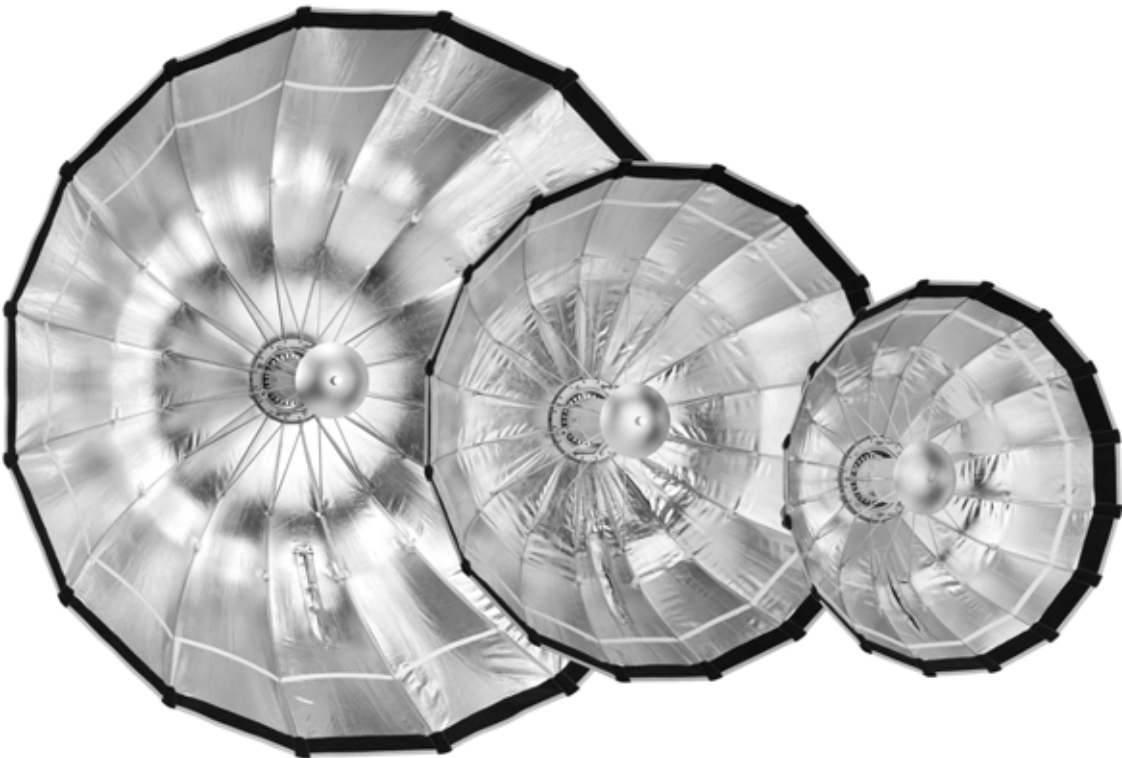

S120T

S85T

S65T


Godox Quick Release Umbrella Softbox adopts an effortless quick-release mechanism for hassle-free set-up and breakdown.Highly versatile and compact, the Quick Release Umbrella Softbox ensures efficient creation.Available in 3 different sizes, the Godox Quick Release Umbrella Softbox adopts an effortless quick-release mechanism for hassle-free set-up and breakdown.Highly versatile and compact, the Quick Release Umbrella Softbox ensures efficient creation.Available in 3 different sizes, the lightweight quick-release softbox is your ideal choice for home,studio, and travel.

Key Features

- Quick Release Mechanism
- Crafted with shadow design(11.8inch depth)
- Lightweight Beauty Dish
- Versatile Compatibility
- Compact and portable



Designed for shooting on-the-go,it is foldable and highly portable, ideal for location,ensuring convenience wherever you are.

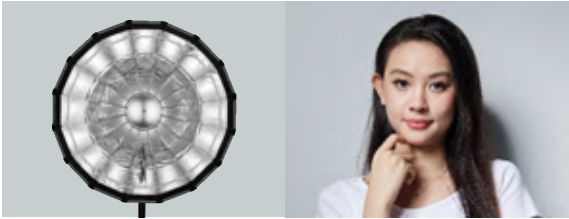

With the deflector plate (optional) and the silver interior, you can have a soft look but with an edge of crispness, just like the lighting effects achieved by a beauty dish, but a more lightweight one.



S65T/85T/120T

Softbox	×1	Inner Diffuser	×1
Carring Bag	×1	Front Diffuser	×1

Optional

Grid	Deflector Plate	Speed Ring
S65T-G	S65T-P	SA-GD for Godox
S85T-G	S85T-P	SA- BR for Broncolor
S120T-G	S120T-P	SA-PF for Profoto

Tech Specs

Model	S65T	S85T	S120T
Diameter Open	65cm	85cm	120cm
Depth Open	30cm	38cm	49cm
Collapsed Softbox Length	42cm	56cm	78cm
Net Weight	0.851kg	1.016kg	1.424kg



AD-S60S

Compatible with AD300Pro/ML60/ML60Bi, comes with grids
Godox AD-S60S is a dedicated softbox with silver interior finish and parabolic reflecting shape to deliver indirect lighting and create distinct contrasts. The softbox has native Godox mount to snap onto the AD300Pro or ML60/ML60Bi in no time, comes with two levels of diffusion to create degrees of increased softness, includes grids for extra beam directing, and has zippered slot for cables and cord placement on the side.

AD-S65S/AD-S65W

Compatible with AD300Pro/AD400PRO/ML60/ML60Bi, comes with grids
The parabolic softbox has two model AD-S65S with silver lining and AD-S65W with white lining. AD-S65 softbox adopts parabolic box design to offer soft and even light effects for shooting. The shape of the softbox allows the user to control precisely where the light falls and soften the light stream and is built on the basis of a quick folding mechanism.

AD-S85S/AD-S85W


Compatible with AD300Pro/AD400PRO/ML60/ML60Bi, comes with grids
With deep design to output soft light with a sharp falloff, Godox AD-S85 makes feathering and edge-lighting simple. The included fabric grid thwarts spill light and offers directional control necessary for selective lighting. Its quick-folding mechanism allows you to set up and break down quickly.



The Godox mount softboxes comes with a grid that eliminates spill light and provides the directional control that facilitates selective lighting.



If you want a cool-toned look with snappy contrast, attach the silver reflector inside the umbrella. If you want a soft, warm rendition attach the gold reflector. The removable front diffuser makes it easy.




CS-85D/CS-65D

Godox Collapsible Lantern Softbox CS-85D/CS-65D is perfect for use overhead or to raise the ambient illumination level. With a 270 degree beam angle, the light is ideal for video recording, live streaming, film making, and still life photography.

Key Features

- Extremely Fast Setup
- Stunning, Soft, Omni-Directional Light
- Bowens Mount Compatibility
- Optional skirts for beam spread control

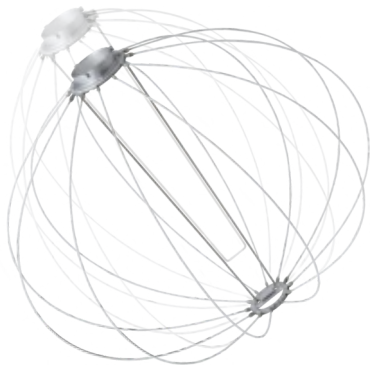

Thanks to its simple and durable design, this softbox is a breeze to use. The lantern can be popped open or closed in mere seconds.

Purchase skirt for achieving better light control Skirt Set for Lantern Softbox (Available for Purchase)SS-65 for CS-65D/SS-85 for CS-85D






P90L/P90H

Godox Parabolic Softboxes are the essential modifier for commercial, fashion, and portrait photographers. There are two version for choice, P90L for Lighy Version and P90H for High Temperature Resistant Version. P90L/P90H series adopt deep parabolic box design,which enables light to be sent out straightly and brightness, offering even, soft, and high saturation light effects for shooting with easy installation, great portability. P90L/P90H comes with removable one-stop outer and inner diffusers to achieve different levels of contrast. A carry bag is included for storage and transport.

P120L/P120H

Godox P120L/P120H softbox is useful for stunning fashion and portraiture images. Same as P90L/P90H, the P120 softbox also has two version. P120L/P120H is a 16-sided light-shaper offering focused, soft output with a punchy, crisp edge that lends dimension and detail to your subject as well as natural-looking catchlights in their eyes. The parabolic design yields soft, focused light with a crisp edge. With removable outer and inner diffusers, it can achieve desired contrast. A carry bag is included for storage and transport.

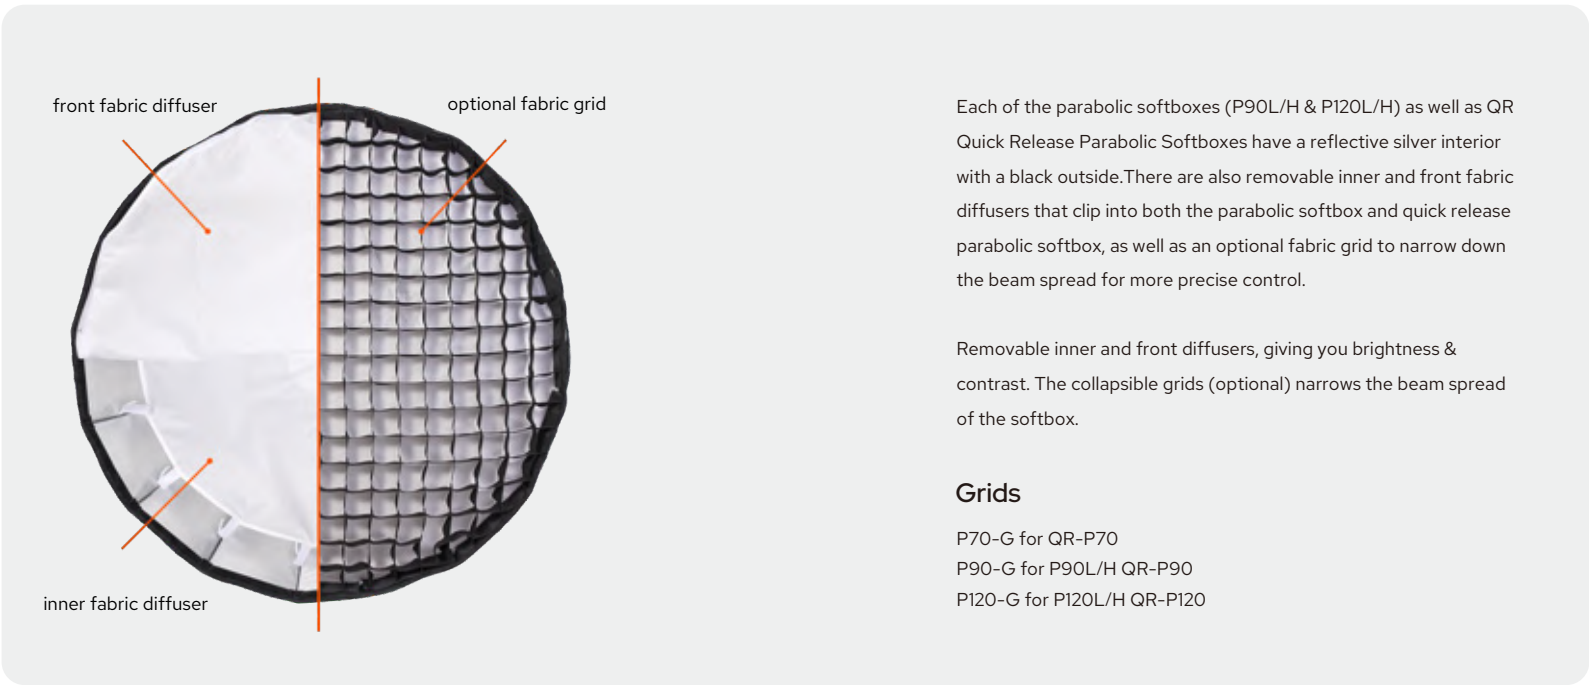

QR-P70/P90/P120

The Godox quick release parabolic softbox adopts an impressive quick release system for rapid setup and breakdown. Highly versatile and compatible, it provides you reliable light quality and various creative expressions. Available in three different sizes, this fast and easy to use softbox is deal companion for your indoor and on location shootings

Key Features

- Reflective silver interior to render a punchy high contrast
- Removable inner and front fabric diffusers
- Impressive quick release system for rapid setup and breakdown
- Reliable light quality and various creative expressions
- Bowens mount strobes and continuous light compatible

Parabolic Softbox | Quick Release Bowens Mount

QR-P70/P90/P120

Compatible with any flash head or monolight that uses the popular Bowens accessory mount; The softbox can also mount with Godox mount and Profoto mount accessory via attaching the SA-GD Godox mount adapter (optional) and SA-PF2 Profoto mount adapter (optional). And speed ring SA-BR2 is for adapting Broncolor lights.



As it folds down into an easy carry bag, it's extremely portable and therefore ideal to use on location.



Effortless Softbox Setup

The easiest way to put the softbox up is to click two rods on opposite sides up at the same time. Once they're all clicked into place, you simply Velcro the top panels of the softbox together to prevent light leakage.



To take the softbox down again, you simply lift the rod slightly whilst pressing down the button above it.

In this way,you can have the softbox assembled in mere minutes.



Softbox | Bowens Mount

Godox offers sofboxes with Bowens mounting, which fits most of Godox flash heads or other brands with the widely used Bowens front accessory mount. Ideal for all types of photo work, Godox softboxes render a soft, flattering quaiity of light with manageable contrast.There are SB-FW Series, SB-USW Series, and SB-GUE Series include grids to offer drectional control of the output, keeping light off the background, and allowing you to light specific areas of your subject.



Square Softbox
Model: SB-BW-6060/9090
Sizes (W×H): 60x60cm,90x90cm



Rectangular Softbox
Model: SB-BW-6090/70100/80120
Sizes (W×H): 60x60cm,70x100cm,80x120cm



Strip Softbox
Model: SB-BW-50130/35160
Sizes (W×H): 50×130cm,35×160cm



Octagon Softbox
Model: SB-BW-95/120/140
Sizes: 95cm,120cm,140cm



Square Softbox with Grid
Model: SB-FW-6060/9090
Sizes (W×H): 60x60cm,90x90cm




Rectangular Softbox with Grid
Model: SB-FW-6090/70100/80120
Sizes (W×H): 60x60cm,70x100cm,80x120cm



Strip Softbox with Grid
Model: SB-FW-50130/35160
Sizes (W×H): 50×130cm,35×160cm




Octagon Softbox with Grid
Model: SB-FW-95/120/140
Sizes: φ95cm,φ120cm,φ140cm

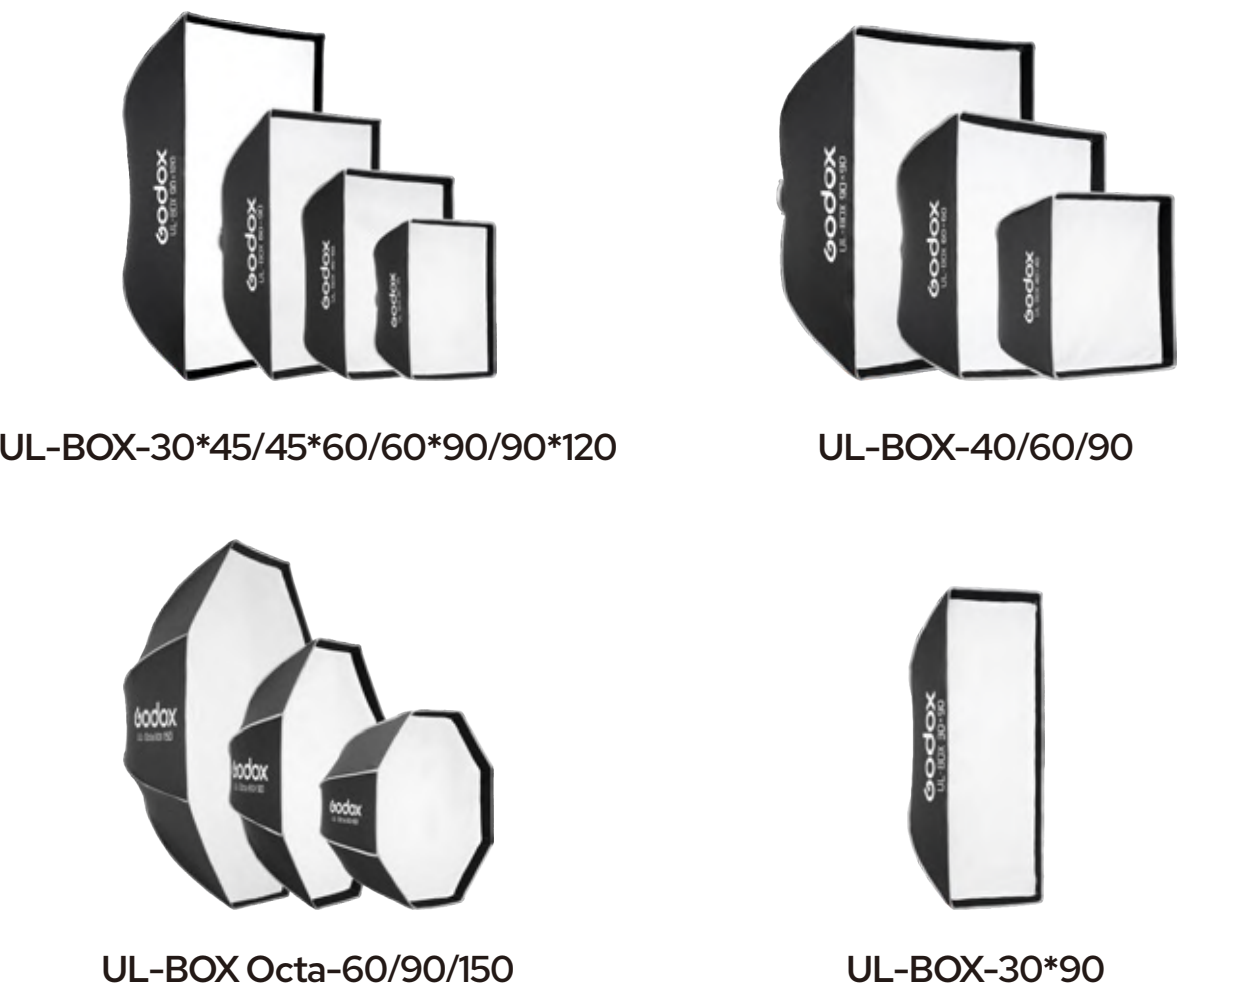

The Godox UL-Series Quick Release Umbrella Softbox is designed for versatility and precision. With a variety of shapes, sizes, and compatibility options, it provides a flexible toolkit for effortlessly creating impactful portraits, product shots, and still-life imagery.

Key Features

- Variety of Sizes: Octagonal, strip, rectangular, and square options (30cm to 180cm).
- Quick Set-Up: Opens and closes like an umbrella.
- Light Shaping: Optional diffuser and edge mask for customized lighting.
- Portable: Lightweight and collapsible for easy transport.
- Wide Compatibility: Bowens mount, compatible with strobes and continuous lights.

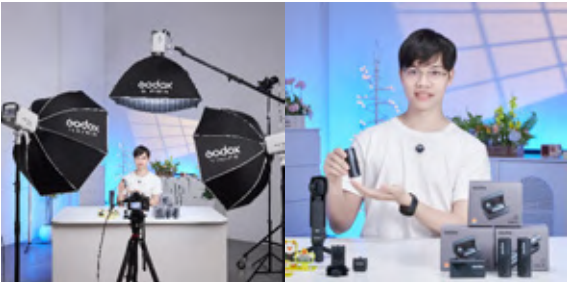

Sample Softbox: UL-BOX Octa-60

(other sizes/shapes available).

UL-KIT-PRO Softbox Pro Kit
with Diffuser & Grid

			
Softbox	x1	Inner White	x1
Carry Bag	x1	Outer White	x1
		Grid	x1
		Diffuser Plate	x1

Tech Specs

Model	Net Weight	Diameter Open	Depth Open	Folded Length
UL-BOX Octa-60	800g	60cm	39cm	49cm
UL-BOX Octa-90	1100g	90cm	57cm	83cm
UL-BOX Octa-150	1750g	150cm	55cm	92cm
UL-BOX-40	650g	40cm	33.5cm	43cm
UL-BOX-60	850g	60cm	38cm	55cm
UL-BOX-90	1150g	90cm	38cm	57cm
UL-BOX-30*45	700g	30/45cm	33.5cm	42cm
UL-BOX-45*60	800g	45/60cm	38cm	53.5cm
UL-BOX-60*90	1000g	60/90cm	49.5cm	71cm
UL-BOX-90*120	1550g	90/120cm	50cm	90cm
UL-BOX-30*90	800g	30/90cm	42cm	63cm

Optional

Edge Mask	Speed Ring
UL-EM-120	SA-GD
UL-EM-150	SA-BR2
UL-EM-180	SA-PF2
UL-EM-60×180	
UL-EM-90×120	
UL-EM-120×180	
Diffuser Plate	
UL-DP-RU	
Grid	Inner/OuterWhiteKit
UL-G-60	UL-IW&OW-O60
UL-G-90	UL-IW&OW-O90
UL-G-120	UL-IW&OW-O120
UL-G-150	UL-IW&OW-O150
UL-G-30×90	UL-IW&OW-O180
UL-G-30×120	UL-IW&OW-30×90
UL-G- -60×180	UL-IW&OW-30×120
UL-G-30×45	UL-IW&OW-60×180
UL-G-45×60	UL-IW&OW-30×45
UL-G-60×90	UL-IW&OW-45×60
UL-G 90×120	UL-IW&OW-60×90
UL-G-40×40	UL-IW&OW- 90×120
UL-G-60×60	UL-IW&OW-120×180
UL-G-90×90	UL-IW&OW-40×40
	UL-IW&OW-60×60
	UL-IW&OW-90×90

Lighting Stands & Mounting

90F

Foldable Floor Light Stand

60cm

48cm

87cm

55cm

1.2kg

3kg

25×5mm

22.4/19mm



190F

Adjustable Legs Light Stand

86/146cm

49cm

188cm

72cm

1.25kg

3kg

19×16mm

29.1/25.7/22.4/19/16mm



210F

Light Stand

100cm

51cm

213cm

65cm

1.4kg

2kg

29.1/25.7/22.4/19mm



240F

Light Stand

92cm

68cm

240cm

80cm

1.3kg

2kg

19mm

25.7/22.4/19/16mm



300F

Light Stand

108cm

86cm

300cm

90cm

1.7kg

3kg

22mm

29.1/25.7/22.4/19mm



Lighting Stands & Mounting

290F

Heavy Duty Light Stand

110cm

110cm

286cm

130cm

2.2kg

5kg

22mm

35/30/25mm



380F

Heavy Duty Light Stand

110cm

110cm

380cm

145cm

2kg

5kg

22mm

35/30/25/20mm



240CS

C-Stand with Arm (Silver)

95cm

130cm

237cm

158cm

6kg

10kg

25mm

35/30/25mm



270CS

C-Stand with Arm (Silver)

95cm

140cm

270cm

168cm

6.3kg

10kg

25mm

35/30/25mm



240FS

Wheeled Light Stand

110cm

120cm

240cm

35cm

6.3kg

10kg

35mm



420LB

Light Boom Stand with Weight Bag

109cm

125cm

422cm

129cm

4.3kg

5kg

25mm

36/30/25/20mm



LA-300

Light Stand


100cm


88.5cm


300cm


88cm


1.86kg


3kg


22mm


35/25mm



LA-302

Light Stand


70cm


70cm


190cm


66cm


0.65kg


5kg


16mm


22/16mm



LA-303

Light Stand


112cm


97cm


260cm


97cm


1.5kg


6kg


22mm


31.5/25.7mm



LA-304

Light Stand


80cm


73cm


200cm


70cm


1.037kg


5kg


19mm


25/22/19mm



BS-04

Retractable Background Stand with Carrying Bag


97cm


260cm


3


300cm



SA5015

Heady Duty Steel Roller Stand


168cm


92cm


10.4kg


40kg

Key Features

- Weight capacity of 40kg.
- Unfolded height ranges from 92cm to 168cm.
- Features adjustable legs for versatility.
- Equipped with a 1-1/8" Junior receiver.
- Comes with a retractable 5/8" pin which can be swung 90 degrees.



SA5045

Heady Duty Steel Roller Stand


450cm


146cm


16.2kg


40kg

Key Features

- Weight capacity of 40kg.
- Unfolded height ranges from 146cm to 450cm.
- Features adjustable legs for versatility.
- Equipped with a 1-1/8" Junior receiver.
- Comes with a retractable 5/8" pin which can be swung 90 degrees.



Lighting Stands & Mounting

FH01

Light Boom Holder



Designed for mounting a boom arm to a heavy-duty stand. It makes tilt and swivel adjustments of the boom arm quick and simple.

FH02

Lighting Holder



The FH02 Lighting Holder is designed to accept an umbrella and light or two lights for easy attachment to a standard light stand.

FH03

Reflector Boom Holder



The FH03 Reflector Boom Holder allows you to attach up to two RMA-01 reflector mounting arms onto a light boom.

LSA-14

Boom Extension Arm



Easily extended, good stability, high load capacity.

LSA-15

Boom Extension Arm



This boom arm with clamp features aluminum construction and is telescopically adjustable between 27.5 and 67" in length.

LSA-16

Boom Arm with Reflector Holder



The boom arm has a large handle that allows angle adjustments and locks it in place by friction.

RMA-01

Reflector Mounting Arm

Reflector Mounting Arm can hold a wide variety of reflectors with its plastic clips. The arm mounts to a light stand via its mini grip head which allows it to be turned to obtain the required angle for the desired degree of reflectors.



Carrying Bag

CB Series

LS-01

Multi-function Clamp



Multi-function Clamp can be installed on the light stand to attach small studio accessories or hang objects.

LS-02

Multi-function Clamp



LSA-03/LSA-19

Nano Clamp/Clamp



LSA-19 clamp is compact accessory that allows you to attach with V-mount accessories such as V-mount batteries. Use it with Godox LSA-03 nano clamp you can mount them to a light stand or tripod easily.

LSA-06

Wheel for Light Stand



Step-On lock design locks the wheel from rolling

LSA-07

Wheel for Light Stand



LSA-08

Flexible Arm



Flexible and strong enough to hold Shoe-Mount strobes at all angles to reduce unwanted reflections

LSA-09

Heavy Duty Flexible Arm



The two arms can be freely adjusted and locked by the knob

LSA-04

Magic Arm



LSA-05

Extension Arm



The extension arm is designed for attaching to a Convi clamp for hanging a light or a camera from a light stand or pole

LSA-13

Sky Hook



For hanging accessories

LSA-11

Laptop Tray



An aluminum platform to hold your laptop on a camera stand. Especially held on the laptop tray LSA-12, the cables of the laptop can be fixed on all edges of the holder with cable ties, thus preventing them being pulled out.

LSA-12

Laptop Tray



LSA-10

Dual Mount Arm



The dual mount arm features four separate mounting points-two heads on the sides of the arm and two heads on a 90°perpendicular angle





CB-32

Dimensions: 46.5*22.5*35cm
Recommended placing items: ML30-K2/ML30Bi-K2



CB-33

Dimensions: 55*24*39cm
Recommended placing items: ML-Kit1/ML-Kit2



CB-23

Dimensions: 37.7*17*8.5cm
Recommended placing items: TL30-K2



CB-39

Dimensions: 77.5*22.5*7.5cm
Recommended placing items: TL60-K2



CB-22

Dimensions: 37.7*26.7*8.5cm
Recommended placing items: TL30-K4



CB-40

Dimensions: 78*36.5*8cm
Recommended placing items: TL60-K4



CB-05

Dimensions: 74*26*27cm
Recommended placing items: SL60W Two Light Kit



CB-08

Dimensions: 52*30*39.5cm
Recommended placing items:
LED500C/LED500W/LED500LRC Kit-1/LED500LRC Kit-2



CB-14

Dimensions: 52*15*15cm
Recommended placing items: S30-D light stand



CB-52

Dimensions: 53*16*16cm
Recommended placing items: S60Bi Light stand



CB-04

Dimensions: 78*24*24cm
Recommended placing items: SL100D-K2/SL100Bi-K2



CB-08

Dimensions: 52*30*39.5cm
Recommended placing items:
LED500C/LED500W/LED500LRC Kit-1/LED500LRC Kit-2



CB-49

Dimensions: 55*26*39cm
Recommended placing items: M300D



CB-34

Dimensions: 136*29.5*61cm
Recommended placing items: M600D



CB-37

Dimensions: 57.5*30.5*28cm
Recommended placing items: VSA-19K/VSA-26K/VSA-36K



CB-47

Dimensions: 125.2cm*29.3cm*12.9cm
Recommended placing items: TL120-K4



CB-51

Dimensions: 38.5*27*64cm
Recommended placing items: S60Bi-K3



CB-64

Dimensions: 57*29.5*24cm
Recommended placing items: VL300II



CB-63

Dimensions: 51*29.5*24cm
Recommended placing items: VL200II



CB-62

Dimensions: 51*29.5*24cm
Recommended placing items: VL150II



CB-65

Dimensions: 36*29.5*64cm
Recommended placing items: M600Bi



CB-66

Dimensions: 69*26.5*29cm
Recommended placing items: FL100-K2/FL150S-K2 kit