


Godox



LT1

使用手册
Instruction Manual V1.0

固件 Firmware V1.00

重要安全说明

使用前请务必仔细阅读本手册，并严格遵守以下安全注意事项。



危险

- 本设备为摄影灯具，禁止儿童单独使用。儿童靠近时，监护人需全程密切看护，防止因碰撞或擅自操作引发人身伤害。
- 若外壳出现开裂、变形、进液、异味或异常发热等情况，请立即停止使用。
- 仅限使用原厂配件，或经制造商明确推荐的配件；否则可能导致火灾、电击或人身伤害。



警告

- 本设备不具备防水防尘功能，禁止在雨天、高湿度、多尘环境中使用。
- 若设备进水或受潮，请立即切断电源，并断开所有连接线缆。
- 严禁在酒精、汽油等易燃易爆气体或液体附近使用本设备。
- 严禁遮挡或堵塞设备散热孔，以防过热引发危险。
- 严禁私自拆卸或改装设备。非授权拆解易导致电路故障或永久性损坏。如需维修，请联系神牛授权服务中心。

物品清单



灯体 × 1



USB-C 充电线 × 1




使用手册 × 1

注：

1. 开箱后核对所购套装内的物品，若有缺失或破损，及时联系客服。
2. 图示仅供参考，具体以实际产品为准。

部件名称


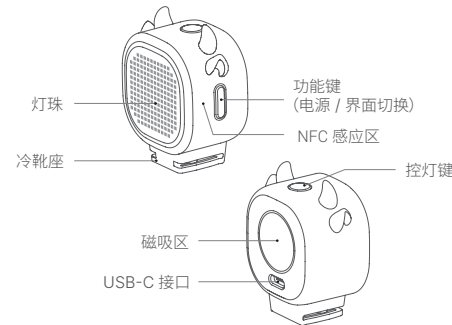


使用说明

1. 安装

冷靴座：插入相机热靴座，直至稳固(无电子触点，仅物理固定)。

磁吸区：内置磁铁，可吸附于任意铁质表面。



2. 电源开关

长按功能键，实现开机或关机。

3. 应用程序连接

扫描二维码或在应用商店搜索“Godox Light”下载安装。



3.1 蓝牙重置

短按功能键切换至蓝牙配对界面(四位 MAC 编码)，长按控灯键 3 秒，右上角绿灯点亮即完成重置，随后松开控灯键。

3.2 蓝牙配对



打开应用程序，选择“蓝牙添加”，搜索并连接 LT1 及其他需受控的神牛灯具。

3.3 NFC 速连

开启移动设备 NFC 功能，应用程序内选择“NFC 添加”，贴近本设备 NFC 感应区即可自动配对。

3.4 控灯模式

- 短按功能键切换至电池界面，等待 1 秒(期间请勿操作控灯键)，再长按控灯键 3 秒进入控灯模式；
- 短按控灯键，即可一键开启(绿灯泡界面) / 关闭(红灯泡界面)已受控灯具；
- 再次长按控灯键 3 秒，退出控灯模式。




3.5 固件升级

在应用程序的设备列表中点击 [:] 选择固件升级，将自动检测新版本，请按提示操作。

4. 电源管理

低电量提示：电量低于 10% 时，设备自动跳转至电池界面，并连续闪烁 3 次提示。

充电：使用标配充电线连接 USB-C 接口与电源适配器(另购)，再接通电源。



技术参数

产品名称	神牛 LED 创意像素灯
产品型号	LT1
锂电池	3.7 V, 400 mAh, 1.48 Wh
USB-C 接口	输入:5V $\equiv$ 1A
控制方式	应用程序、灯体控制
蓝牙控制距离	最远 15 米
工作环境温度	-10°C ~ 40°C
尺寸(不含附件)	37 × 27 × 48 mm
净重(不含附件)	≈ 37 g

注:产品设计与规格如有变更,恕不另行通知。

维护保养

- 清洁前务必关机并断开电源。仅可使用干燥软布擦拭，严禁使用酒精、苯或其他挥发性溶剂。
- 为延长电池寿命，长期闲置时须每 3 个月进行维护性充电，建议电量保持在 40%~60%。

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

Important Safety Instructions

Read this manual thoroughly before use and strictly observe the following safety precautions.


DANGER

- This device is a photography light. Do not allow children to use it alone. When children are nearby, guardians must provide continuous close supervision to prevent personal injury from collision or unauthorized operation.
- Stop using immediately if the housing is cracked or deformed, if liquid enters the device, or if it emits a strange odor or becomes abnormally hot.
- Use only original accessories or accessories specified by the manufacturer. Failure to do so may result in fire, electric shock, or personal injury.

WARNING


- This device is NOT waterproof or dustproof. Do not use in rain, high humidity, or dusty environments.
- If liquid enters the device or it becomes damp, disconnect the power immediately and remove all cables.
- Strictly do not use near flammable or explosive gases or liquids (e.g., alcohol, gasoline).
- Strictly do not block or obstruct the air vents to prevent overheating.
- Do not disassemble or modify the device without authorization. Unauthorized disassembly may result in circuit malfunction or permanent damage. Contact an authorized Godox service center for repairs.

What's Inside

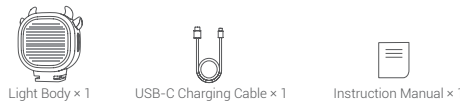

Note:
1. Check the package contents after unboxing. If any items are missing or damaged, contact the dealer immediately.
2. Illustrations are for reference only and may differ from the actual product.


Names of Parts

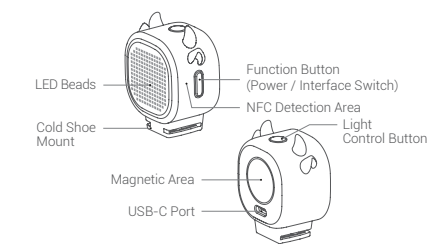

Operation

1. Installation

Cold Shoe Mount: Insert into the camera hot shoe until secure (no electronic contacts, for physical mounting only).
Magnetic Area: Built-in magnets allow attachment to any ferrous metal surface.

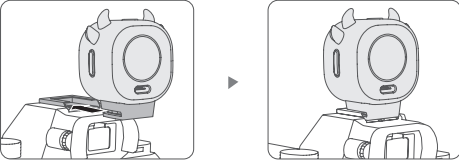

2. Power Switch

Long press the Function Button to power on or off.

3. App Connection

Scan the QR code or search for "Godox Light" in the app store to download and install.



3.1 Bluetooth Reset

Short press the Function Button to switch to the Bluetooth pairing interface (four-digit MAC code). Long press the Light Control Button for 3 seconds; the green light in the upper right corner will illuminate to indicate reset completion, then release the Light Control Button.

3.2 Bluetooth Pairing


Open the app, select "Add Bluetooth", then search for and connect the LT1 and other Godox lights to be controlled.

3.3 NFC Quick Connection

Enable the NFC function on the product's screen. Select "Add via NFC" in the app, and place the device close to the product's NFC detection area for automatic pairing.

3.4 Light Control Mode

- Short press the Function button to switch to the battery screen. Wait for 1 second (do not press the Light Control button during this time), then long press the Light Control button for 3 seconds to enter Light Control Mode.
- Short press the Light Control button to toggle the controlled lights on (green bulb icon) or off (red bulb icon).
- Long press the Light Control button again for 3 seconds to exit Light Control Mode.

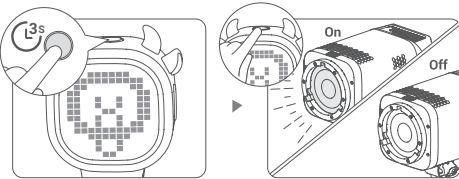


3.5 Firmware Upgrade

Tap [] in the device list of the App and select Firmware Update. The system will automatically detect new versions; please follow the on-screen prompts to proceed.

4. Power Management

Low Battery Warning: When the battery level drops below 10%, the device automatically switches to the battery screen and flashes 3 times in succession as a warning.

Charging: Connect the included power cable to the USB-C port and a power adapter (sold separately). Then plug the poweradapter into a power source.



Technical Data

Product Name	Godox LED Creative Pixel Light
Product Model	LT1
Li-ion Battery	3.7 V, 400 mAh, 1.48 Wh
USB-C Port	Input: 5V $\pm$ 1A
Control Method	App, On-Board Control
Bluetooth Control Distance	Up to 15 m
Operating Temperature	-10°C ~ 40°C
Dimensions (without accessories)	37 $\times$ 27 $\times$ 48 mm
Net Weight (without accessories)	$\approx$ 37 g

Note: Product design and specifications are subject to change without notice.

Maintenance

- Power off and disconnect the power supply before cleaning. Use a dry, soft cloth only. Strictly do not use alcohol, benzene, or other volatile solvents.
- To maintain battery health, perform a maintenance charge every 3 months during long-term storage. It is recommended to keep the battery level at 40% - 60%.

FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction. The use distance is not more than 5mm.

IC Warning

This device complies with Innovation, Science and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:
(1) This device may not cause interference, and
(2) This device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme aux normes RSS exemptées de licence d'Innovation, Sciences et Développement économique Canada. L'exploitation est soumise aux deux conditions suivantes:
(1) Cet appareil ne peut pas causer d'interférences, et
(2) Cet appareil doit accepter toute interférence, y compris celles qui pourraient entraîner un fonctionnement accidentel de l'appareil.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
Tout changement ou modification non expressément approuvé par la partie responsable de la réglementation de l'OCDE peut faire perdre à l'utilisateur le droit d'utiliser l'appareil. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

Remarque: cet appareil a été testé pour répondre aux limites des appareils numériques de classe B conformément à la partie 15 des règles de la Federal Communications Commission des États-Unis. Ces limites sont conçues pour fournir une protection raisonnable contre les interférences nuisibles dans les installations résidentielles. L'appareil génère de l'énergie RF utilisée et rayonne, ce qui peut causer des interférences nocives pour les communications radio s'il n'est pas installé et utilisé conformément aux instructions. Cependant, aucun Garantie contre les interférences dans une installation spécifique. Si l'appareil cause des interférences nuisibles à la réception de la radio ou de la télévision, qui peuvent être déterminées en éteignant et en allumant l'appareil, l'utilisateur est encouragé à tenter de corriger les interférences par une ou plusieurs des mesures suivantes:
- redirection ou repositionnement de l'antenne de réception.
- augmenter l'espace entre l'appareil et le récepteur.
- Connecter l'appareil à une prise sur un circuit différent de celui auquel le récepteur est connecté.
- consultez votre revendeur ou un technicien radio / tv expérimenté pour obtenir de l'aide.
RF warning for Portable device:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.
Avertissement RF pour les appareils portables:
L'appareil a été évalué pour répondre aux exigences générales d'exposition aux radiofréquences. L'équipement Peut être utilisé sans restriction dans des conditions d'exposition portables.

Warning

Operating frequency: 2402 MHz ~ 2480 MHz
Maximum EIRP Power: 5 dBm

Declaration of Conformity

GODOX Photo Equipment Co., Ltd. hereby declares that this equipment are in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. In accordance with Article 10(2) and Article 10(10), this product is allowed to be used in all EU member states. For more information of DoC, Please click this web link <https://www.godox.com/eu-declaration-of-conformity/>. The device complies with RF specifications when the device used at 0mm from your body.



制造商: 深圳市神牛摄影器材有限公司
地址: 深圳市宝安区南海神庙社区海山工业园厂房 2 栋
电话: 0755-29609320 (8062) 传真: 0755-25723423
邮箱: godox@godox.com 网址: Godox.com
MANUFACTURER: GODOX Photo Equipment Co., Ltd.
Add: Building 2, Yaohuan Industrial Zone, Tangwei Community, Shekou Street, Bao'an District, Shenzhen 518103, China
Tel: +86-755-29609320(8062) Fax: +86-755-25723423
E-mail: godox@godox.com Website: Godox.com
Copyright © 2025 Godox All Rights Reserved.
中国制造 Made in China 1705-LT1000-00

